

TWO-SPOKE HANDWHEEL WITH FOLDAWAY HANDLE AND KEY LOCK

Handwheels for mobile storage cabinets mounted on a trackway

This product type is a variation of our traditional handwheel D207-350. By simply adding a special assembly kit this product adapts to the requirements of a particular market: the mobile shelving market (mobile storage cabinets mounted on a trackway). This handwheel is used to move the shelving along the trackway. A fitted lock or locking piston serves to lock, stop, position the shelving units in certain positions.

Materials:

Reinforced and stabilized polyamide. Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Alternative cap colours:

Orange	(RAL 2004 code 02).
Blue	(RAL 5015 code 07).
Yellow	(RAL 1021 code 10).
Red	(RAL 3000 code 16).
Green	(RAL 6024 code 17).
Black	(RAL 9011 code 01).

Clamping lock kit:

- (1) PA6+GF hole cover ring. Colour Black (RAL 9011). Push-fit assembly. Removable.
- (2) PA6+GF piston holder. Colour Black (RAL 9011). Assembly with two self-tapping, galvanised steel screws, screwdriver head 3.5x30.
- (3) Nickel plated lock. Two numbered keys provided. Key can be removed from either position. To close the handwheel push and turn the key by 90°. Lock stroke 10 mm. Useful projection of pin from handwheel 8 mm. Keys supplied secured to the handwheel rim.

Inserts:

- Galvanised steel insert with smooth through bore (tolerance H10).
- (Includes 6 mm keyway).
- (4) Black-oxide treated hexagon socket button head screw ISO 7838 for fastening handle.



BOTECO
BY TROST & ZONEN
Copyright ©



BOTECO
BY TROST & ZONEN
Copyright ©



BOTECO
BY TROST & ZONEN
Copyright ©

Lateral handle:

Flush, foldaway revolving handle in handwheel M202
 "Euromodel", with hexagonal connection. PA6+GF handle, black
 RAL 9011. Black-oxide treated internal mechanism. Fixed with
 black-oxide treated hexagon socket button head screw ISO
 7838. Handle cap in grey polyamide (RAL 7035 code 13).

Fixing method:

For fixing systems, or execution of keyways or square holes,
 please refer to the technical notes attached to the catalogue.

Special requests:

On request and with a minimum of 50 pieces, the inserts can be
 supplied with the hole d1 with H7 tolerance and black-oxide
 finish.

Upon request and for special quantities inserts can be supplied
 with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied
 in different materials/with different coatings.


Upon request and for special quantities available in the colours
 indicated in the chart.



BOTECO
 by Unipersonale
 Copyright ©



BOTECO
 by Unipersonale
 Copyright ©

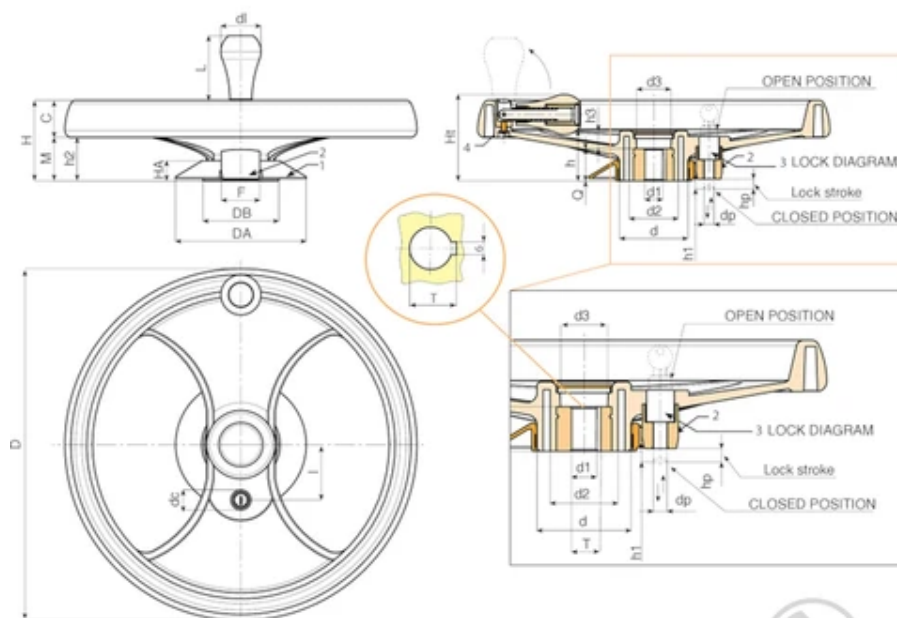

© Copyright
 Boteco srl Unipersonale

Code	Art.	D	H	Ht	h	d	M	C	h2	h3	d2	d3	Dm	d1H10	T	Q	I
D603350.0004	D603350.TD2001H	346	80	86	49.5	67.5	24	56	43.5	17.5	49	35	28	20	22,8	32	55

Dm = Maximum obtainable diameter for subsequent machining. (widening)

A.R. = Upon request, for a minimum of 50 pieces.

Code	Art.	dc	h1	dp	hp	DA	HA	DB	F	Weight (g)
D603350.0004	D603350.TD2001H	20	8	10	10	131	20	76	38	1800

Dm = Maximum obtainable diameter for subsequent machining. (widening)

A.R. = Upon request, for a minimum of 50 pieces.