

05

CRANK HANDLE WITH SMOOTH BORE INSERT AND REVOLVING HANDLE M129

Crank handles with smooth bore

Material:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Alternative Cap colours:

Orange (RAL 2004 code 02).

Red (RAL 3000 code 16).

Blue (RAL 5015 code 07).

Green (RAL 6024 code 17).

Yellow (RAL 1021 code 10).

Black (RAL 9011 code 01).

Inserts:

Galvanised steel insert with smooth through bore (tolerance H10).

Lateral insert:

Brass insert with threaded through hole.

Lateral handle:

Revolving handle art. M129.

Special requests:


Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.

Upon request and for special quantities available in the colours indicated in the chart.



BOTECO
Copyright ©

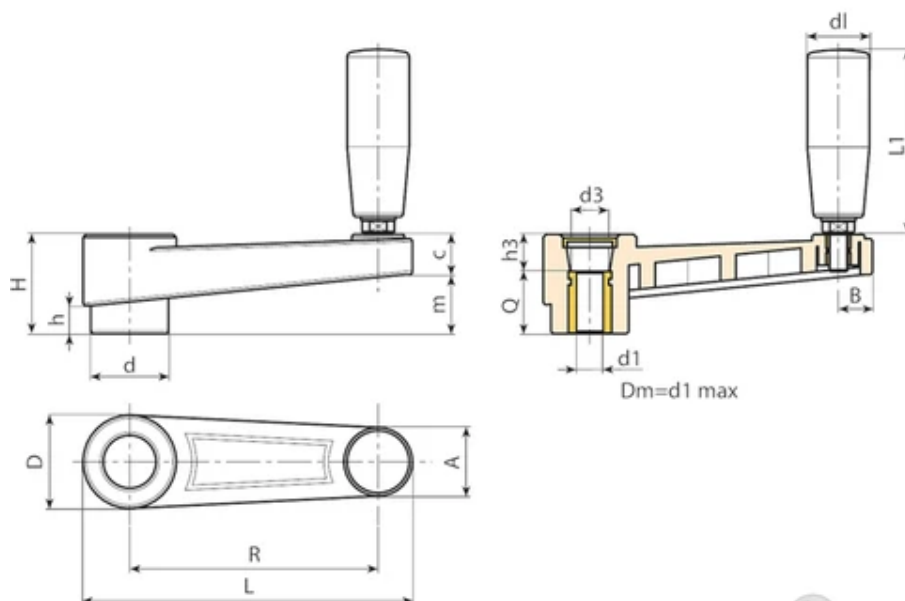


 AN ESSENTIA COMPANY
 Copyright ©

Code	Art.	L	R	H	D	d	m	c	A	B	h	d3	h3	dm	d1 H10	Q	d1
E222065.0008	E222065.TP0501	89	65	30	27,5	22	17	13	20	9,5	8	14,5	10	12	5	20	20
E222065.0003	E222065.TD1001	89	65	30	27,5	22	17	13	20	9,5	8	14,5	10	12	10	20	20
E222065.0004	E222065.TD1201	89	65	30	27,5	22	17	13	20	9,5	8	14,5	10	12	12	20	20
E222080.0013	E222080.TP0501	107	80	33,5	32	26	20,5	13	23	11	9	19,5	9,5	14	5	24	20
E222080.0003	E222080.TD1001	107	80	33,5	32	26	20,5	13	23	11	9	19,5	9,5	14	10	24	20
E222080.0005	E222080.TD1201	107	80	33,5	32	26	20,5	13	23	11	9	19,5	9,5	14	12	24	20
E222110.0001	E222110.TD0801	140	110	39	35	29	25	14	24	12	11	19,5	11	14	8	28	23,5
E222110.0007	E222110.TD1001	140	110	39	35	29	25	14	24	12	11	19,5	11	14	10	28	23,5
E222110.0004	E222110.TD1201	140	110	39	35	29	25	14	24	12	11	19,5	11	14	12	28	23,5
E222140.0001	E222140.TD0801	175	140	49	44	35,5	32	17	27	13	15,5	24	19	20	8	30	25
E222140.0003	E222140.TD1201	175	140	49	44	35,5	32	17	27	13	15,5	24	19	20	12	30	25
E222140.0004	E222140.TD1401	175	140	49	44	35,5	32	17	27	13	15,5	24	19	20	14	30	25
E222140.0005	E222140.TD1601	175	140	49	44	35,5	32	17	27	13	15,5	24	19	20	16	30	25
E222185.0001	E222185.TD0801	223	185	55	47,5	40	38,5	16,5	27	14	17	29,5	21	22	08	34	26
E222185.0004	E222185.TD1201	223	185	55	47,5	40	38,5	16,5	27	14	17	29,5	21	22	12	34	26

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

Code	Art.	L1	Weight (g)
E222065.0008	E222065.TP0501	52	111

Code	Art.	L1	Weight (g)
E222065.0003	E222065.TD1001	52	117
E222065.0004	E222065.TD1201	52	114
E222080.0013	E222080.TP0501	52	135
E222080.0003	E222080.TD1001	52	140
E222080.0005	E222080.TD1201	52	136
E222110.0001	E222110.TD0801	63	182
E222110.0007	E222110.TD1001	63	179
E222110.0004	E222110.TD1201	63	175
E222140.0001	E222140.TD0801	72	271
E222140.0003	E222140.TD1201	72	265
E222140.0004	E222140.TD1401	72	261
E222140.0005	E222140.TD1601	72	255
E222185.0001	E222185.TD0801	82	450
E222185.0004	E222185.TD1201	82	442

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).