

SOLID BAKELITE LOBED KNOB WITH THREADED STUD

Bakelite handwheels

Materials:

- Phenolic resin.
- Resistant to oils and greases.
- Resistant to high temperatures.

Surface finish:

Glossy.

Colour:

Black (RAL 9011).

Inserts:


Galvanised steel threaded stud (thread tolerance 6g)

Special requests:

None.



BOTECO
AN ESSENTIA COMPANY
Copyright ©

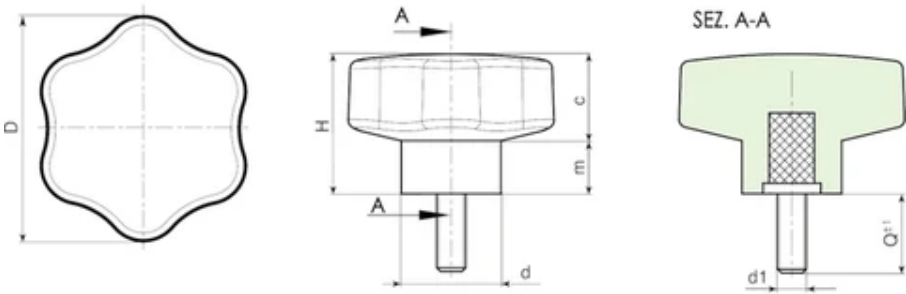

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	D	d	H	m	c	LM	d1 6g	Q	Weight (g)
F20230.0002	F20230.BM05X2001	30	17	25	11	14	60	M5	20	16
F20230.0003	F20230.BM05X3001	30	17	25	11	14	60	M5	30	16

Code	art.	D	d	H	m	c	LM	d1 6g	Q	Weight (g)
F20230.0004	F20230.BM05X4001	30	17	25	11	14	60	M5	40	16
F20230.0005	F20230.BM05X5001	30	17	25	11	14	60	M5	50	16
F20230.0006	F20230.BM05X6001	30	17	25	11	14	60	M5	60	16
F20240.0002	F20240.BM06X2001	40	21	28	13	15	60	M6	20	-
F20240.0003	F20240.BM06X3001	40	21	28	13	15	60	M6	30	-
F20240.0004	F20240.BM06X4001	40	21	28	13	15	60	M6	40	-
F20240.0005	F20240.BM06X5001	40	21	28	13	15	60	M6	50	-
F20240.0006	F20240.BM06X6001	40	21	28	13	15	60	M6	60	-
F20240.0008	F20240.BM08X2001	40	21	28	13	15	60	M8	20	-
F20240.0009	F20240.BM08X3001	40	21	28	13	15	60	M8	30	-
F20240.0010	F20240.BM08X4001	40	21	28	13	15	60	M8	40	-
F20240.0011	F20240.BM08X5001	40	21	28	13	15	60	M8	50	-
F20240.0012	F20240.BM08X6001	40	21	28	13	15	60	M8	60	-
F20250.0008	F20250.BM08X2001	50	23	34	12	22	60	M8	20	73
F20250.0009	F20250.BM08X3001	50	23	34	12	22	60	M8	30	73
F20250.0010	F20250.BM08X4001	50	23	34	12	22	60	M8	40	73
F20250.0011	F20250.BM08X5001	50	23	34	12	22	60	M8	50	73
F20250.0012	F20250.BM08X6001	50	23	34	12	22	60	M8	60	73
F20250.0013	F20250.BM10X2001	50	23	34	12	22	60	M10	20	90
F20250.0014	F20250.BM10X3001	50	23	34	12	22	60	M10	30	90
F20250.0015	F20250.BM10X4001	50	23	34	12	22	60	M10	40	90
F20250.0016	F20250.BM10X5001	50	23	34	12	22	60	M10	50	90
F20250.0017	F20250.BM10X6001	50	23	34	12	22	60	M10	60	90
F20260.0008	F20260.BM10X2001	60,5	28	40	15	25	60	M10	20	112
F20260.0009	F20260.BM10X3001	60,5	28	40	15	25	60	M10	30	112
F20260.0010	F20260.BM10X4001	60,5	28	40	15	25	60	M10	40	112
F20260.0011	F20260.BM10X5001	60,5	28	40	15	25	60	M10	50	112
F20260.0012	F20260.BM10X6001	60,5	28	40	15	25	60	M10	60	112
F20260.0014	F20260.BM12X2001	60,5	28	40	15	25	60	M12	20	120
F20260.0015	F20260.BM12X3001	60,5	28	40	15	25	60	M12	30	120
F20260.0016	F20260.BM12X4001	60,5	28	40	15	25	60	M12	40	120
F20260.0017	F20260.BM12X5001	60,5	28	40	15	25	60	M12	50	120
F20260.0018	F20260.BM12X6001	60,5	28	40	15	25	60	M12	60	120

LM = maximum mouldable length.