

06

6-LOBE HANDWHEEL WITH STEEL HUB AND THREADED HOLE

6-lobe handwheels

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

F275:

Galvanised steel insert with female threaded hole (thread tolerance 6H).

F275CIN:

Stainless steel insert with female threaded hole (Aisi 303) (thread tolerance 6H).


Special Requests:

Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities available in the colours indicated in the chart (attention: reduced range).



BOTECO
Copyright ©

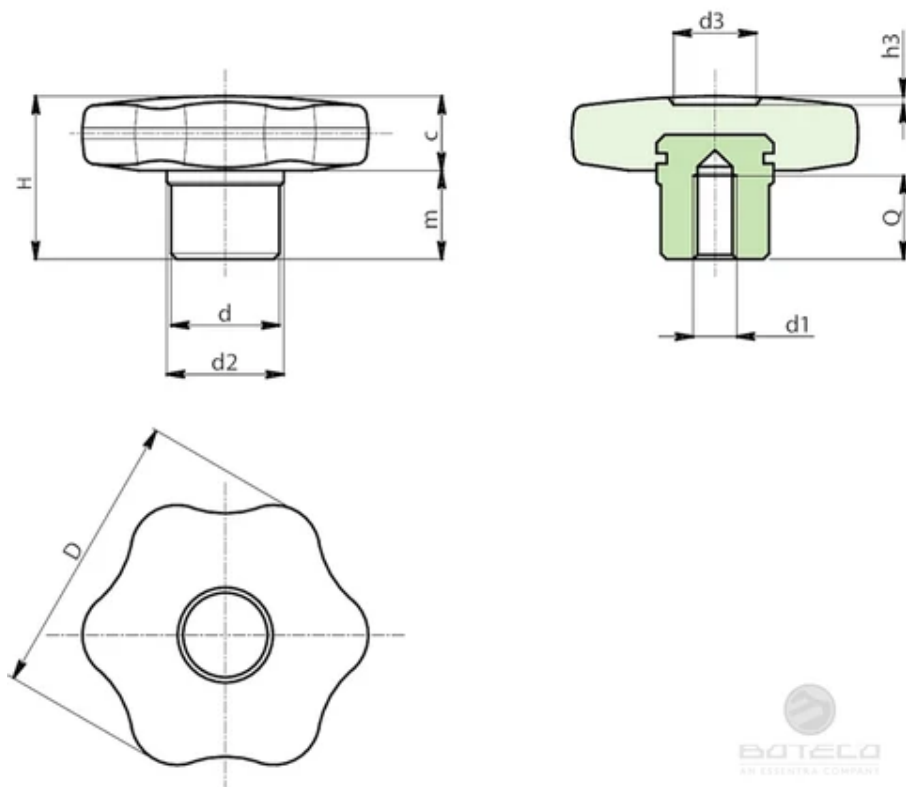

Version F275: Galvanised steel hub.

Code	Art.	D	d	d2	H	m	c	d1 6H	Q	Weight (g)
F27530.0001	F27530.TM0601	30	13	15	22	11	11	M6	12	25
F27540.0001	F27540.TM0801	40	15	17	24	12	12	M8	14	39
F27550.0002	F27550.TM1001	50	18	20	29	15	14	M10	16	66
F27560.0001	F27560.TM1201	60	20	24	34	18	16	M12	20	105

Version F275 CIN: Stainless steel hub (Aisi 303).

Code	Art.	D	d	d2	H	m	c	d1 6H	Q	Weight (g)
F27530.0002	F27530.TM0601CIN	30	13	15	22	11	11	M6	12	25
F27540.0002	F27540.TM0801CIN	40	15	17	24	12	12	M8	14	39
F27550.0003	F27550.TM1001CIN	50	18	20	29	15	14	M10	16	66
F27560.0002	F27560.TM1201CIN	60	20	24	34	18	16	M12	20	105