

07

## 4 LOBE HANDWHEEL WITH INDEXED INSERT (PUSH TO USE) AND THREADED INSERT

4-lobe handwheels

### Materials:

(3-4) Special high resistance glass fiber reinforced technopolymer.

Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

(3-4)Black. (RAL 9011).

### Central fixing button:

(1) Red polyamide button (RAL 3000 code 16).

### Alternative handwheel and button colour:

|        |                     |
|--------|---------------------|
| Orange | (RAL 2004 code 02). |
| Blue   | (RAL 5015 code 07). |
| Yellow | (RAL 1021 code 10). |
| Red    | (RAL 3000 code 16). |
| Green  | (RAL 6024 code 17). |
| Grey   | (RAL 7035 cod. 13). |
| Black  | (RAL 9001 code 01). |

### Inserts:

Brass insert with female threaded hole (thread tolerance 6H).

### Spring:

Stainless steel spring (Aisi 302).


### Special requests:

Upon request and for special quantities inserts can be supplied in different materials.

Upon request and for special quantities available in the colours indicated in the chart.



BOTECO  
Copyright ©

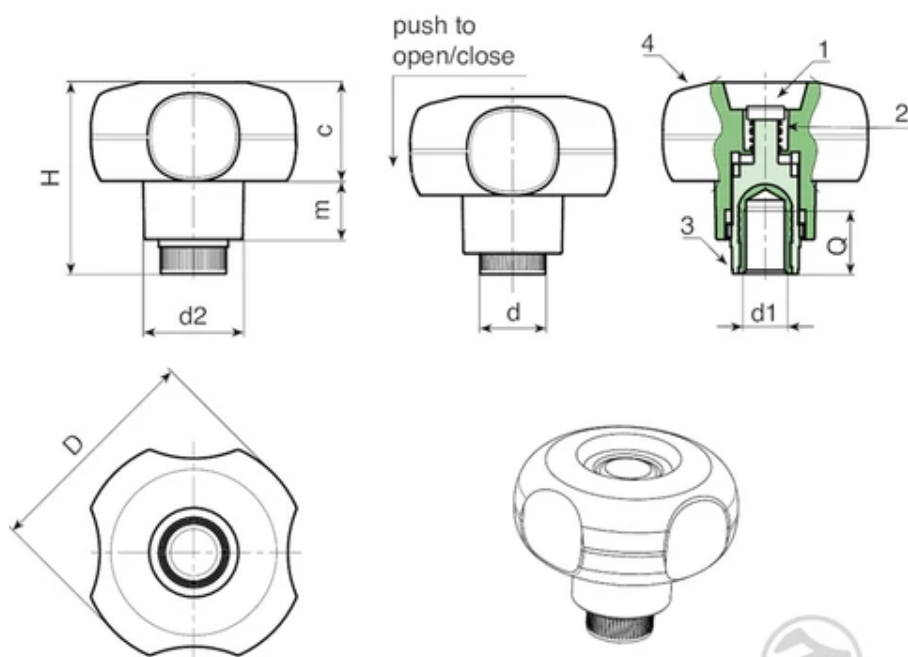

© Copyright  
BOTECA srl Unipersonale

| Code        | art.            | D  | H    | d2 | d  | m  | c  | d16H | Q  | Weight (g) |
|-------------|-----------------|----|------|----|----|----|----|------|----|------------|
| G63050.0001 | G63050.TM060116 | 49 | 42.5 | 22 | 15 | 13 | 22 | M6   | 14 | 37         |
| G63050.0004 | G63050.TM080116 | 49 | 42.5 | 22 | 15 | 13 | 22 | M8   | 14 | 37         |
| G63050.0006 | G63050.TM100116 | 49 | 42.5 | 22 | 15 | 13 | 22 | M10  | 14 | 38         |