

07

## 4-LOBE HANDWHEEL WITH ELONGATED HUB AND THREADED STUD

4-lobe handwheels

### Materials:

Reinforced polyamide. Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).

### Inserts:

Galvanised steel threaded stud (thread tolerance 6g).




BOTECO  
Copyright ©

### Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths.

Upon request and for special quantities inserts can be supplied in different materials.

Upon request and for special quantities handwheels can be supplied with custom hubs.

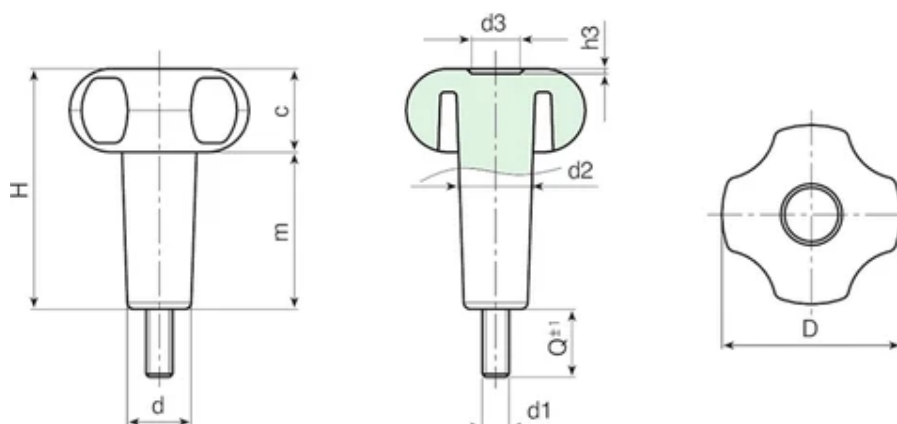

BOTECO  
AN ESSENTIA COMPANY  
Copyright ©

| Code        | art.               | D  | H  | m    | d    | c  | d2 | d3 | h3  | LM | d1 6g | Q  | Weight (g) |
|-------------|--------------------|----|----|------|------|----|----|----|-----|----|-------|----|------------|
| G73530.0008 | G73530.T35M06X1501 | 30 | 47 | 33.5 | 13.5 | 14 | 15 | 12 | 2   | 65 | M6    | 15 | 23         |
| G73530.0013 | G73530.T35M08X3001 | 30 | 47 | 33.5 | 13.5 | 14 | 15 | 12 | 2   | 65 | M8    | 30 | 36         |
| G73540.0003 | G73540.T35M08X2001 | 41 | 54 | 35   | 16.5 | 19 | 17 | 12 | 3   | 80 | M8    | 20 | 49         |
| G73540.0013 | G73540.T35M10X1501 | 41 | 54 | 35   | 16.5 | 19 | 17 | 12 | 3   | 80 | M10   | 15 | 54         |
| G73550.0009 | G73550.T40M08X1501 | 52 | 61 | 39   | 17.5 | 22 | 19 | 14 | 2.5 | 90 | M8    | 15 | 60         |
| G73550.0028 | G73550.T40M10X4001 | 52 | 61 | 39   | 17.5 | 22 | 19 | 14 | 2.5 | 90 | M10   | 40 | 82         |
| G73550.0047 | G73550.T60M08X3001 | 52 | 80 | 58   | 18   | 22 | 21 | 14 | 2.5 | 70 | M8    | 30 | 86         |
| G73560.0018 | G73560.T60M10X4001 | 59 | 83 | 58   | 23   | 25 | 24 | 24 | 4   | 75 | M10   | 40 | 138        |

LM = Maximum mouldable length.

Customised stud length available for a minimum of 100 pieces.