

08

KNURLED HANDWHEEL WITH HUB AND THREADED STUD

Knurled handwheels with stud

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Galvanised steel threaded stud (thread tolerance 6g).

Special Requests:



Upon request and for special quantities inserts can be supplied with customised lengths.

Upon request and for special quantities inserts can be supplied in different materials.

Upon request and for special quantities available in the colours indicated in the chart.



BOTECO
AN ESSENTIA COMPANY
Copyright ©

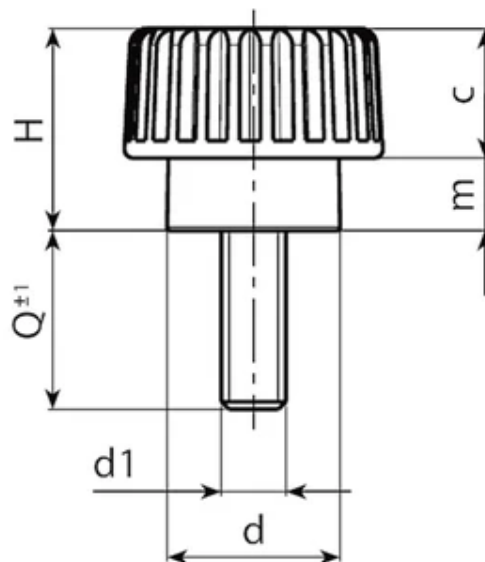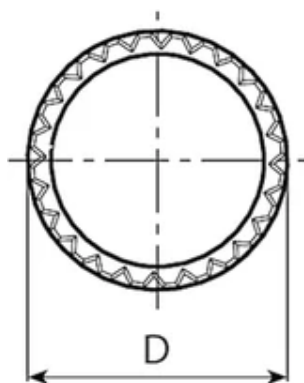

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	D	H	d	m	c	LM	d16g	Q	Weight (g)
H75915.0002	H75915.TM03X1101	15	11,5	10,5	4	7,5	70	M3	11	3
H75915.0004	H75915.TM03X2401	15	11,5	10,5	4	7,5	70	M3	24	3,5
H75915.0005	H75915.TM04X1001	15	11,5	10,5	4	7,5	70	M4	10	3,5
H75915.0009	H75915.TM04X2001	15	11,5	10,5	4	7,5	70	M4	20	4
H75915.0014	H75915.TM04X3001	15	11,5	10,5	4	7,5	70	M4	30	4,5
H75915.0020	H75915.TM05X1001	15	11,5	10,5	4	7,5	70	M5	10	4
H75915.0024	H75915.TM05X1601	15	11,5	10,5	4	7,5	70	M5	16	4,5
H75915.0025	H75915.TM05X2001	15	11,5	10,5	4	7,5	70	M5	20	5,5
H75915.0026	H75915.TM05X3001	15	11,5	10,5	4	7,5	70	M5	30	6,5
H75915.0028	H75915.TM06X1001	15	11,5	10,5	4	7,5	70	M6	10	5
H75915.0030	H75915.TM06X1601	15	11,5	10,5	4	7,5	70	M6	16	6
H75915.0032	H75915.TM06X2001	15	11,5	10,5	4	7,5	70	M6	20	7,5

LM = maximum mouldable length.

Threaded stud length on request, with a minimum quantity of 250 pieces.