

10

## UNIVERSAL LOCK WITH KNOB

1/4 turn locks M19

### Materials:

- (1) Die-cast zamak lock body M19 (stator), rotor and knob.
- (2) Elastic washer d. 24x1 with bore d. 19.4.
- (3) Galvanised steel hexagon lock nut M19x1.
- (4) Galvanised steel locking lever. (Qn design N flat - Qe design E bent outwards).
- (5) Conical steel elastic washer d. 12x1.5.
- (6) Galvanised steel Phillips dome head screw M5x8.

### Surface finish:

- (1) Nickel-plated.
- (2-5) Black oxide treated.
- (3-4-6) Standard blue galvanising.

### Rotation:


90°.

### Special Requests:

None.



BOTECO  
UNIPERSONALE  
Copyright ©

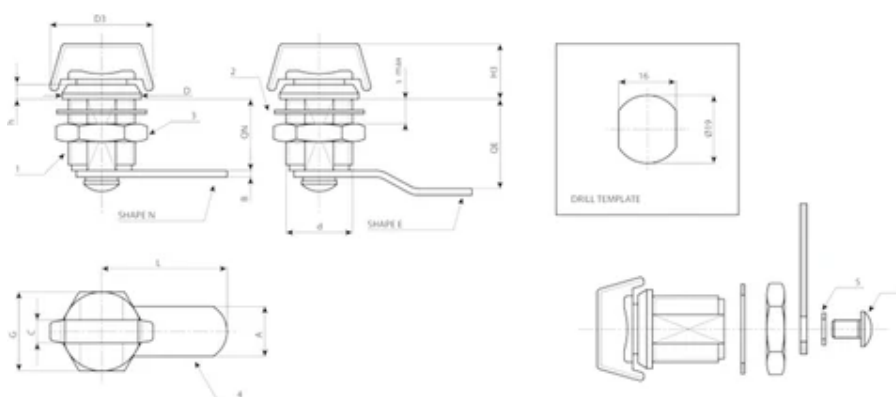

© Copyright  
Boteco unipersonale

| Code         | Art.            | A   | d   | D  | L1   | L  | Q  | E | F  | G  | H1 | Ht | H | s (max.) | s1  | Weight (g) |
|--------------|-----------------|-----|-----|----|------|----|----|---|----|----|----|----|---|----------|-----|------------|
| J130019.0004 | J130019.ZN30X20 | 6.5 | M19 | 22 | 29,5 | 30 | 20 | 0 | 14 | 22 | 15 | 31 | 4 | 6        | 2.5 | 57         |
| J130019.0001 | J130019.ZE30X25 | 6.5 | M19 | 22 | 29,5 | 30 | 20 | 5 | 14 | 22 | 15 | 31 | 4 | 6        | 2.5 | 60         |