


J300



10

LOCKING BRACKET WITH THROUGH HOLE

Plastic locks

The use of the J300 bracket must be combined with a knob with a threaded stud. An effective combination could be the one with T-handle art. L271. Used together they function as a quick locking and release system for panels of machinery in general. Particularly suitable for insulating panels of large external air conditioning chiller units.

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Hole

Smooth through hole obtained by moulding the plastic.

Special Requests:


None.



BOTECO
Copyright ©



BOTECO
Copyright ©

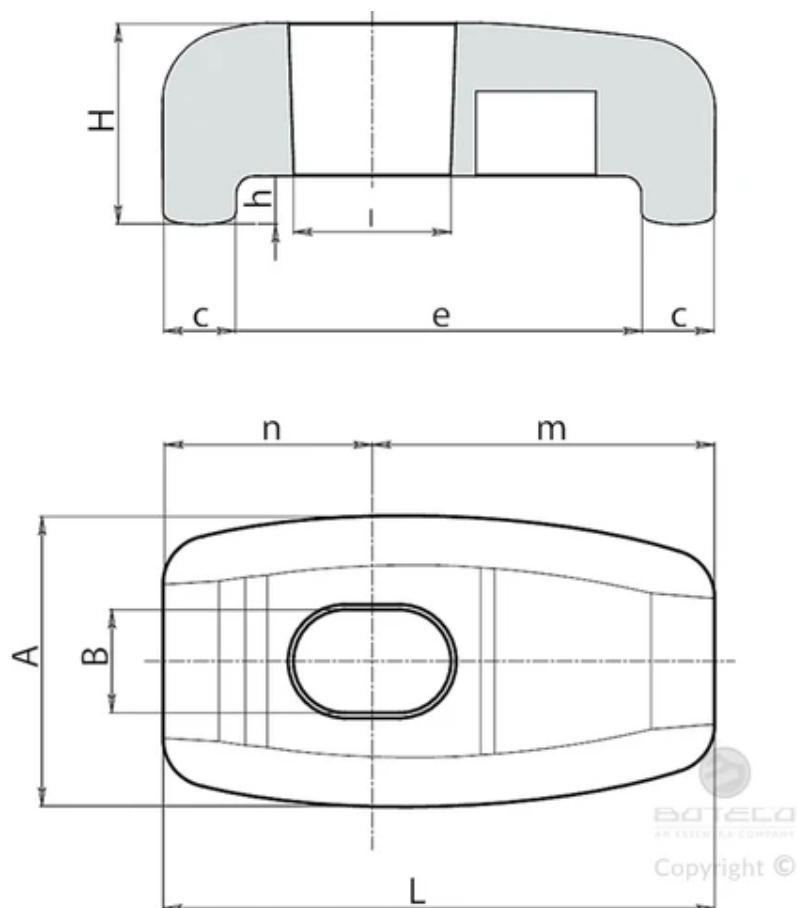

Code	Art.	A	L	H	B	l	c	e	h	n	m	Weight (g)
J30046.0001	J30046.TG08.501	24	45.5	16.5	8.5	13	6	33.5	4	17	28.5	15
J30068.0001	J30068.TG08.501	24	67.5	16.5	8.5	13	6	55.5	4	17.5	50	19