

L751



12

WING NUT WITH THREADED STUD

Standard wing nuts

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

L751:

Galvanised steel threaded stud (thread tolerance 6g).

L751CIN:

Stainless steel threaded stud (Aisi 303) (thread tolerance 6g).


Special Requests:

Upon request and for special quantities inserts can be supplied with customised lengths.

Upon request and for special quantities inserts can be supplied in different materials.

Upon request and for special quantities available in the colours indicated in the chart (attention: reduced range).



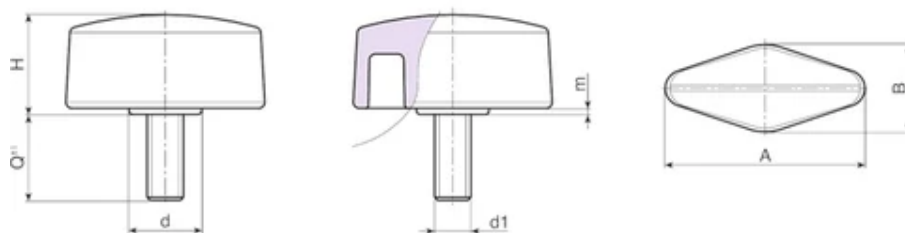

Version L751: with threaded stud in galvanised steel.

Code	Art.	A	B	H	m	d	LM	d1 6g	Q	Weight (g)
L75132.0006	L75132.TM05X1601	33	15	16.5	1	12	60	M5	16	8
L75132.0009	L75132.TM05X2501	33	15	16.5	1	12	60	M5	25	9
L75132.0011	L75132.TM05X3001	33	15	16.5	1	12	60	M5	30	11
L75132.0012	L75132.TM05X4001	33	15	16.5	1	12	60	M5	40	15
L75132.0017	L75132.TM06X1001	33	15	16.5	1	12	60	M6	10	9
L75132.0021	L75132.TM06X1601	33	15	16.5	1	12	60	M6	16	11
L75132.0029	L75132.TM06X2001	33	15	16.5	1	12	60	M6	20	12
L75132.0033	L75132.TM06X2501	33	15	16.5	1	12	60	M6	25	12
L75132.0036	L75132.TM06X3001	33	15	16.5	1	12	60	M6	30	12,5
L75132.0040	L75132.TM06X4001	33	15	16.5	1	12	60	M6	40	15,5
L75132.0047	L75132.TM08X1001	33	15	16.5	1	12	60	M8	10	13,5
L75132.0055	L75132.TM08X1601	33	15	16.5	1	12	60	M8	16	14,5
L75132.0061	L75132.TM08X2001	33	15	16.5	1	12	60	M8	20	16
L75132.0064	L75132.TM08X2501	33	15	16.5	1	12	60	M8	25	17,5
L75132.0067	L75132.TM08X3001	33	15	16.5	1	12	60	M8	30	19
L75132.0071	L75132.TM08X4001	33	15	16.5	1	12	60	M8	40	22
L75148.0001	L75148.TM06X1001	48	15	16	1	12.5	70	M6	10	13
L75148.0002	L75148.TM06X1601	48	15	16	1	12.5	70	M6	16	15
L75148.0003	L75148.TM06X2001	48	15	16	1	12.5	70	M6	20	16
L75148.0014	L75148.TM08X1601	48	15	16	1	12.5	70	M8	16	18
L75148.0016	L75148.TM08X2001	48	15	16	1	12.5	70	M8	20	20

Code	Art.	A	B	H	m	d	LM	d16g	Q	Weight (g)
L75148.0020	L75148.TM08X2501	48	15	16	1	12.5	70	M8	25	21,5
L75148.0021	L75148.TM08X3001	48	15	16	1	12.5	70	M8	30	23
L75148.0023	L75148.TM08X4001	48	15	16	1	12.5	70	M8	40	27

Customised stud length available for a minimum of 150 pieces.

LM = Maximum mouldable length.

Version L751 CIN - stainless steel insert (Aisi 303).

Code	Art.	A	B	H	m	d	LM	d16g	Q	Weight (g)
L75132.0018	L75132.TM06X1101CIN	33	15	16.5	1	12	60	M6	11	11
L75132.0022	L75132.TM06X1601CIN	33	15	16.5	1	12	60	M6	16	13
L75132.0037	L75132.TM06X3001CIN	33	15	16.5	1	12	60	M6	30	17
L75132.0057	L75132.TM08X1601CIN	33	15	16.5	1	12	60	M8	16	15

Threaded stud length on request, with a minimum quantity of 250 pieces.

LM = Maximum mouldable length.