

ASYMMETRICAL FLAT ZAMAK HINGE WITH THREADED STUD

Zamak hinges

Materials:

(1) Die-cast zamak alloy (zinc, aluminium and copper alloy).

Surface finish:

Smooth.

Colour:

(01) Black epoxy powder coated (RAL 9011).

(Z) Standard blue galvanising.

Inserts:

(2) Galvanised steel threaded stud (thread tolerance 6g).


(3) Stainless steel hinge pivot pin (Aisi 304).

Special Requests:

None.



BOTECO
Copyright ©

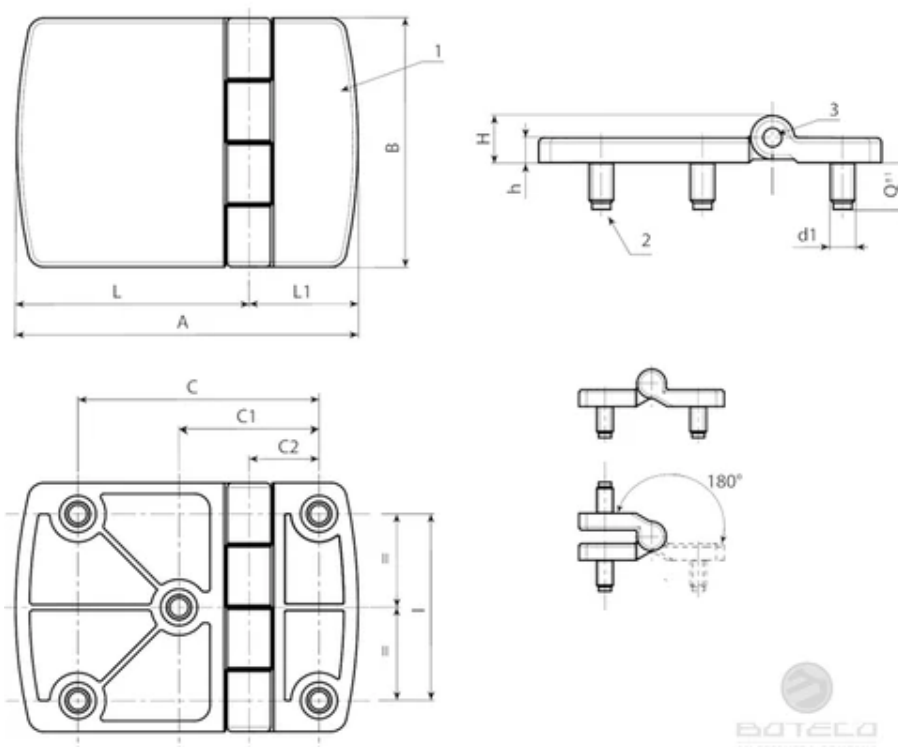

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Black coated version code 01 ending.

Code	Art.	C2	C1	C	I	A	B	L1	L	h	H	d1 6g	Q	Weight (g)
O505077.0001	O505077.ZM08X1401	22,5	45	77,5	60	110	80	35	75	8	15	M8	15	387

Galvanised version code Z ending.

Code	Art.	C2	C1	C	I	A	B	L1	L	h	H	d16g	Q	Weight (g)
O505077.0002	O505077.ZM08X14Z	22,5	45	77,5	60	110	80	35	75	8	15	M8	15	387