

16

MOUNTING FOOT WITH FIXED THREADED STUD

Feet with fixed stem

Materials:

High density polyethylene.

Surface finish:

Satin.

Colour:


Black (RAL 9011).

Inserts:

Galvanised steel threaded stud (thread tolerance 6g).

Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths (minimum quantity 10,000).

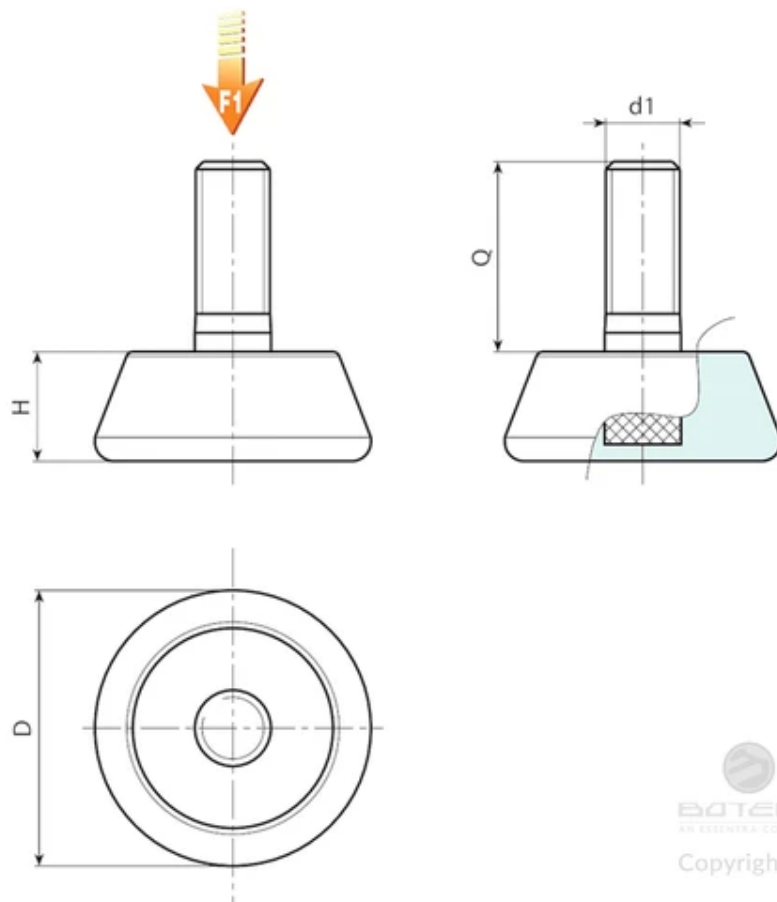

Code	Art.	D	H	d1 6g	Q	Weight (g)	F1 (N)
P20230.0001	P20230.TM08X2001	29	11.5	M8	20	17	1000
P20230.0002	P20230.TM10X2001	29	11.5	M10	20	20	1000
P20240.0001	P20240.TM08X2501	40	13.5	M8	25	29	1000

Code	Art.	D	H	d1 6g	Q	Weight (g)	F1 (N)
P20240.0002	P20240.TM10X2501	40	13.5	M10	25	33	1000
P20250.0001	P20250.TM10X3501	48.5	16.5	M10	35	54	1000
P20250.0002	P20250.TM12X3501	48.5	16.5	M12	35	65	1000
P20260.0001	P20260.TM10X3701	60	18,5	M10	37	78	1000
P20260.0002	P20260.TM12X3701	60	18,5	M12	37	80	1000

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.