

16

## FULL STEEL MOUNTING FOOT WITH ARTICULATED STEM TYPE A - BALL 24 AND NON-SLIP BASE

Metal feet with articulated stem + non-slip base

### Materials:

P544:

Turned free-cutting steel mounting foot base.

P544CIN:

Turned stainless steel mounting foot base (Aisi 303).

### Surface finish:

Smooth.

### Colour:

P544:

Standard blue galvanising.

P544CIN:

Natural.

### Inserts:

P544:

Galvanised steel threaded and articulated stem (ball 24) with hexagonal base (thread tolerance 6g).

P544CIN:

Stainless steel threaded and articulated stem (ball 24) with hexagonal base (Aisi 303) (thread tolerance 6g).

### Stem fixing method:

The stem cannot be disassembled. The ball cannot be removed as the edge of its seat has been pressed in.

### Non-slip base:

Non-slip base in thermoplastic rubber TPV 75 Shore, black RAL 9011.

Resistant to oils and greases. Push-fit assembly.


### Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths.



BOTEC  
Copyright ©

BOTEC  
Copyright ©

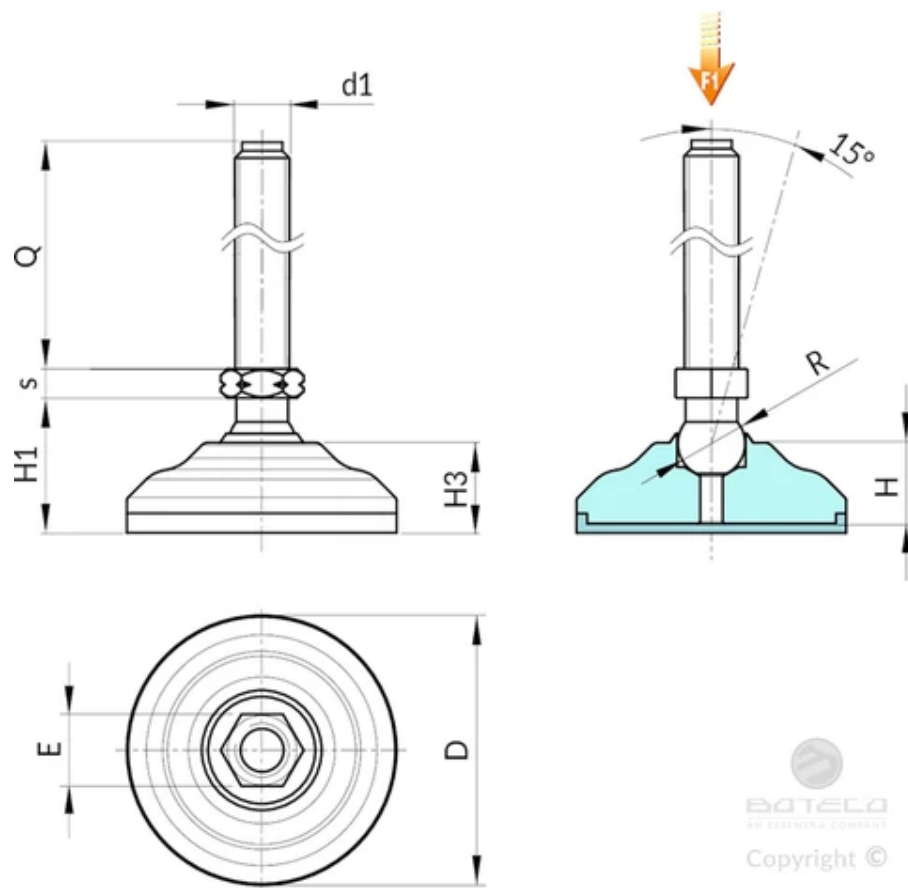

**Version P544: Galvanised steel mounting foot with stem type A (with hexagonal base) and ball 24-with TPV non-slip base**

| Code        | Art.             | D  | H  | H1 | H3   | E  | s  | R  | d1 6g | Q   | Weight (g) | F1 (kN) |
|-------------|------------------|----|----|----|------|----|----|----|-------|-----|------------|---------|
| P54460.0011 | P54460.VZM16X090 | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M16   | 90  | -          | 60      |
| P54460.0012 | P54460.VZM16X110 | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M16   | 110 | -          | 60      |
| P54460.0013 | P54460.VZM16X130 | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M16   | 130 | -          | 60      |
| P54460.0014 | P54460.VZM16X150 | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M16   | 150 | -          | 60      |
| P54460.0015 | P54460.VZM16X170 | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M16   | 170 | -          | 60      |
| P54460.0016 | P54460.VZM20X090 | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M20   | 90  | -          | 90      |
| P54460.0017 | P54460.VZM20X110 | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M20   | 110 | -          | 90      |
| P54460.0018 | P54460.VZM20X130 | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M20   | 130 | -          | 90      |
| P54460.0019 | P54460.VZM20X150 | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M20   | 150 | -          | 90      |
| P54460.0020 | P54460.VZM20X170 | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M20   | 170 | -          | 90      |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 100 pieces.

**Version P544CIN: Stainless steel mounting foot with stem type A (with hexagonal base) and ball 24-with TPV non-slip base**

| Code        | Art.                | D  | H  | H1 | H3   | E  | s  | R  | d1 6g | Q   | Weight (g) | F1_(kN) |
|-------------|---------------------|----|----|----|------|----|----|----|-------|-----|------------|---------|
| P54460.0001 | P54460.INM16X090CIN | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M16   | 90  | -          | 60      |
| P54460.0002 | P54460.INM16X110CIN | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M16   | 110 | -          | 60      |
| P54460.0003 | P54460.INM16X130CIN | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M16   | 130 | -          | 60      |
| P54460.0004 | P54460.INM16X150CIN | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M16   | 150 | -          | 60      |
| P54460.0005 | P54460.INM16X170CIN | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M16   | 170 | -          | 60      |

| Code        | Art.                | D  | H  | H1 | H3   | E  | s  | R  | d1 6g | Q   | Weight (g) | F1_(kN) |
|-------------|---------------------|----|----|----|------|----|----|----|-------|-----|------------|---------|
| P54460.0006 | P54460.INM20X090CIN | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M20   | 90  | -          | 60      |
| P54460.0007 | P54460.INM20X110CIN | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M20   | 110 | -          | 60      |
| P54460.0008 | P54460.INM20X130CIN | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M20   | 130 | -          | 60      |
| P54460.0009 | P54460.INM20X150CIN | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M20   | 150 | -          | 60      |
| P54460.0010 | P54460.INM20X170CIN | 60 | 20 | 32 | 22,5 | 24 | 10 | 24 | M20   | 170 | -          | 60      |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 100 pieces.