

16

## TEARDROP MOUNTING FOOT WITH GROUND FIXING AND STEEL ARTICULATED STEM TYPE B - BALL 12,5 AND NON-SLIP BASE

Teardrop floor-anchor feet - articulated stem + non-slip base

### Materials:

Reinforced polyamide.

Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).

### Inserts:

P705:

Galvanised steel threaded and articulated stem (ball 12.5) with milled seat for wrench (type B) (thread tolerance 6g).

P705CIN:

Stainless steel threaded and articulated stem (ball 12.5) with milled seat for wrench (type B) (Aisi 303) (thread tolerance 6g).

### Non-slip base:

Non-slip base in thermoplastic rubber SBS 75 Shore, black RAL 9011. Resistant to oils and greases. Push-fit assembly.

### Ground fixing:


Through hole obtained by moulding the plastic.

### Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths.

Upon request and for special quantities the foot can be supplied in Orange (RAL 2004).



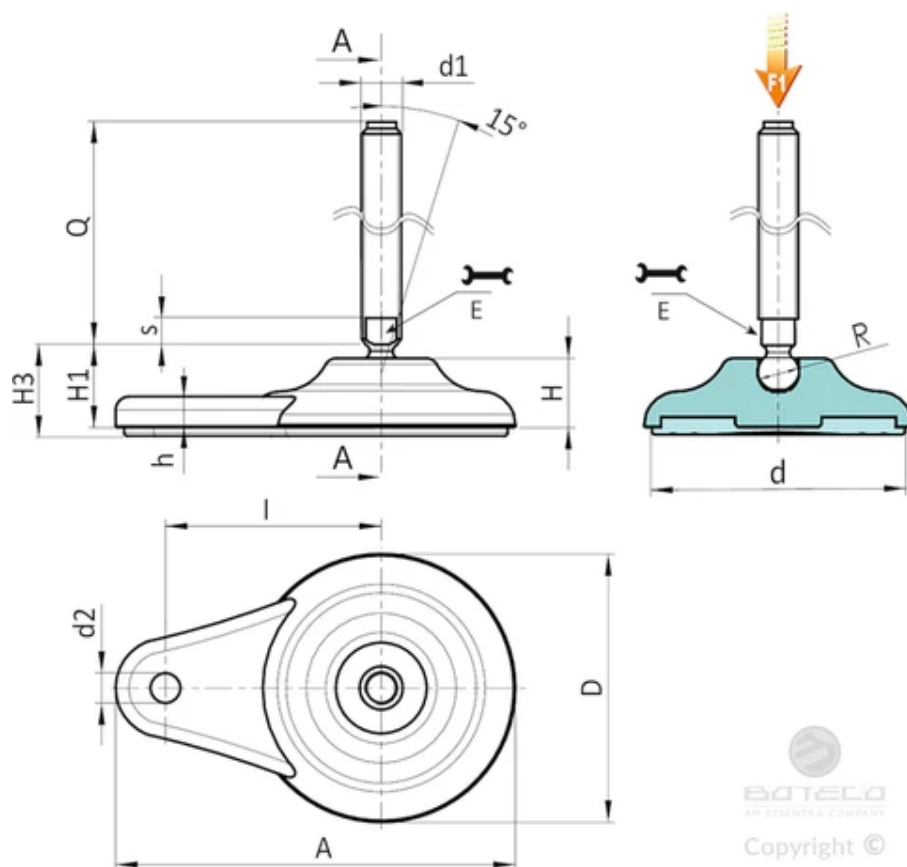

**Version P705: Teardrop mounting foot with ground fixing - stem type B (with milled seat for wrench) and ball 12.5 - with SBS non-slip base**

| Code         | Art.               | D  | H  | I  | H1 | H3 | h | A   | E  | s | d2 | d  | R    | d16g | Q   | Weight (g) | F1 (kN) |
|--------------|--------------------|----|----|----|----|----|---|-----|----|---|----|----|------|------|-----|------------|---------|
| P705080.0001 | P705080.TM16X7001  | 80 | 20 | 65 | 26 | 29 | 9 | 120 | 13 | 7 | 9  | 70 | 12,5 | M16  | 70  | 179        | 10      |
| P705080.0002 | P705080.TM16X9001  | 80 | 20 | 65 | 26 | 29 | 9 | 120 | 13 | 7 | 9  | 70 | 12,5 | M16  | 90  | 205        | 10      |
| P705080.0003 | P705080.TM16X11001 | 80 | 20 | 65 | 26 | 29 | 9 | 120 | 13 | 7 | 9  | 70 | 12,5 | M16  | 110 | 231        | 10      |
| P705080.0005 | P705080.TM16X13001 | 80 | 20 | 65 | 26 | 29 | 9 | 120 | 13 | 7 | 9  | 70 | 12,5 | M16  | 130 | 257        | 10      |
| P705080.0007 | P705080.TM16X15001 | 80 | 20 | 65 | 26 | 29 | 9 | 120 | 13 | 7 | 9  | 70 | 12,5 | M16  | 150 | 283        | 10      |
| P705080.0009 | P705080.TM16X17001 | 80 | 20 | 65 | 26 | 29 | 9 | 120 | 13 | 7 | 9  | 70 | 12,5 | M16  | 170 | 309        | 10      |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 100 pieces.

**Version P705CIN: Teardrop mounting foot with ground fixing - stem type B - stainless steel - (with milled seat for wrench) and ball 12.5 - with SBS non-slip base**

| Code         | Art.                  | D  | H  | I  | H1 | H3 | h | A   | E  | s | d2 | d  | R    | d16g | Q   | Weight (g) | F1 (kN) |
|--------------|-----------------------|----|----|----|----|----|---|-----|----|---|----|----|------|------|-----|------------|---------|
| P705080.0004 | P705080.TM16X11001CIN | 80 | 20 | 65 | 26 | 29 | 9 | 120 | 13 | 7 | 9  | 70 | 12,5 | M16  | 110 | 231        | 10      |
| P705080.0006 | P705080.TM16X13001CIN | 80 | 20 | 65 | 26 | 29 | 9 | 120 | 13 | 7 | 9  | 70 | 12,5 | M16  | 130 | 257        | 10      |
| P705080.0008 | P705080.TM16X15001CIN | 80 | 20 | 65 | 26 | 29 | 9 | 120 | 13 | 7 | 9  | 70 | 12,5 | M16  | 150 | 283        | 10      |
| P705080.0010 | P705080.TM16X17001CIN | 80 | 20 | 65 | 26 | 29 | 9 | 120 | 13 | 7 | 9  | 70 | 12,5 | M16  | 170 | 309        | 10      |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 100 pieces.