


P900



16

SMALL MOUNTING FOOT WITH STEEL ARTICULATED STEM TYPE A - BALL 12,5

Plastic feet - articulated stem

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

P900:

Galvanised steel threaded and articulated stem (ball 12.5) with hexagonal base (thread tolerance 6g).

P900CIN:


Stainless steel threaded and articulated stem (ball 12.5) with hexagonal base (Aisi 303) (thread tolerance 6g).

Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths.

Upon request and for special quantities the foot can be supplied in Orange (RAL 2004).



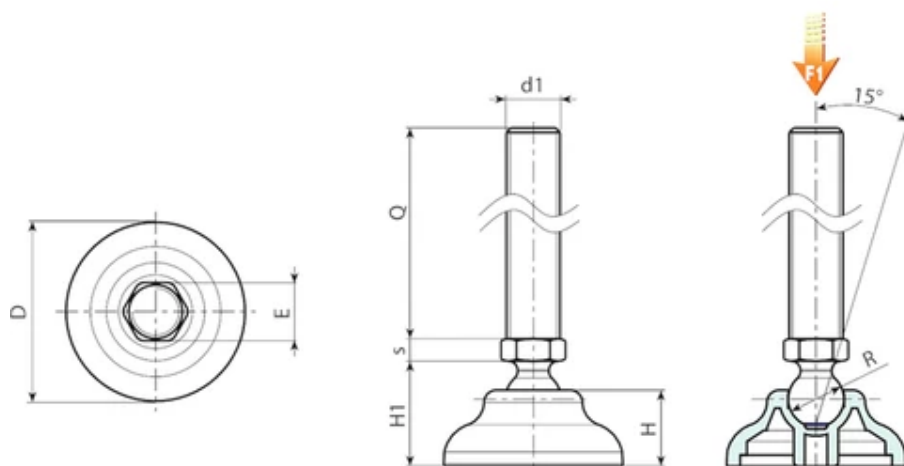


 BATECO
 AN ESSENTIA COMPANY
 Copyright ©

Version P900: Mounting foot with stem type A (with hexagonal base) and ball 12,5

Code	Art.	D	H	H1	E	s	R	d1 6g	Q	Weight (g)	F1 (kN)
P90040.0003	P90040.TM08X4501	40	17	23	13	5	12,5	M8	45	40	10
P90040.0005	P90040.TM08X7001	40	17	23	13	5	12,5	M8	70	47	10
P90040.0025	P90040.TM08X9001	40	17	23	13	5	12,5	M8	90	54	10
P90040.0013	P90040.TM10X4501	40	17	23	13	5	12,5	M10	45	48	10
P90040.0015	P90040.TM10X7001	40	17	23	13	5	12,5	M10	70	60	10
P90040.0007	P90040.TM10X10001	40	17	23	13	5	12,5	M10	100	75	10
P90040.0021	P90040.TM12X4501	40	17	23	13	5	12,5	M12	45	58	10
P90040.0023	P90040.TM12X7001	40	17	23	13	5	12,5	M12	70	75	10
P90040.0018	P90040.TM12X10001	40	17	23	13	5	12,5	M12	100	97	10
P90050.0002	P90050.TM08X4501	50	18	24	13	5	12,5	M8	45	46	10
P90050.0003	P90050.TM08X7001	50	18	24	13	5	12,5	M8	70	53	10
P90050.0011	P90050.TM10X4501	50	18	24	13	5	12,5	M10	45	54	10
P90050.0014	P90050.TM10X7001	50	18	24	13	5	12,5	M10	70	63	10
P90050.0006	P90050.TM10X10001	50	18	24	13	5	12,5	M10	100	77	10
P90050.0019	P90050.TM12X4501	50	18	24	13	5	12,5	M12	45	64	10
P90050.0021	P90050.TM12X7001	50	18	24	13	5	12,5	M12	70	78	10
P90050.0016	P90050.TM12X10001	50	18	24	13	5	12,5	M12	100	99	10
P90060.0004	P90060.TM08X4501	60	20	26	13	5	12,5	M8	45	58	10
P90060.0005	P90060.TM08X7001	60	20	26	13	5	12,5	M8	70	66	10
P90060.0010	P90060.TM10X4501	60	20	26	13	5	12,5	M10	45	68	10
P90060.0013	P90060.TM10X7001	60	20	26	13	5	12,5	M10	70	80	10

Code	Art.	D	H	H1	E	s	R	d1 6g	Q	Weight (g)	F1 (kN)
P90060.0006	P90060.TM10X10001	60	20	26	13	5	12,5	M10	100	95	10
P90060.0022	P90060.TM12X4501	60	20	26	13	5	12,5	M12	45	78	10
P90060.0023	P90060.TM12X7001	60	20	26	13	5	12,5	M12	70	96	10
P90060.0018	P90060.TM12X10001	60	20	26	13	5	12,5	M12	100	117	10

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.
Customised stud length available for a minimum of 100 pieces.

Version P900CIN: Mounting foot with stem type A (with hexagonal base) and ball 12,5 - stainless steel

Code	Art.	D	H	H1	E	s	R	d1 6g	Q	Weight (g)	F1 (kN)
P90040.0004	P90040.TM08X4501CIN	40	17	23	13	5	12,5	M8	45	40	10
P90040.0006	P90040.TM08X7001CIN	40	17	23	13	5	12,5	M8	70	47	10
P90040.0014	P90040.TM10X4501CIN	40	17	23	13	5	12,5	M10	45	48	10
P90040.0016	P90040.TM10X7001CIN	40	17	23	13	5	12,5	M10	70	60	10
P90040.0022	P90040.TM12X4501CIN	40	17	23	13	5	12,5	M12	45	58	10
P90040.0024	P90040.TM12X7001CIN	40	17	23	13	5	12,5	M12	70	75	10
P90040.0019	P90040.TM12X10001CIN	40	17	23	13	5	12,5	M12	100	99	10
P90050.0001	P90050.TM08X4501CIN	50	18	24	13	5	12,5	M8	45	46	10
P90050.0004	P90050.TM08X7001CIN	50	18	24	13	5	12,5	M8	70	53	10
P90050.0005	P90050.TM10X4501CIN	50	18	24	13	5	12,5	M10	45	54	10
P90050.0015	P90050.TM10X7001CIN	50	18	24	13	5	12,5	M10	70	63	10
P90050.0020	P90050.TM12X4501CIN	50	18	24	13	5	12,5	M12	45	64	10
P90050.0022	P90050.TM12X7001CIN	50	18	24	13	5	12,5	M12	70	78	10
P90050.0017	P90050.TM12X10001CIN	50	18	24	13	5	12,5	M12	100	102	10
P90060.0001	P90060.TM08X4501CIN	60	20	26	13	5	12,5	M8	45	58	10
P90060.0002	P90060.TM08X7001CIN	60	20	26	13	5	12,5	M8	70	66	10
P90060.0011	P90060.TM10X4501CIN	60	20	26	13	5	12,5	M10	45	68	10
P90060.0014	P90060.TM10X7001CIN	60	20	26	13	5	12,5	M10	70	80	10
P90060.0016	P90060.TM12X4501CIN	60	20	26	13	5	12,5	M12	45	78	10
P90060.0017	P90060.TM12X7001CIN	60	20	26	13	5	12,5	M12	70	96	10
P90060.0019	P90060.TM12X10001CIN	60	20	26	13	5	12,5	M12	100	120	10

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.
Customised stud length available for a minimum of 100 pieces.