

16

## MOUNTING FOOT WITH GROUND FIXING AND STEEL ARTICULATED STEM TYPE B - BALL 12,5

Plastic feet with floor-anchoring - articulated stem

### Materials:

Reinforced polyamide. Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).

### Inserts:

P912:

Galvanised steel threaded and articulated stem (ball 12.5) with milled seat for wrench (type B) (thread tolerance 6g).

P912CIN:

Stainless steel threaded and articulated stem (ball 12.5) with milled seat for wrench (type B) (Aisi 303) (thread tolerance 6g).

### Ground fixing:


The mounting foot is supplied with closed holes for anchoring to the ground. To open them pierce the plastic membrane (see drawing).

### Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths.

Upon request and for special quantities the foot can be supplied in Orange (RAL 2004).



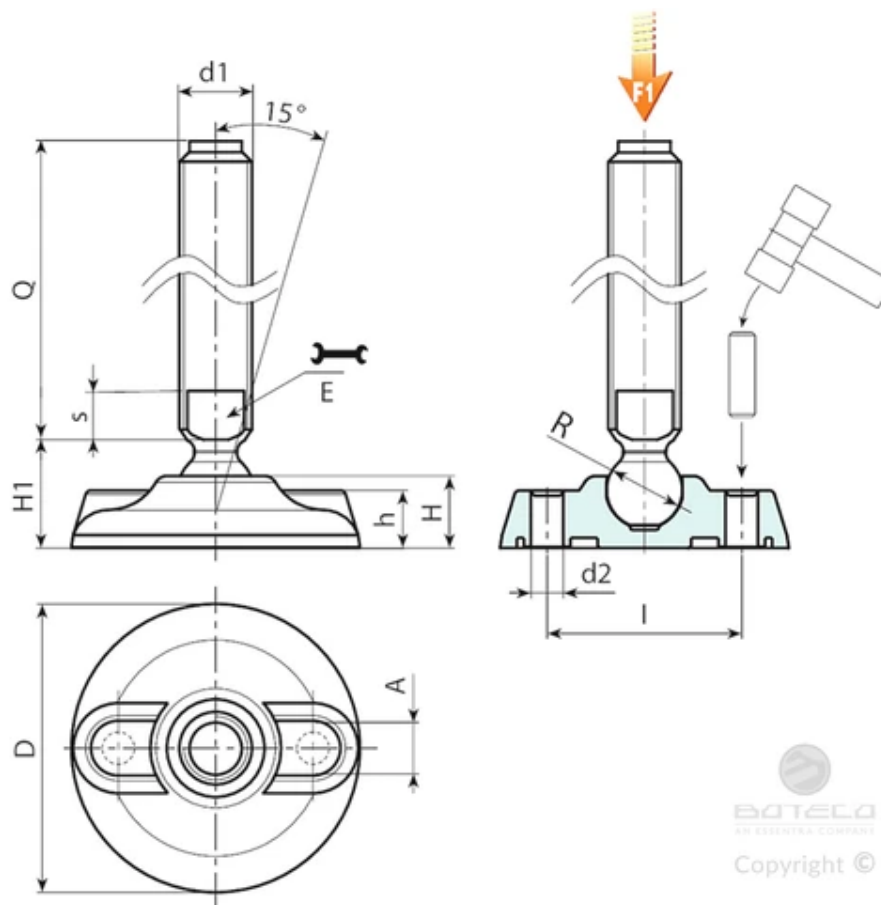

**Version P912: Mounting foot with stem type B (with milled seat for wrench) and ball 12,5**

| Code         | Art.               | D  | H  | I  | H1   | h  | A  | E  | s | d2 | R    | d16g | Q   | Weight (g) | F1 (kN) |
|--------------|--------------------|----|----|----|------|----|----|----|---|----|------|------|-----|------------|---------|
| P912080.0011 | P912080.TM16X7001  | 80 | 20 | 54 | 25.5 | 16 | 20 | 13 | 7 | 9  | 12.5 | M16  | 70  | 146        | 10      |
| P912080.0012 | P912080.TM16X9001  | 80 | 20 | 54 | 25.5 | 16 | 20 | 13 | 7 | 9  | 12.5 | M16  | 90  | 172        | 10      |
| P912080.0001 | P912080.TM16X11001 | 80 | 20 | 54 | 25.5 | 16 | 20 | 13 | 7 | 9  | 12.5 | M16  | 110 | 198        | 10      |
| P912080.0003 | P912080.TM16X13001 | 80 | 20 | 54 | 25.5 | 16 | 20 | 13 | 7 | 9  | 12.5 | M16  | 130 | 224        | 10      |
| P912080.0005 | P912080.TM16X15001 | 80 | 20 | 54 | 25.5 | 16 | 20 | 13 | 7 | 9  | 12.5 | M16  | 150 | 250        | 10      |
| P912080.0008 | P912080.TM16X17001 | 80 | 20 | 54 | 25.5 | 16 | 20 | 13 | 7 | 9  | 12.5 | M16  | 170 | 276        | 10      |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 100 pieces.

**Version P912CIN: Mounting foot with stem type B - stainless steel - (with milled seat for wrench) and ball 12,5**

| Code         | Art.                  | D  | H  | I  | H1   | h  | A  | E  | s | d2 | R    | d16g | Q   | Weight (g) | F1 (kN) |
|--------------|-----------------------|----|----|----|------|----|----|----|---|----|------|------|-----|------------|---------|
| P912080.0002 | P912080.TM16X11001CIN | 80 | 20 | 54 | 25.5 | 16 | 20 | 13 | 7 | 9  | 12.5 | M16  | 110 | 198        | 10      |
| P912080.0004 | P912080.TM16X13001CIN | 80 | 20 | 54 | 25.5 | 16 | 20 | 13 | 7 | 9  | 12.5 | M16  | 130 | 224        | 10      |
| P912080.0007 | P912080.TM16X15001CIN | 80 | 20 | 54 | 25.5 | 16 | 20 | 13 | 7 | 9  | 12.5 | M16  | 150 | 250        | 10      |
| P912080.0009 | P912080.TM16X17001CIN | 80 | 20 | 54 | 25.5 | 16 | 20 | 13 | 7 | 9  | 12.5 | M16  | 170 | 276        | 10      |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 100 pieces.