

16

GALVANISED STEEL THREADED STEM TYPE B - WITH MILLED SEAT FOR WRENCH - TURNED

Threaded stems

Materials:

Free-cutting steel (39SMnPb36). !da duplicazione!

Surface finish:

Smooth.

Colour:

Blue galvanising.


Thread:

Turned stem with milled seat for wrench (type B) with rolled thread (thread tolerance 6g).

Special requests:

Upon request and for special quantities the length and geometry of the inserts can be supplied to customer's drawing.



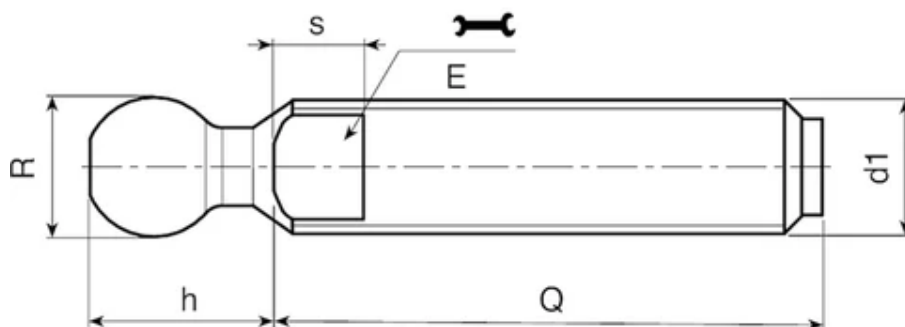

Version M16 with ball 12,5

Code	Art.	E	h	s	R ±0,1	d1 6g	Q	Weight (g)
PEPVZTM16X70Z3	PEPVZTM16X70Z3	13	15	7	12,5	M16	70	98
PEPVZTM16X90Z3	PEPVZTM16X90Z3	13	15	7	12,5	M16	90	124
PEPVZTM16X110Z3	PEPVZTM16X110Z3	13	15	7	12,5	M16	110	150
PEPVZTM16X130Z3	PEPVZTM16X130Z3	13	15	7	12,5	M16	130	176
PEPVZTM16X150Z3	PEPVZTM16X150Z3	13	15	7	12,5	M16	150	202
PEPVZTM16X170Z3	PEPVZTM16X170Z3	13	15	7	12,5	M16	170	228

These stems are compatible with the following foot bases: • PIE.040S12,5 • PIE.050S12,5 • PIE.060S12,5 • PIE.080S12,5 • PIE.700080S125

Customised stud length available for a minimum of 100 pieces.

Version M20-M24 with ball 15

Code	Art.	E	h	s	R	d1 6g	Q	Weight (g)
PEPVZTM20X50Z3	PEPVZTM20X50Z3	16	17	7	15	M20	50	142
PEPVZTM20X70Z3	PEPVZTM20X70Z3	16	17	7	15	M20	70	174
PEPVZTM20X90Z3	PEPVZTM20X90Z3	16	17	7	15	M20	90	206
PEPVZTM20X110Z3	PEPVZTM20X110Z3	16	17	7	15	M20	110	238
PEPVZTM20X130Z3	PEPVZTM20X130Z3	16	17	7	15	M20	130	270
PEPVZTM20X150Z3	PEPVZTM20X150Z3	16	17	7	15	M20	150	305
PEPVZTM20X170Z3	PEPVZTM20X170Z3	16	17	7	15	M20	170	337
PEPVZTM20X190Z3	PEPVZTM20X190Z3	16	17	7	15	M20	190	370

Code	Art.	E	h	s	R	d16g	Q	Weight (g)
PEP.VZTM20X210Z3	PEP.VZTM20X210Z3	16	17	7	15	M20	210	405
PEP.VZTM24X150Z3	PEP.VZTM24X150Z3	19	17	8	15	M24	150	510
PEP.VZTM24X170Z3	PEP.VZTM24X170Z3	19	17	8	15	M24	170	570
PEP.VZTM24X190Z3	PEP.VZTM24X190Z3	19	17	8	15	M24	190	630
PEP.VZTM24X210Z3	PEP.VZTM24X210Z3	19	17	8	15	M24	210	690

These stems are compatible with the following foot bases: • PIE.060S15 • PIE.080S15 • PIE.105S15 • PIE.130S15 • PIE.700080S15
Customised stud length available for a minimum of 100 pieces.

Version M24-M30 with ball 24

Code	Art.	E	h	s	R	d16g	Q	Weight (g)
PEP.VZTM24X110Z5	PEP.VZTM24X110Z5	19	27	10	24	M24	110	390
PEP.VZTM24X130Z5	PEP.VZTM24X130Z5	19	27	10	24	M24	130	450
PEP.VZTM24X150Z5	PEP.VZTM24X150Z5	19	27	10	24	M24	150	510
PEP.VZTM24X170Z5	PEP.VZTM24X170Z5	19	27	10	24	M24	170	570
PEP.VZTM30X110Z5	PEP.VZTM30X110Z5	27	27	11	24	M30	110	550
PEP.VZTM30X130Z5	PEP.VZTM30X130Z5	27	27	11	24	M30	130	637
PEP.VZTM30X150Z5	PEP.VZTM30X150Z5	27	27	11	24	M30	150	725
PEP.VZTM30X170Z5	PEP.VZTM30X170Z5	27	27	11	24	M30	170	813
PEP.VZTM30X190Z5	PEP.VZTM30X190Z5	27	27	11	24	M30	190	900
PEP.VZTM30X210Z5	PEP.VZTM30X210Z5	27	27	11	24	M30	210	990

These stems are compatible with the following foot bases: • PIE.080S24 • PIE.105S24 • PIE.130S24 • PIE.700080S24
Customised stud length available for a minimum of 100 pieces.