

FERRITE ROUND DISC MAGNET WITH STEEL SHELL AND THREADED THROUGH HOLE

Ferrite magnets

Materials:

- (1) Turned free-cutting steel shell with threaded through hole (thread tolerance 6H).
- (2) Flat ferrite magnet.
- (3) Plastic spacer.

Surface finish:


Smooth.

Colour:

Standard blue galvanising.

Special requests:

Upon request and for special quantities the steel shell of model T410M can be supplied black galvanised (720h salt spray resistance).

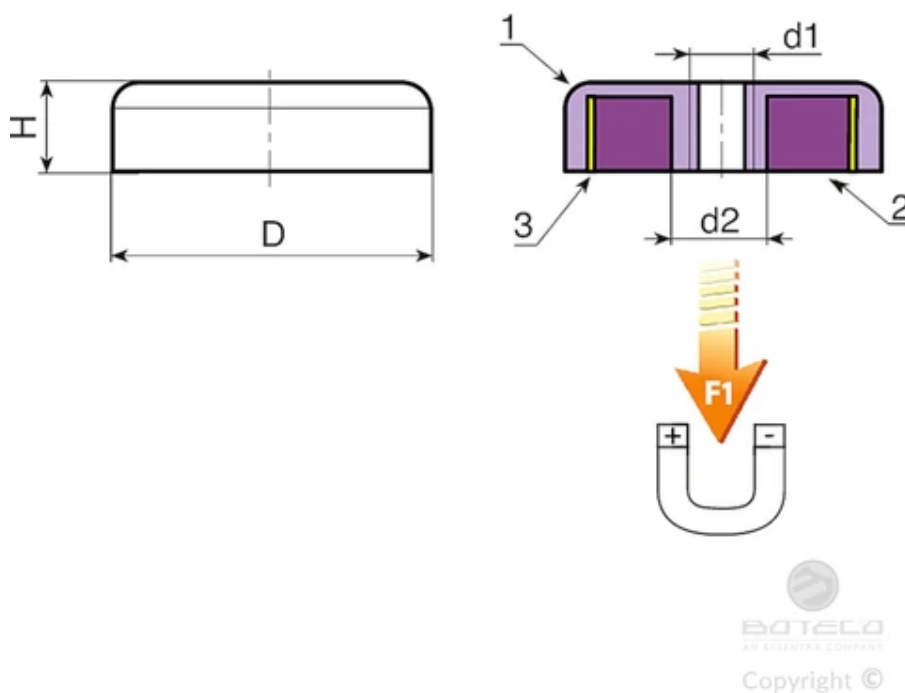

Code	art.	D	H +0,5/-0,2	d2	d1 6H	Weight (g)	F1 (N)
T410025.0003	T410025.VZM04	25 ±0,1	7	5,2	M4	18	36
T410032.0003	T410032.VZM04	32 ±0,1	7	5,2	M4	29	75

Code	art.	D	H +0,5/-0,2	d2	d1 6H	Weight (g)	F1 (N)
T410040.0003	T410040.VZM04	40 +0,2/ -0,1	8	5,2	M4	53	90
T410050.0003	T410050.VZM06	50 +0,2/ -0,1	10	12	M6	94	170
T410050.0004	T410050.VZM08	50 +0,2/ -0,1	10	12	M8	94	170
T410063.0003	T410063.VZM08	63 +0,3/ -0,1	14	13	M8	206	290
T410080.0002	T410080.VZM08	80 +0,3/ -0,1	18	14,5	M8	472	550
T410080.0003	T410080.VZM10	80 +0,3/ -0,1	18	14,5	M10	466	550