

20

ALUMINIUM TANK PLUG WITH MAGNET

Caps

Materials:

- (1) Aluminium plug (alloy 6060).
- (4) Neodymium magnet -NdFeB- (N35SH) resistant up to 120°C.
- (2) Pad-printed "MAGNETIC" writing, resistant up to 120°C.
- (3) NBR rubber gasket.

Surface finish:

Turned.

Colour:

Natural.



Special requests:

Upon request and for special quantities pad-printings can be supplied to customer's drawing.

Upon request and for special quantities thread d1 can be supplied to customer's drawing.



BOTELLO
AN ESSENTIA COMPANY
Copyright ©

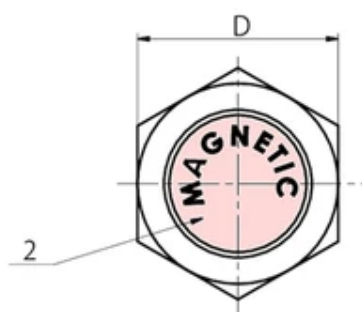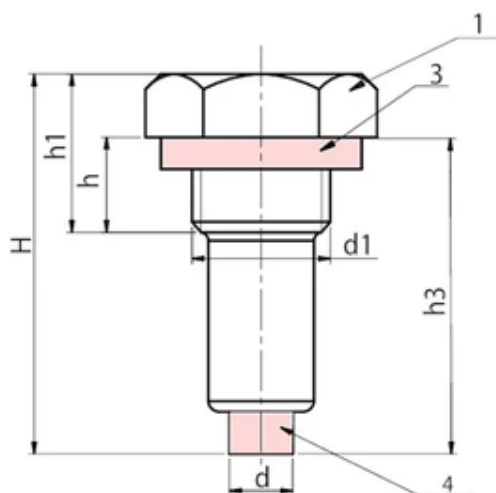

BOTELLO
AN ESSENTIA COMPANY
Copyright ©

Version with GAS threads

Code	art.	D	d	H	h	h1	h3	d1 (GAS)	Weight (g)
T50019.0001	T50019.AT1-4	19	6	36	9	15	28	1/4	14

Code	art.	D	d	H	h	h1	h3	d1 (GAS)	Weight (g)
T50022.0001	T50022.AT3-8	22	8	36	9	15	30	3/8	21
T50026.0001	T50026.AT1-2	26	8	40	11	18	34	1/2	-
T50032.0001	T50032.AT3-4	32	8	44	12	20	36	3/4	-

Version with metric fine pitch

Code	art.	D	d	H	h	h1	h3	d1	Weight (g)
T50022.0009	T50022.AB16X1.5	22	8	36	9	15	30	M16X1,5	21
T50026.0008	T50026.AB20X1.5	26	8	40	11	18	34	M20X1,5	-
T50032.0008	T50032.AB27X1.5	32	8	44	12	20	36	M27X1,5	-