

## KNOB WITH SHORT STEEL INDEXING PLUNGER

Fine pitch indexing plungers - with knob

### Materials:

(4) Reinforced polyamide lobed knob. Cannot be disassembled.  
Resistant to oils and greases.

(5) Central cap in polyamide. Resistant to oils and greases.

W780:

(3) Galvanised steel spring.

(2) Threaded high-resistance steel hexagon ring nut.

(1) Hardened high resistance steel plunger pin.

(6) Galvanised steel knob fixing screw (ISO 7046).

W780CIN:

(3) Stainless steel spring (Aisi 301).

(2) Threaded stainless steel hexagon ring nut (Aisi 303).

(1) Stainless steel plunger pin (Aisi 303).

(6) Galvanised steel knob fixing screw (ISO 7046).

### Surface finish:

(4-5) Satin.

(1-2-3) Smooth.

### Colour:

(4) Black (RAL 9011).

(5) Grey (RAL 7035).

W780:

(1-2) Black-oxide treated.

W780CIN:

(1-2) Natural.


### ATTENTION:

> We recommend an H7 tolerance for the plunger stem bore.

### Special Requests:

On request and for special quantities the knob can be supplied in the colours indicated in the table.



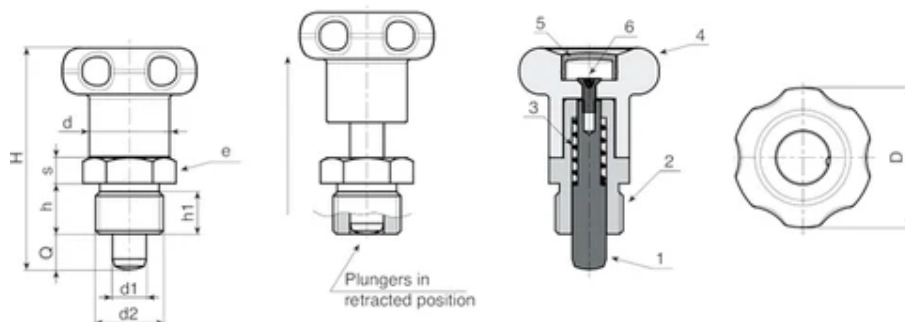

#### Version W780 - black-oxide treated steel

| Code      | Art.       | D  | H  | h  | h1 | d2      | d  | e  | s | d1 -0,02 -0,04 | Q | Weight (g) |
|-----------|------------|----|----|----|----|---------|----|----|---|----------------|---|------------|
| W780.0003 | W780.Q0601 | 27 | 43 | 10 | 8  | M12x1,5 | 14 | 17 | 5 | 6              | 6 | 31         |
| W780.0004 | W780.Q0801 | 33 | 52 | 12 | 10 | M16x1,5 | 19 | 19 | 6 | 8              | 8 | 57         |

#### Version W780 CIN - stainless steel (Aisi 303)

| Code      | Art.          | D  | H  | h  | h1 | d2      | d  | e  | s | d1 -0,02 -0,04 | Q | Weight (g) |
|-----------|---------------|----|----|----|----|---------|----|----|---|----------------|---|------------|
| W780.0001 | W780.I0601CIN | 27 | 43 | 10 | 8  | M12x1,5 | 14 | 17 | 5 | 6              | 6 | 31         |
| W780.0002 | W780.I0801CIN | 33 | 52 | 12 | 10 | M16x1,5 | 19 | 19 | 6 | 8              | 8 | 57         |