

03

SOLID CONTROL HANDWHEEL WITH REVOLVING HANDLE M145

Handwheels with revolving handle

Materials:

Reinforced and stabilized polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Alternative cap colours:

Orange	(RAL 2004 code 02).
Blue	(RAL 5015 code 07).
Yellow	(RAL 1021 code 10).
Red	(RAL 3000 code 16).
Green	(RAL 6024 code 17).
Black	(RAL 9011 code 01).

Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

Lateral insert:

Brass insert with threaded through hole.

Lateral handle:

Revolving handle art. M145.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special requests:


On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.

Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.



Upon request and for special quantities handwheels, handles and caps are available in the colours indicated in the chart (attention: reduced range).

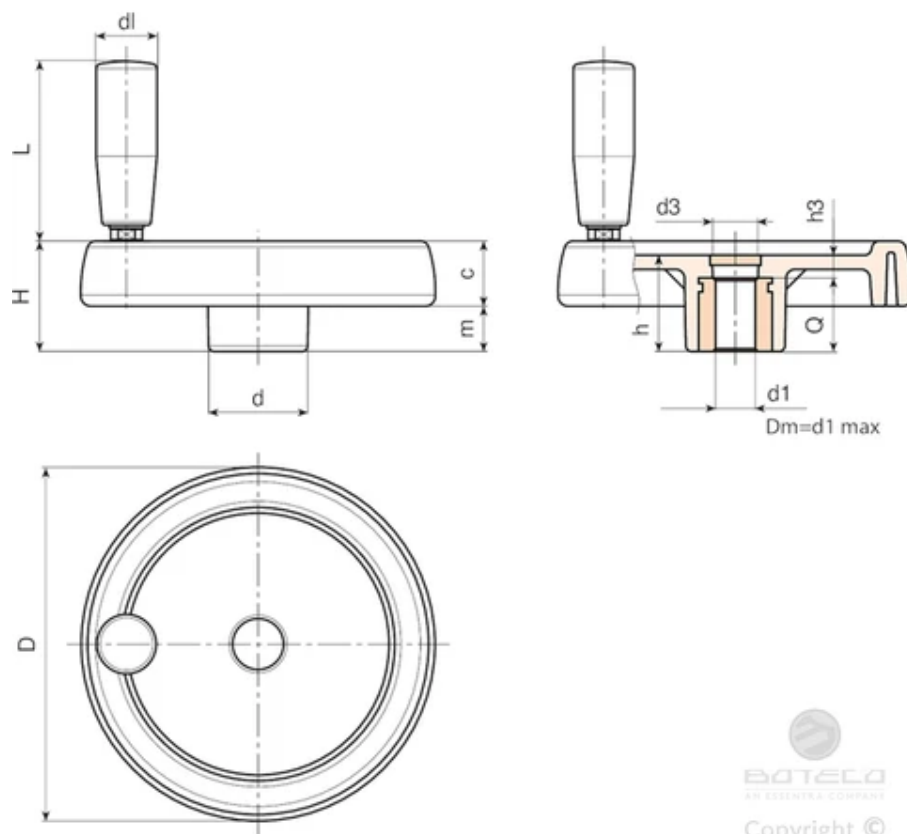

BOTELO
AN ESSINTIA COMPANY
Copyright ©

Code	Art.	D	H	h	d	m	c	d3	h3	dl	L	Dm	d1 H10	Q	Weight (g)
C193080.0001	C193080.TP0501P	81	33	29	25	16	17	16	9	20	55	12	5	20	135
C193100.0002	C193100.TP0501P	100.5	39	34	30.5	18	21	16	10	20	55	16	5	24	220
C193125.0004	C193125.TP0501P	125	44	37	36	20	24	26	13	23	66	18	5	24	370
C193150.0001	C193150.TD0801P	150	54	44	38	25	29	26	12	25	76	22	8	32	594
C193175.0001	C193175.TD0801P	173	57	47	40	25.5	31.5	26	15	25	87	22	8	32	750
C193200.0001	C193200.TD0801P	204	61	49.5	45	26	35	27	13	27	96	28	8	36	965
C193250.0001	C193250.TD0801P	251	66,5	56,5	60	27,5	39	36	20,5	27	96	28	8	36	1500

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

03

SOLID CONTROL HANDWHEEL WITH REVOLVING HANDLE M129

Handwheels with revolving handle

Materials:

Reinforced and stabilized polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Alternative cap colours:

Orange (RAL 2004 code 02).
Blue (RAL 5015 code 07).
Yellow (RAL 1021 code 10).
Red (RAL 3000 code 16).
Green (RAL 6024 code 17).
Black (RAL 9011 code 01).

Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

Lateral insert:

Brass insert with threaded through hole.

Lateral handle:

Revolving handle art. M129.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special requests:


On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.

Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.



Upon request and for special quantities handwheels, handles and caps are available in the colours indicated in the chart (attention: reduced range).

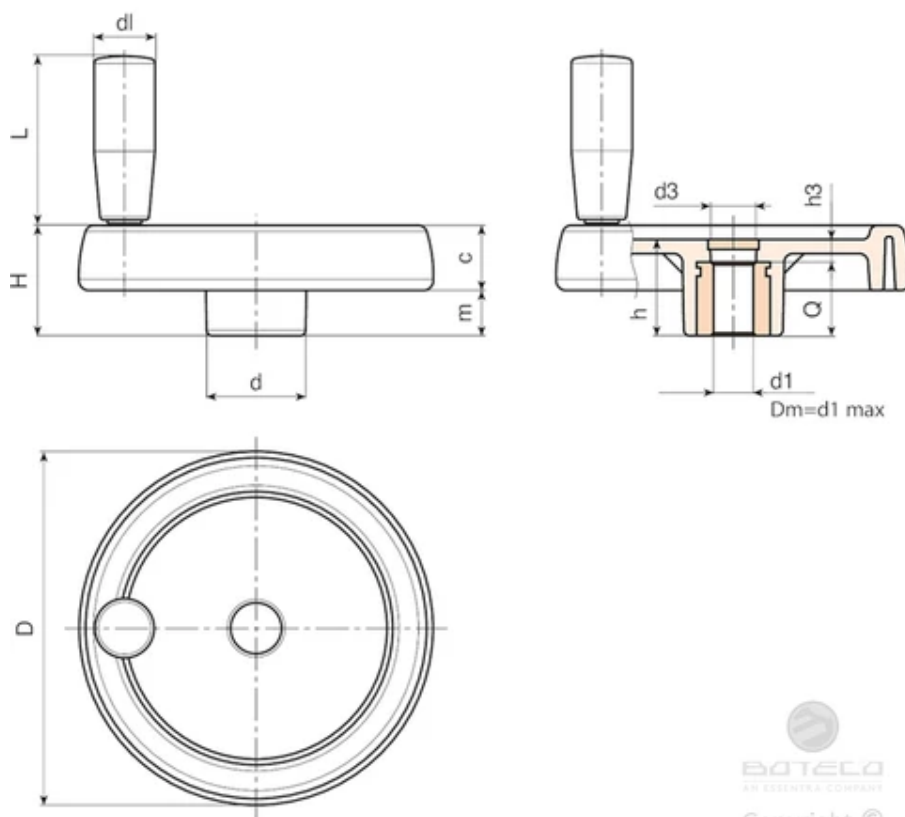

BOTELO
BY ESSENTA COMPANY
Copyright ©

Code	Art.	D	H	h	d	m	c	d3	h3	dl	L	Dm	d1 H10	Q	Weight (g)
C194080.0007	C194080.TP0501P	81	33	29	25	16	17	16	9	20	52	12	5	20	145
C194100.0007	C194100.TP0501P	100.5	39	34	30.5	18	21	16.5	10	20	52	16	5	24	235
C194125.0003	C194125.TP0501P	125	44	37	36	20	24	26	13	23	62	18	5	24	350
C194150.0001	C194150.TD0801P	150	54	44	38	25	29	26	12	25	72	22	8	32	610
C194175.0004	C194175.TD0801P	173	57	47	40	25.5	31.5	26	15	25	81	22	8	32	755
C194200.0008	C194200.TD0801P	204	61	49.5	45	26	35	27	13	27	93	28	8	36	975
C194250.0001	C194250.TD0801P	251	66,5	56,5	60	27,5	39	36	20,5	27	93	28	8	36	1520

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

03

SOLID CONTROL HANDWHEEL WITH REVOLVING HANDLE M202

Handwheels with revolving handle

Materials:

Reinforced and stabilized polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Alternative cap colours:

Orange	(RAL 2004 code 02).
Blue	(RAL 5015 code 07).
Yellow	(RAL 1021 code 10).
Red	(RAL 3000 code 16).
Green	(RAL 6024 code 17).
Black	(RAL 9011 code 01).

Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

Lateral insert:

Brass insert with threaded through hole.

Lateral handle:

Revolving handle art. M202.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special requests:


On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.

Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.



Upon request and for special quantities handwheels, handles and caps are available in the colours indicated in the chart (attention: reduced range).

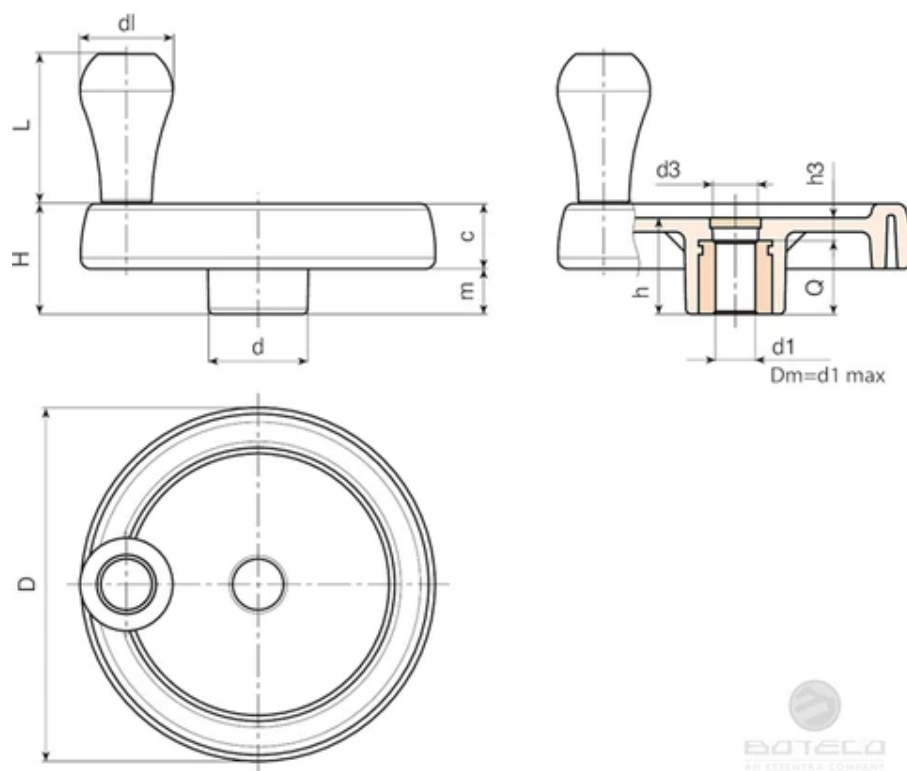

BATELO
BY ESENTIA COMPANY
Copyright ©

Code	Art.	D	H	h	d	m	c	d3	h3	dl	L	Dm	d1 H10	Q	Weight (g)
C195150.0001	C195150.TD0801P	150	54	44	38	25	29	26	12	40	64	22	8	32	610
C195175.0001	C195175.TD0801P	173	57	47	40	25.5	31.5	26	15	40	64	22	8	32	750
C195200.0001	C195200.TD0801P	204	61	49.5	45	26	35	27	13	40	64	28	8	36	960
C195250.0001	C195250.TD0801P	251	66,5	56,5	60	27,5	39	36	20,5	40	64	28	8	36	1490

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

03 SOLID CONTROL HANDWHEEL

Volantino dalla forma classica, rotondo con doppia corona piena e con mozzo robusto. Caratteristiche che conferiscono al prodotto una struttura massiccia e resistente. Progettato in tal modo per avere un certo effetto volano e quindi facilitare la rotazione dell'asse su cui è montato. Ideale per sostituire i classici volantini di bakelite ed i più pesanti volantini di alluminio, ma con il vantaggio di essere più conveniente degli altri. Versione senza manico per contenere costi ed ingombri, dove le operazioni di rotazione non sono frequenti. Il foro dell'inserto ha un piccolo diametro pilota, ma BOTECA è in grado, anche su piccoli lotti, di personalizzare tale foro e adeguarlo alle esigenze del cliente. A chiusura di tale foro troviamo un comodo tappo asportabile, disponibile in diversi colori e facile da personalizzare mediante tampografia. Prodotto adatto per macchine utensili manuali, trapani, foratrici, macchine per imballaggio, seghe e seghetti, macchine per confezionamento, attrezzature alimentari. Il volante di manovra pieno senza manico C196 è fatto con materiali a base di poliammide rinforzata con additivi stabilizzanti, per garantire una ottima planarità e circolarità. Questo modello è una versione base, ma può essere richiesto con diversi modelli di manici girevoli, pieghevoli, (volantino pieno con manico pieghevole, volante a disco pieno, volante pieno con manico ad incasso, volante in metallo, ecc.).

Materials:

Reinforced and stabilized polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).



Alternative cap colours:

Orange	(RAL 2004 code 02).
Blue	(RAL 5015 code 07).
Yellow	(RAL 1021 code 10).
Red	(RAL 3000 code 16).
Green	(RAL 6024 code 17).
Black	(RAL 9011 code 01).

Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.


Special requests:

On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.

Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.

Upon request and for special quantities handwheels and caps are available in the colours indicated in the chart (attention: reduced range).

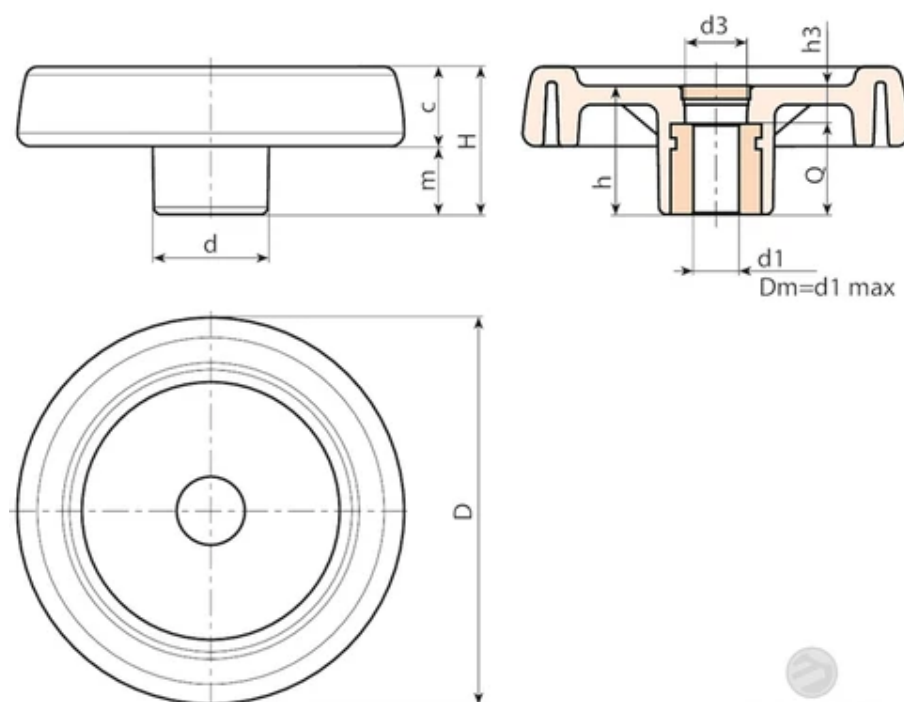


BATECO
BY INVENTIA COMPANY
Copyright ©

Code	Art.	D	H	h	d	m	c	d3	h3	Dm	d1 H10	Q	Weight (g)
C196080.0012	C196080.TP0501P	81	33	29	25	16	17	16	9	12	5	20	100
C196080.0001	C196080.TD0801P	81	33	29	25	16	17	16	9	12	8	20	99
C196080.0005	C196080.TD1001P	81	33	29	25	16	17	16	9	12	10	20	99
C196080.0010	C196080.TD1201P	81	33	29	25	16	17	16	9	12	12	20	98
C196100.0018	C196100.TP0501P	100	39	34	30	18.5	20.5	16	10	16	5	24	192
C196100.0019	C196100.TD0801P	100	39	34	30	18.5	20.5	16	10	16	8	24	190
C196100.0003	C196100.TD1001P	100	39	34	30	18.5	20.5	16	10	16	10	24	187
C196100.0004	C196100.TD1201P	100	39	34	30	18.5	20.5	16	10	16	12	24	185
C196125.0013	C196125.TP0501P	125	44	37	36	20	24	26	13	18	5	24	295
C196125.0004	C196125.TD1201P	125	44	37	36	20	24	26	13	18	12	24	290
C196150.0001	C196150.TD0801P	150	54	44	38	25	29	26	12	22	8	32	520
C196150.0005	C196150.TD1401P	150	54	44	38	25	29	26	12	22	14	32	515
C196175.0002	C196175.TD0801P	173	57	47	40	25.5	31.5	26	15	22	8	32	660
C196200.0001	C196200.TD0801P	202.5	60.5	49.5	45	26	34.5	26.5	13.5	28	8	36	870
C196250.0002	C196250.TD0801P	251	66,5	56,5	60	27,5	39	36	20,5	28	8	36	1420

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

03

SOLID CONTROL HANDWHEEL WITH REVOLVING HANDLE

Handwheels with revolving handle

Materials:

Reinforced and stabilized polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Alternative cap colours:

Orange	(RAL 2004 code 02).
Blue	(RAL 5015 code 07).
Yellow	(RAL 1021 code 10).
Red	(RAL 3000 code 16).
Green	(RAL 6024 code 17).
Black	(RAL 9011 code 01).

Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

Lateral insert:

Brass insert with threaded through hole.

Lateral handle:

Revolving handle art. M144.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special requests:


On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.

Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.

Upon request and for special quantities handwheels, handles and caps are available in the colours indicated in the chart (attention: reduced range).



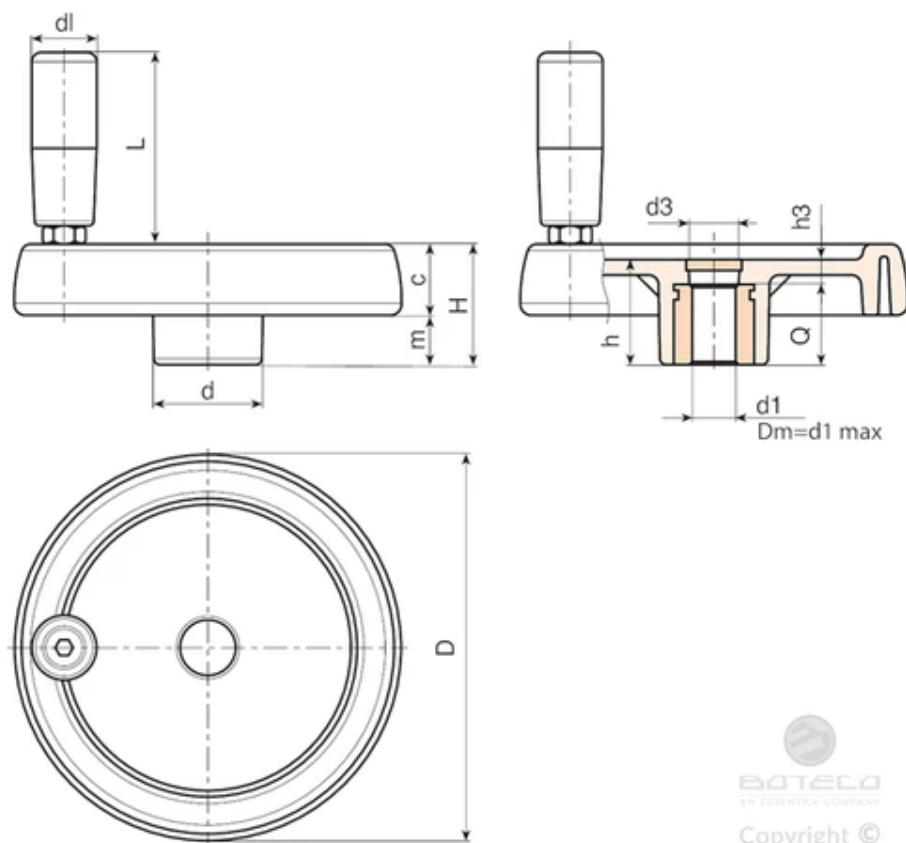

Code	Art.	D	H	h	d	m	c	d3	h3	dl	L	Dm	d1 H10	Q	Weight (g)
C197080.0007	C197080.TP0501P	81	33	29	25	16	17	16	9	20	56	12	5	20	130
C197080.0001	C197080.TD0801P	81	33	29	25	16	17	16	9	20	56	12	8	20	129
C197080.0003	C197080.TD1001P	81	33	29	25	16	17	16	9	20	56	12	10	20	127
C197100.0021	C197100.TP0501P	100.5	39	34	30.5	18	21	16.5	10	20	56	16	5	24	192
C197100.0001	C197100.TD0801P	100.5	39	34	30.5	18	21	16.5	10	20	56	16	8	24	192
C197100.0008	C197100.TD1001P	100.5	39	34	30.5	18	21	16.5	10	20	56	16	10	24	190
C197100.0014	C197100.TD1201P	100.5	39	34	30.5	18	21	16.5	10	20	56	16	12	24	188
C197125.0031	C197125.TP0501P	125	44	37	36	20	24	26	13	22	65	18	5	24	351
C197125.0002	C197125.TD0801P	125	44	37	36	20	24	26	13	22	65	18	8	24	345
C197125.0008	C197125.TD1201P	125	44	37	36	20	24	26	13	22	65	18	12	24	340
C197125.0013	C197125.TD1401P	125	44	37	36	20	24	26	13	22	65	18	14	24	335
C197125.0020	C197125.TD1501P	125	44	37	36	20	24	26	13	22	65	18	15	24	342
C197150.0001	C197150.TD0801P	150	54	44	38	25	29	26	12	23	76	22	8	32	588
C197150.0008	C197150.TD1201P	150	54	44	38	25	29	26	12	23	76	22	12	32	580
C197150.0010	C197150.TD1401P	150	54	44	38	25	29	26	12	23	76	22	14	32	577
C197150.0017	C197150.TD1601P	150	54	44	38	25	29	26	12	23	76	22	16	32	570
C197175.0001	C197175.TD0801P	173	57	47	40	25.5	31.5	26	15	25	86	22	8	32	770
C197175.0007	C197175.TD1601P	173	57	47	40	25.5	31.5	26	15	25	86	22	16	32	755
C197175.0009	C197175.TD2001P	173	57	47	40	25.5	31.5	26	15	25	86	22	20	32	751
C197200.0004	C197200.TD0801P	204	61	49.5	45	26	35	26.5	13.5	25	86	28	8	36	980
C197200.0019	C197200.TD2001P	204	61	49.5	45	26	35	26.5	13.5	25	86	28	20	36	960
C197250.0001	C197250.TD0801P	251	66,5	56,5	60	27,5	39	36	20,5	25	86	28	8	36	1530

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

03

SOLID CONTROL HANDWHEEL WITH REVOLVING FOLDING HANDLE

Handwheels with folding handle

Materials:

Reinforced and stabilized polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Alternative cap colours:

Orange	(RAL 2004 code 02).
Blue	(RAL 5015 code 07).
Yellow	(RAL 1021 code 10).
Red	(RAL 3000 code 16).
Green	(RAL 6024 code 17).
Black	(RAL 9011 code 01).

Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

Lateral insert:

Brass insert with threaded through hole.

Lateral handle:

Revolving, folding handle art. M136.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special requests:

On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.


Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.



BOTECO
Copyright ©

Upon request and for special quantities handwheels, handles and caps are available in the colours indicated in the chart (attention: reduced range).

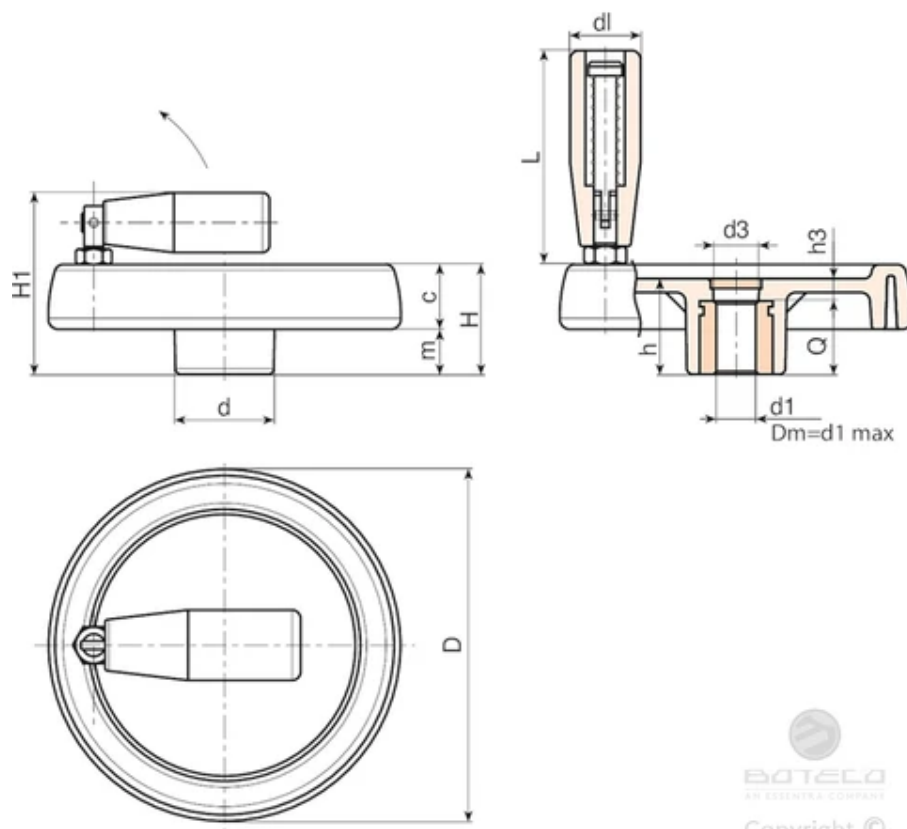

BATECO
SIN. INVENTORI & COMPANY
Copyright ©

Code	Art.	D	H	H1	h	d	m	c	d3	h3	dl	L	Dm	d1	H10	Q	Weight (g)
C198080.0007	C198080.TP0501P	81	33	57	29	25	16	17	16	9	20	56	12	5	20	145	
C198080.0001	C198080.TD0801P	81	33	57	29	25	16	17	16	9	20	56	12	8	20	144	
C198080.0002	C198080.TD1001P	81	33	57	29	25	16	17	16	9	20	56	12	10	20	143	
C198080.0003	C198080.TD1201P	81	33	57	29	25	16	17	16	9	20	56	12	12	20	143	
C198100.0011	C198100.TP0501P	100.5	39	63	34	30.5	18	21	16.5	10	20	56	16	5	24	235	
C198100.0004	C198100.TD1001P	100.5	39	63	34	30.5	18	21	16.5	10	20	56	16	10	24	233	
C198100.0005	C198100.TD1201P	100.5	39	63	34	30.5	18	21	16.5	10	20	56	16	12	24	232	
C198125.0013	C198125.TP0501P	125	44	74	37	36	20	24	26	13	25	76	18	5	24	360	
C198125.0003	C198125.TD1201P	125	44	74	37	36	20	24	26	13	25	76	18	12	24	355	
C198125.0005	C198125.TD1401P	125	44	74	37	36	20	24	26	13	25	76	18	14	24	353	
C198125.0014	C198125.TD1501P	125	44	74	37	36	20	24	26	13	25	76	18	15	24	352	
C198150.0002	C198150.TD0801P	150	54	89	44	38	25	29	26	12	26	89	22	8	32	670	
C198150.0005	C198150.TD1201P	150	54	89	44	38	25	29	26	12	26	89	22	12	32	665	
C198150.0009	C198150.TD1401P	150	54	89	44	38	25	29	26	12	26	89	22	14	32	663	
C198150.0013	C198150.TD1801P	150	54	89	44	38	25	29	26	12	26	89	22	18	32	655	
C198175.0001	C198175.TD0801P	173	57	92	47	40	25.5	31.5	26	15	26	97	22	8	32	810	
C198175.0012	C198175.TD1601P	173	57	92	47	40	25.5	31.5	26	15	26	97	22	16	32	800	
C198175.0016	C198175.TD2001P	173	57	92	47	40	25.5	31.5	26	15	26	97	22	20	32	797	
C198200.0002	C198200.TD0801P	204	61	94	49.5	45	26	35	26.5	13.5	26	97	28	8	36	1030	
C198200.0004	C198200.TD1401P	204	61	94	49.5	45	26	35	26.5	13.5	26	97	28	14	36	1020	

Code	Art.	D	H	H1	h	d	m	c	d3	h3	dl	L	Dm	d1 H10	Q	Weight (g)
C198200.0006	C198200.TD1801P	204	61	94	49,5	45	26	35	26,5	13,5	26	97	28	18	36	1018
C198200.0008	C198200.TD2001P	204	61	94	49,5	45	26	35	26,5	13,5	26	97	28	20	36	1015
C198250.0001	C198250.TD0801P	251	66,5	100	56,5	60	27,5	39	36	20,5	26	97	28	8	36	1580

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

03

SOLID CONTROL HANDWHEEL WITH FOLDAWAY REVOLVING HANDLE

Handwheels with folding handle

Materials:

Reinforced and stabilized polyamide. Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Alternative cap colours:

Orange	(RAL 2004 code 02).
Blue	(RAL 5015 code 07).
Yellow	(RAL 1021 code 10).
Red	(RAL 3000 code 16).
Green	(RAL 6024 code 17).
Black	(RAL 9011 code 01).

Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

Lateral handle:

Revolving handle that folds into the handwheel, with hexagonal connection.

Reinforced polyamide handle. Black-oxide treated internal mechanism. Fixed with black-oxide treated hexagon socket button head screw ISO 7838.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special requests:

On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.


Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.



BOTECO
Copyright ©

Upon request and for special quantities handwheels, handles and caps are available in the colours indicated in the chart (attention: reduced range).

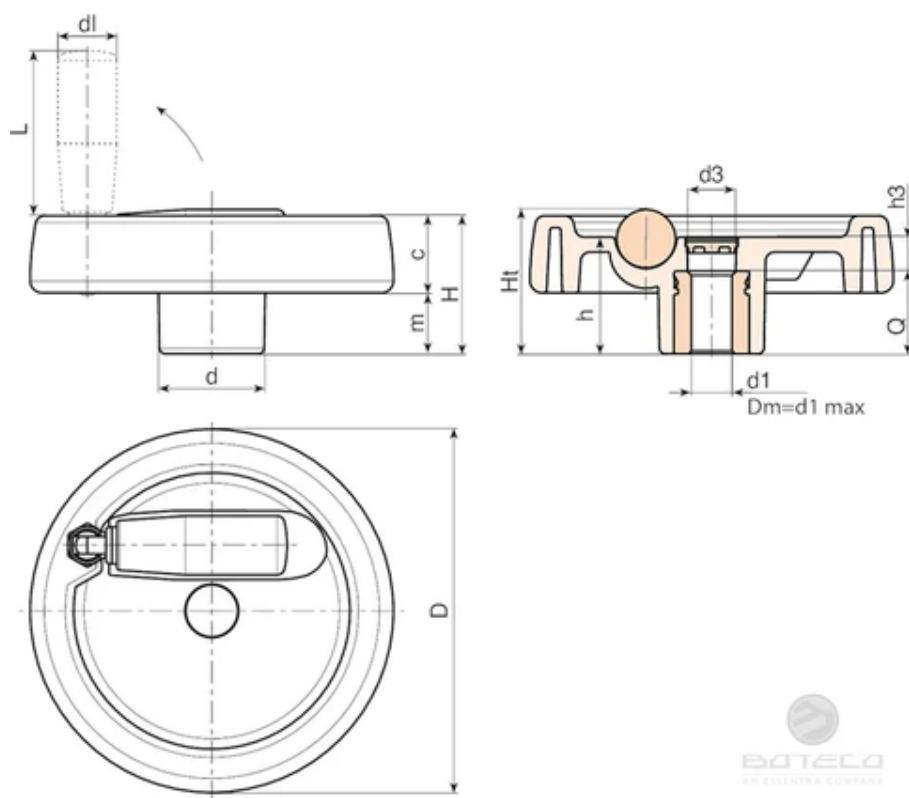

Code	Art.	D	H	Ht	h	d	m	c	d3	h3	dl	L	Dm	d1 H10	Q	Weight (g)
C199125.0024	C199125.TP0501P	124	48	49.5	40	36	21.5	26.5	15	16	20	38	18	5	24	349
C199125.0001	C199125.TD0801P	124	48	49.5	40	36	21.5	26.5	15	16	20	38	18	8	24	346
C199125.0010	C199125.TD1201P	124	48	49.5	40	36	21.5	26.5	15	16	20	38	18	12	24	345
C199125.0014	C199125.TD1401P	124	48	49.5	40	36	21.5	26.5	15	16	20	38	18	14	24	340
C199150.0001	C199150.TD0801P	149	53	-	44	38	24.5	28.5	26	12	20	58	22	8	32	500
C199150.0013	C199150.TD1401P	149	53	-	44	38	24.5	28.5	26	12	20	58	22	14	32	493
C199150.0018	C199150.TD1601P	149	53	-	44	38	24.5	28.5	26	12	20	58	22	16	32	490
C199150.0020	C199150.TD2001P	149	53	-	44	38	24.5	28.5	26	12	20	58	22	20	32	488
C199175.0002	C199175.TD0801P	174	58	-	48	40	24.5	33.5	26	16	26	80	28	8	32	715
C199175.0014	C199175.TD1601P	174	58	-	48	40	24.5	33.5	26	16	26	80	28	16	32	707
C199175.0020	C199175.TD2001P	174	58	-	48	40	24.5	33.5	26	16	26	80	28	20	32	695
C199200.0001	C199200.TD0801P	198	63	-	53	44	24.5	38.5	26	17	27	90	28	8	36	1015
C199200.0009	C199200.TD2001P	198	63	-	53	44	24.5	38.5	26	17	27	90	28	20	36	990
C199250.0001	C199250.TD0801P	250	67	-	58	60	29	38	36	22	27	90	28	8	36	1500

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

03

SOLID CONTROL HANDWHEEL WITH CENTRAL FOLDAWAY REVOLVING HANDLE

Handwheels with folding handle

Materials:

Reinforced and stabilized polyamide. Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Alternative cap colours:

Orange	(RAL 2004 code 02).
Blue	(RAL 5015 code 07).
Yellow	(RAL 1021 code 10).
Red	(RAL 3000 code 16).
Green	(RAL 6024 code 17).
Black	(RAL 9011 code 01).

Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

Lateral handle:

Revolving handle that folds into the handwheel, with hexagonal connection.

Reinforced polyamide handle. Black-oxide treated internal mechanism. Fixed with black-oxide treated hexagon socket button head screw ISO 7838.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special requests:

On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.


Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.



BOTECO
SISTEMI A MANO
Copyright ©

Upon request and for special quantities handwheels, handles and caps are available in the colours indicated in the chart (attention: reduced range).

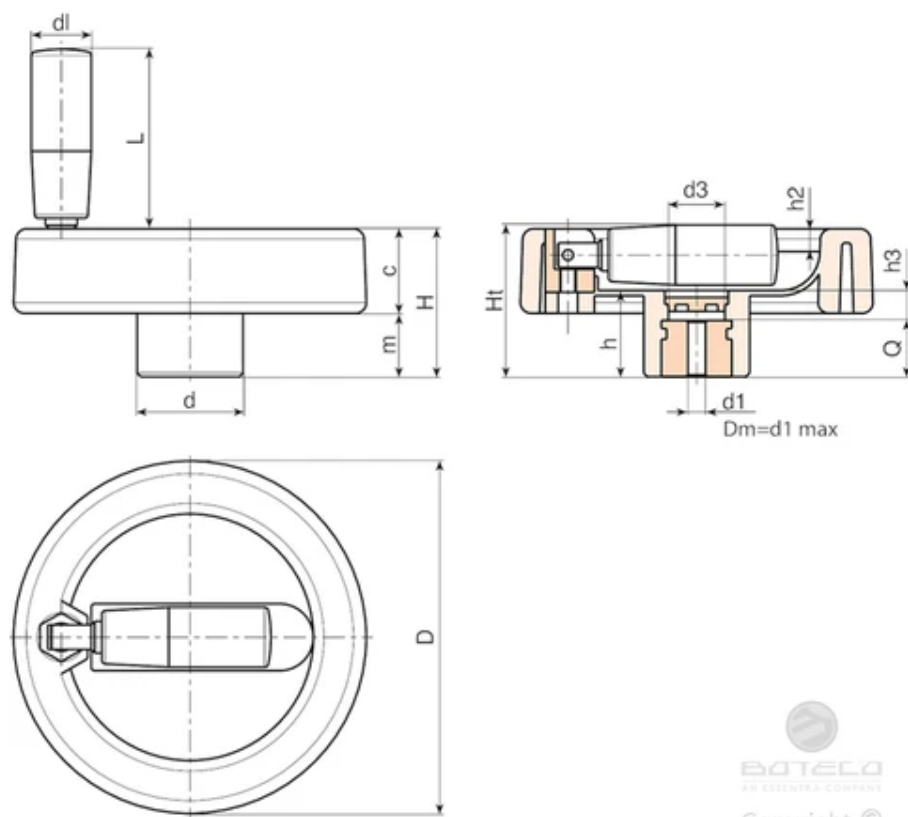

Code	Art.	D	H	Ht	h	d	m	c	d3	h3	h2	dl	L	Dm	d1 H10	Q	Weight (g)
C199080.0018	C199080.TP0501P	80	33	35	19	25	15	18	15	6	4	16	38	12	5	13	113
C199080.0004	C199080.TD0801P	80	33	35	19	25	15	18	15	6	4	16	38	12	8	13	111
C199080.0011	C199080.TD1001P	80	33	35	19	25	15	18	15	6	4	16	38	12	10	13	110
C199100.0019	C199100.TP0501P	100	42	43.5	24	30	18	24	17	8	6.5	17	48	16	5	16	240
C199100.0001	C199100.TD0801P	100	42	43.5	24	30	18	24	17	8	6.5	17	48	16	8	16	238
C199100.0004	C199100.TD1001P	100	42	43.5	24	30	18	24	17	8	6.5	17	48	16	10	16	237
C199100.0010	C199100.TD1201P	100	42	43.5	24	30	18	24	17	8	6.5	17	48	16	12	16	232
C199100.0011	C199100.TD1401P	100	42	43.5	24	30	18	24	17	8	6.5	17	48	16	14	16	230

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

03

ALUMINIUM CONTROL HANDWHEEL WITH SMOOTH BORE

Metalline - Control handwheels

Materials:

Aluminium.

Surface finish:

Satin finish, except for the sections (T) with low surface roughness obtained by turning.

Colour:

Natural.

Hole:

Smooth through hole, remachined with H7 tolerance.

Fixing method:


For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special Requests:

Upon request and for special quantities handwheels can be supplied on customer's drawing with hole diameter d1.



BOTECO
AN ESSENTIA COMPANY
Copyright ©

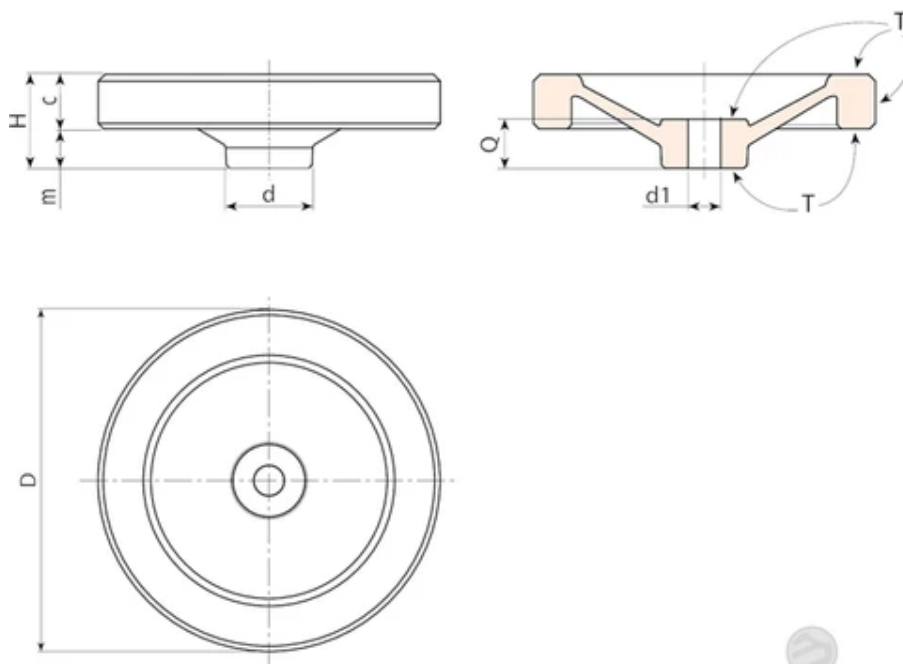

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	Art.	d	D	H	m	c	Q	d1 H7	Weight (g)
C496080.0001	C496080.AD10	26	80,5	28,5	14	14,5	16	10	141
C496100.0001	C496100.AD10	30,5	101	33	15	18	17	10	255
C496125.0001	C496125.AD12	31,5	125,5	34,5	14,5	20	18	12	395
C496160.0001	C496160.AD15	42	161	40	19,5	20,5	20	15	682
C496200.0001	C496200.AD18	51,5	201	45	24,5	20,5	24	18	1036

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H7).

C497



03

ALUMINIUM CONTROL HANDWHEEL WITH SMOOTH BORE AND REVOLVING HANDLE

Metalline - Control handwheels

Materials:

Aluminium.

Surface finish:

Satin finish, except for the sections (T) with low surface roughness obtained by turning.

Colour:

Natural.

Lateral handle:

Revolving handle art. M129.

Hole:

Smooth through hole, remachined with H7 tolerance.


Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special Requests:

Upon request and for special quantities handwheels can be supplied on customer's drawing with hole diameter d1.



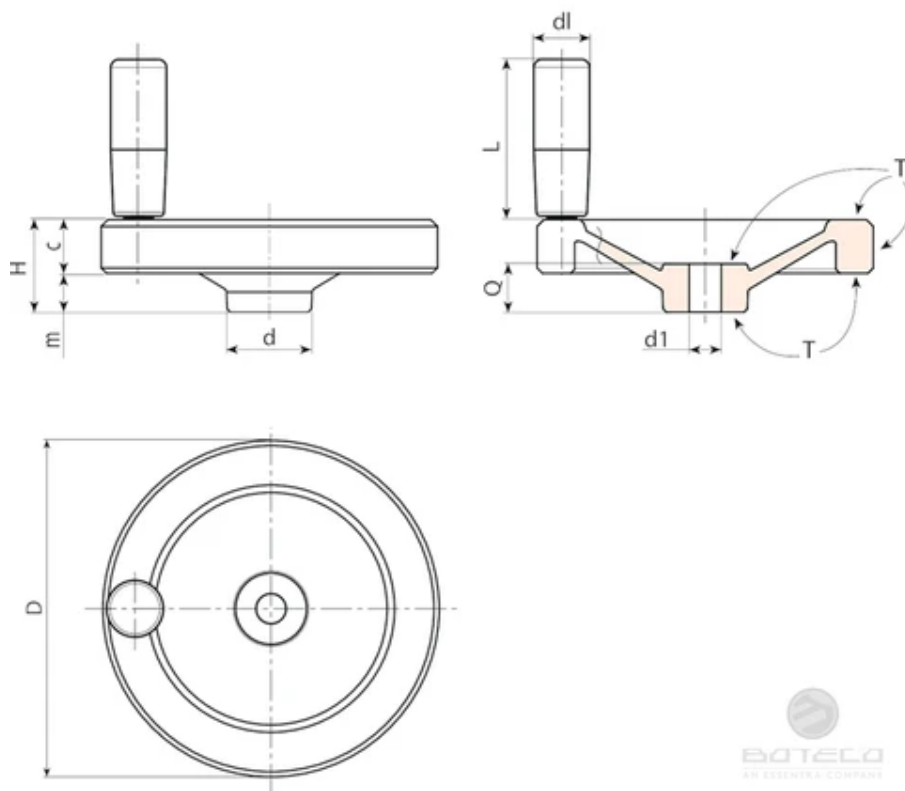

Code	Art.	d	D	H	m	c	Q	d1 H7	dl	L	Weight (g)
C476080.0001	C497080.AD08	26	80,5	28,5	14	14,5	16	10	20	52	178
C476100.0001	C497100.AD10	30,5	101	33	15	18	17	10	20	52	292
C497125.0001	C497125.AD12	31,5	125,5	34,5	14,5	20	18	12	23,5	62,5	453
C497160.0001	C497160.AD15	42	161	40	19,5	20,5	20	15	25	72	746
C4972000.0001	C497200.AD18	51,5	201	45	24,5	20,5	24	18	26	81,5	1155

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H7).

C498



03

ALUMINIUM CONTROL HANDWHEEL WITH SMOOTH BORE AND REVOLVING FOLDING HANDLE

Metalline - Control handwheels

Materials:

Aluminium.

Surface finish:

Satin finish, except for the sections (T) with low surface roughness obtained by turning.

Colour:

Natural.

Lateral handle:

Revolving, folding handle art. M136.

Hole:

Smooth through hole, remachined with H7 tolerance.

Fixing method:


For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special Requests:

Upon request and for special quantities handwheels can be supplied on customer's drawing with hole diameter d1.



BOTEC
Copyright ©

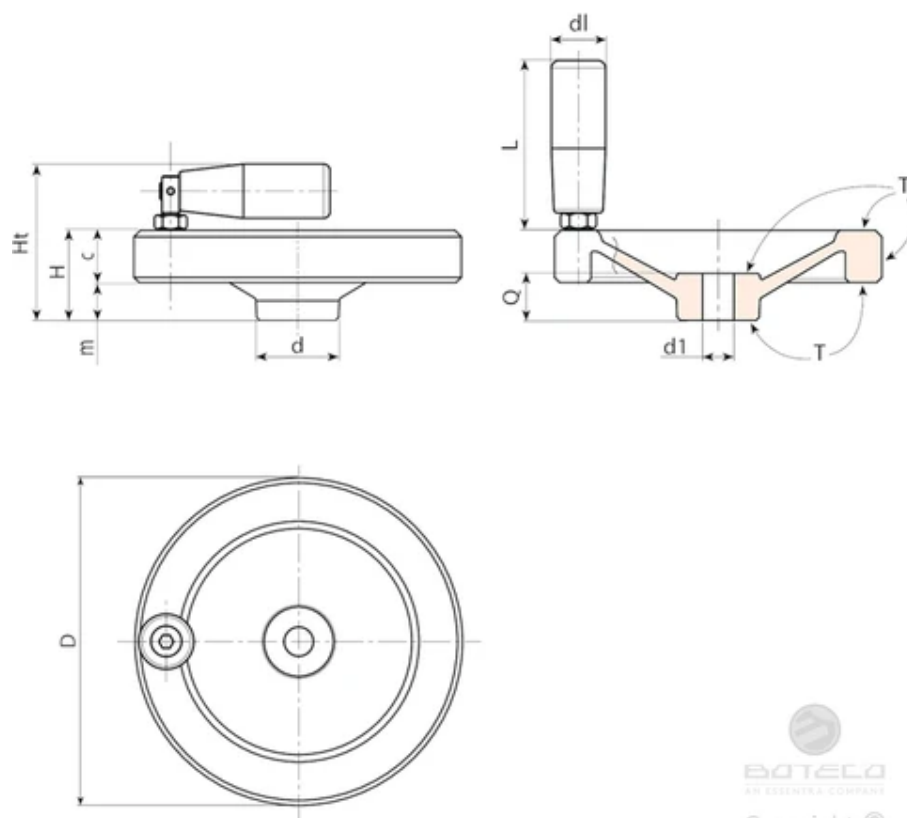

Code	Art.	d	D	H	m	c	Q	d1 H7	Ht	dl	L	Weight (g)
C498080.0001	C498080.AD08	26	80,5	28,5	14	14,5	16	10	52,5	19,5	55	171
C498100.0001	C498100.AD10	30,5	101	33	15	18	17	10	57	19,5	55	285
C498125.0001	C498125.AD12	31,5	125,5	34,5	14,5	20	18	12	63,5	23,5	75,5	451
C498160.0001	C498160.AD15	42	161	40	19,5	20,5	20	15	69	23,5	75,5	738
C498200.0001	C498200.AD18	51,5	201	45	24,5	20,5	24	18	80	26	89	1164

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H7).

03

SOLID CONTROL HANDWHEEL WITH REVOLVING HANDLE AND LOCKING KNOB

Handwheels with revolving handle

Materials:

Reinforced and stabilized polyamide. Resistant to oils and greases.

Surface finish:

Satin.

Handwheel and handle colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

Lateral insert:

Brass insert with threaded through hole.

Lateral handle:

Revolving handle art. M144.

Locking knob:

Black cylindrical knob Ral 9011 art. G793-36 (Ø 100 art. G732-25) with threaded stud.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.


Special requests:

On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.

Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.



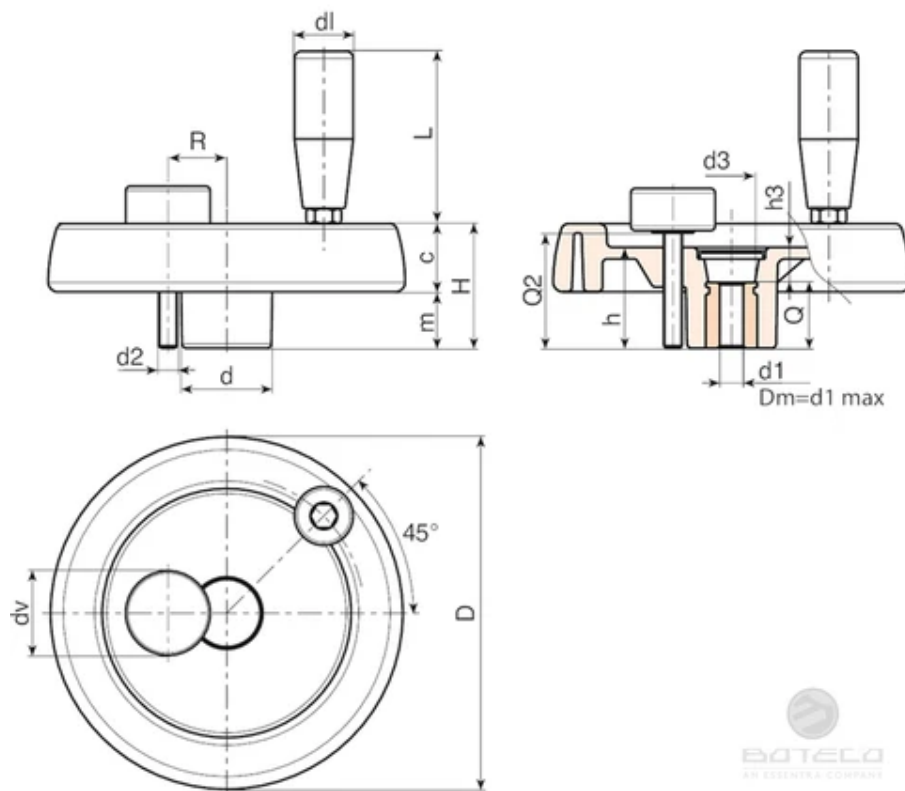

Note: the article codes in the table are incomplete. Communicate the R and Q2 values to obtain the full code. (1/2)

Code	Art.	D	H	h	d	m	c	d3	h3	R	d2	Q2	dl	L	Dm	d1 H10	Q
C970100...	C970100.TP0501P...	100.5	39	34	30.5	18	21	16.5	10	20÷23	M6	A.R.	20	56	16	5	24
C970125...	C970125.TP0501P...	125	44	37	36	20	24	26	13	23÷25	M8	A.R.	21	65	18	5	24
C970150...	C970150.TD0801P...	150	54	44	38	25	29	26	12	25÷28	M8	A.R.	21	65	22	8	32
C970175...	C970175.TD0801P...	173	57	47	40	25.5	31.5	26	15	26÷36	M8	A.R.	23	76	22	8	32
C970200...	C970200.TD0801P...	204	69	49.5	45	24	35	26.5	13.5	28÷42	M8	A.R.	25	86	28	8	36
C970250...	C970250.TD0801P...	251	66,5	56,5	60	27,5	39	36	20,5	36÷50	M8	A.R.	25	86	28	8	36

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

dv = 36 mm (Ø 100 dv = 25 mm). A.R. = On request.

Code	Art.	Weight (g)
C970100...	C970100.TP0501P...	252
C970125...	C970125.TP0501P...	410
C970150...	C970150.TD0801P...	636
C970175...	C970175.TD0801P...	812
C970200...	C970200.TD0801P...	1040
C970250...	C970250.TD0801P...	1590

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

dv = 36 mm (Ø 100 dv = 25 mm). A.R. = On request.

03

SOLID CONTROL HANDWHEEL WITH REVOLVING/FOLDING HANDLE AND LOCKING KNOB

Handwheels with folding handle

Materials:

Reinforced and stabilized polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Handwheel and handle colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

Lateral insert:

Brass insert with threaded through hole.

Lateral handle:

Revolving, folding handle art. M136.

Locking knob:

Black cylindrical knob Ral 9011 art. G793-36 (Ø 100 art. G732-25) with threaded stud.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special requests:


On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.

Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.



BOTECO
Copyright ©

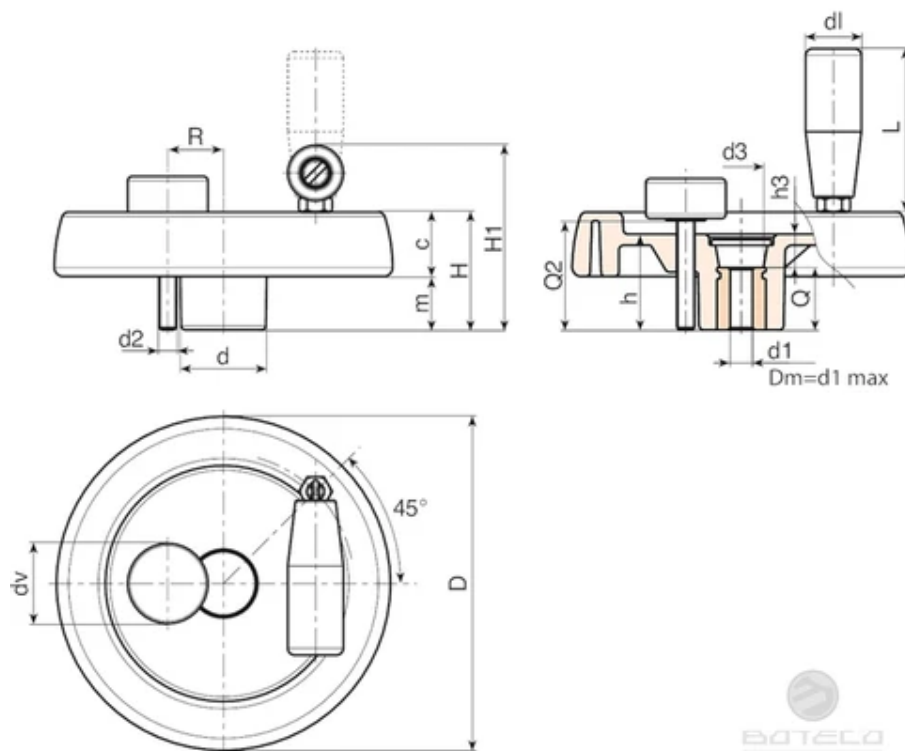

Note: the article codes in the table are incomplete. Communicate the R and Q2 values to obtain the full code. (1/2)

Code	Art.	D	H	H1	h	d	m	c	d3	h3	R	d2	Q2	dl	L	Dm	d1 H10
C980100...	C980100.TP0501P...	100.5	39	63	34	30.5	18	21	16.5	10	20÷23	M6	A.R.	20	56	16	5
C980125...	C980125.TP0501P...	125	44	74	37	36	20	24	26	13	23÷25	M8	A.R.	25	76	18	5
C980150...	C980150.TD0801P...	150	54	89	44	38	25	29	26	12	25÷28	M8	A.R.	26	89	22	8
C980175...	C980175.TD0801P...	173	57	92	47	40	25.5	31.5	26	15	26÷36	M8	A.R.	26	89	22	8
C980200...	C980200.TD0801P...	204	61	94	49.5	45	26	35	26.5	13.5	28÷42	M8	A.R.	26	97	28	8
C980250...	C980250.TD0801P...	251	66,5	100	56,5	60	27,5	39	36	20,5	36÷50	M8	A.R.	26	97	28	8

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

dv = 36 mm (Ø 100 dv = 25 mm). A.R. = On request.

Code	Art.	Q	Weight (g)
C980100...	C980100.TP0501P...	24	295
C980125...	C980125.TP0501P...	24	420
C980150...	C980150.TD0801P...	32	730
C980175...	C980175.TD0801P...	32	885
C980200...	C980200.TD0801P...	36	1100
C980250...	C980250.TD0801P...	36	1640

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

dv = 36 mm (Ø 100 dv = 25 mm). A.R. = On request.

03

SOLID CONTROL HANDWHEEL WITH FOLDAWAY HANDLE AND LOCKING KNOB

Handwheels with revolving handle

Materials:

Reinforced and stabilized polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Handwheel and handle colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

Lateral insert:

Brass insert with threaded through hole.

Lateral handle:

Revolving handle that folds into the handwheel, with hexagonal connection.

Reinforced polyamide handle. Black-oxide treated internal mechanism. Fixed with black-oxide treated hexagon socket button head screw ISO 7838.

Locking knob:

Black cylindrical knob Ral 9011 art. G793-36 with threaded stud.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special requests:


On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.

Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.



BOTECO
Copyright ©

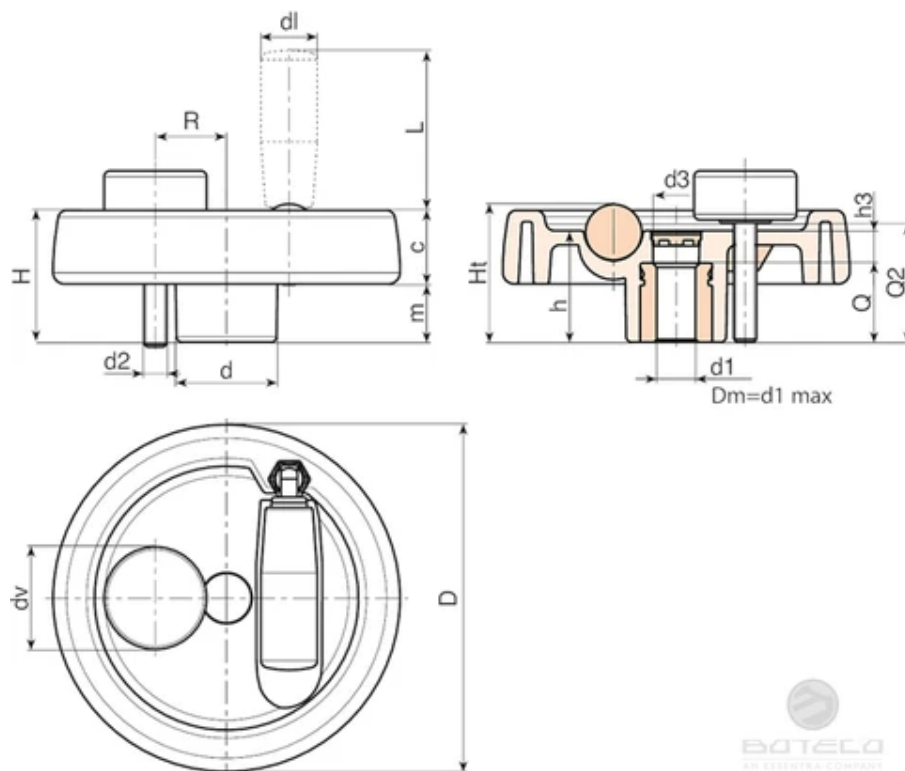

Note: the article codes in the table are incomplete. Communicate the R and Q2 values to obtain the full code. (1/2)

Code	Art.	D	H	Ht	h	d	m	c	d3	h3	R	d2	Q2	d1	L	Dm	d1 H10
C990125...	C990125.TP0501P...	124	48	49.5	40	36	21.5	26.5	16	15	22÷25	M8	A.R.	20	38	18	5
C990150...	C990150.TD0801P...	149	53	-	44	38	24.5	28.5	12	26	25÷28	M8	A.R.	20	58	22	8
C990175...	C990175.TD0801P...	174	58	-	48	40	24.5	33.5	16	26	26÷36	M8	A.R.	26	80	28	8
C990200...	C990200.TD0801P...	198	63	-	53	44	24.5	38.5	17	26	28÷42	M8	A.R.	27	90	28	8
C990250...	C990250.TD0801P...	250	67	-	58	60	29	38	22	36	36÷50	M8	A.R.	27	90	28	8

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

dv = 36 mm. A.R. = On request.

Code	Art.	Q	Weight (g)
C990125...	C990125.TP0501P...	24	410
C990150...	C990150.TD0801P...	32	560
C990175...	C990175.TD0801P...	32	775
C990200...	C990200.TD0801P...	36	1075
C990250...	C990250.TD0801P...	36	1560

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

dv = 36 mm. A.R. = On request.

03

BASE FOR SOLID CONTROL HANDWHEEL WITH PROVISION FOR SIDE HANDLE

Handwheels with revolving handle

Materials:

Reinforced and stabilized polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Alternative cap colours:

Orange (RAL 2004 code 02).

Blue (RAL 5015 code 07).

Yellow (RAL 1021 code 10).

Red (RAL 3000 code 16).

Green (RAL 6024 code 17).

Black (RAL 9011 code 01).

Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

Lateral insert:

Brass insert with threaded through hole.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special requests:

On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.


Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.

Upon request and for special quantities handwheels and caps are available in the colours indicated in the chart (attention: reduced range).



BOTECO
Copyright ©

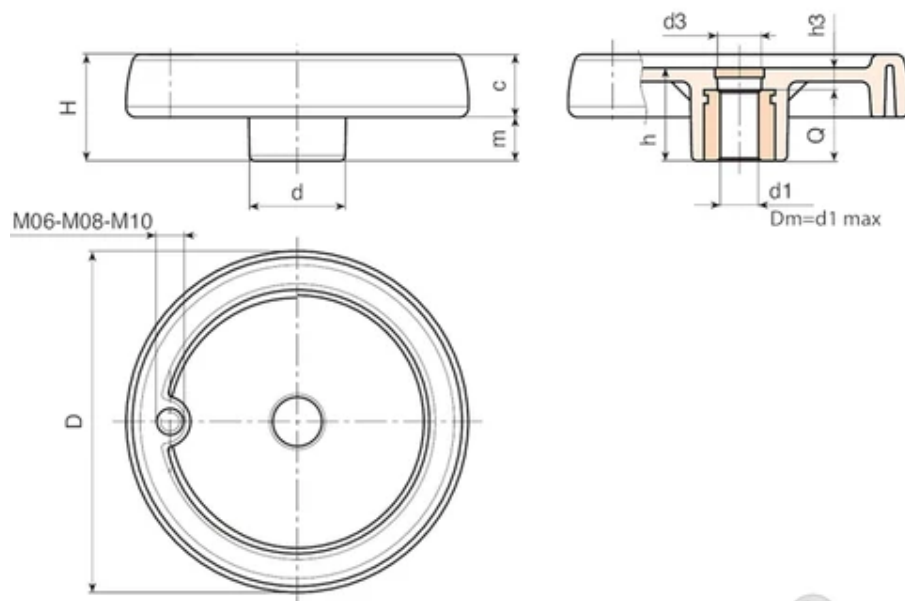

Code	Art.	D	H	h	d	m	c	d3	h3	Dm	d1 H10	Weight (g)	Hole
C080.TP0501PZ1	C080.TP0501PZ1	81	33	29	25	16	17	16	9	12	5	100	M6
C100.TP0501PZ1	C100.TP0501PZ1	100.5	39	34	30.5	18	21	16.5	10	16	5	190	M6
C125.TP0501PZ1	C125.TP0501PZ1	125	44	37	36	20	24	26	13	18	5	290	M8
C150.TD0801PZ1	C150.TD0801PZ1	150	54	44	38	25	29	26	12	22	8	520	M10
C175.TD0801PZ1	C175.TD0801PZ1	173	57	47	40	25.5	31.5	26	15	22	8	660	M10
C200.TD0801PZ1	C200.TD0801PZ1	204	61	49.5	45	26	35	26.5	13.5	28	8	870	M10
C250.TD0801PZ1	C250.TD0801PZ1	251	66,5	56,5	60	27,5	39	36	20,5	28	8	1400	M10

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).

Dm = Maximum obtainable diameter for subsequent machining (widening).

03

ALUMINIUM CONTROL HANDWHEEL WITH SMOOTH BORE

Metalline - Control handwheels

Materials:

Aluminium.

Surface finish:

Low roughness turned surface.

Colour:

Nickel plated (galvanic treatment).

Cap:

Central cap in black polyamide (RAL 9011 code 01).

Alternative Cap colours:

The central cap for the black handwheel will be grey (RAL 7035 code no. 13).

Hole:

Smooth through hole, remachined with H7 tolerance.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special Requests:


Upon request and for special quantities handwheels can be supplied on customer's drawing with hole diameter d1.

Colori alternativi (50 pezzi min.):

Nero verniciato a polveri epossidiche:

(cambiare la lettera finale del codice (H) con la V (W296100.AD10V).



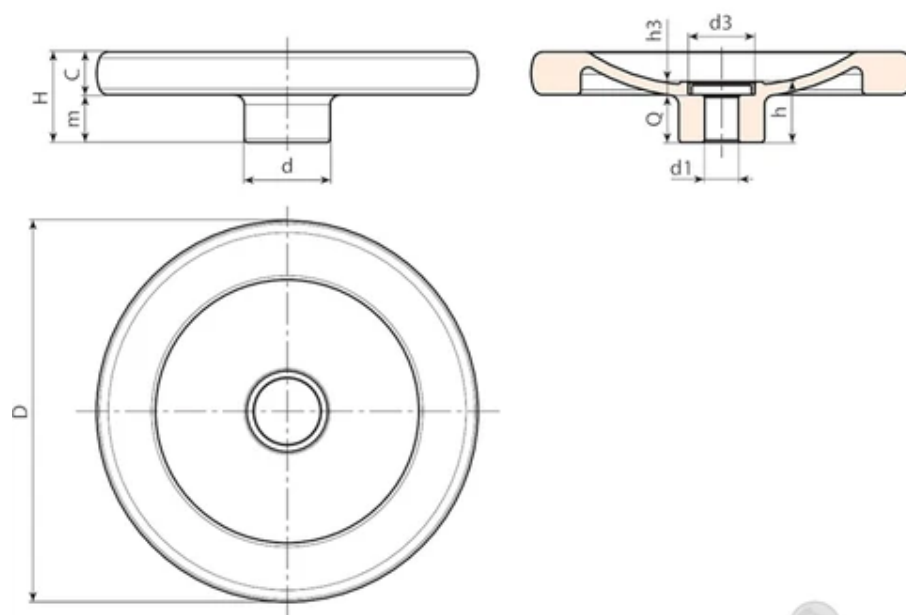


BATECO
AN ESSENTIA COMPANY
Copyright ©

Code	Art.	d	D	H	m	c	h	h3	d3	d1 H7	Q	Weight (g)
W296080.0001	W296080.AD08H	25	80	26	14	12	21	5.5	20	8	15.5	142
W296100.0001	W296100.AD10H	28	100	28	14	14	21.5	5.5	20	10	16	240
W296130.0001	W296130.AD12H	36	130	35	19	16	25.5	5.5	28	12	20	435
W296160.0001	W296160.AD14H	36	160	38	20	18	25.5	5.5	28	14	20	685
W296200.0001	W296200.AD16H	42	200	44	24	20	31.5	6	34	16	25.5	1185

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H7).

03

ALUMINIUM CONTROL HANDWHEEL WITH SMOOTH BORE AND REVOLVING HANDLE

Metalline - Control handwheels

Materials:

Aluminium.

Surface finish:

Low roughness turned surface.

Colour:

Nickel plated (galvanic treatment).

Cap:

Central cap in black polyamide (RAL 9011 code 01).

Alternative cap colours:

The central cap for the black handwheel will be grey (RAL 7035 code no. 13).

Lateral handle:

Revolving handle art. M129.

Hole:

Smooth through hole, remachined with H7 tolerance.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special Requests:


Upon request and for special quantities handwheels can be supplied on customer's drawing with hole diameter d1.

Colori alternativi (50 pezzi min.):

Nero verniciato a polveri epossidiche:

(cambiare la lettera finale del codice (H) con la V (W297100.AD10V).



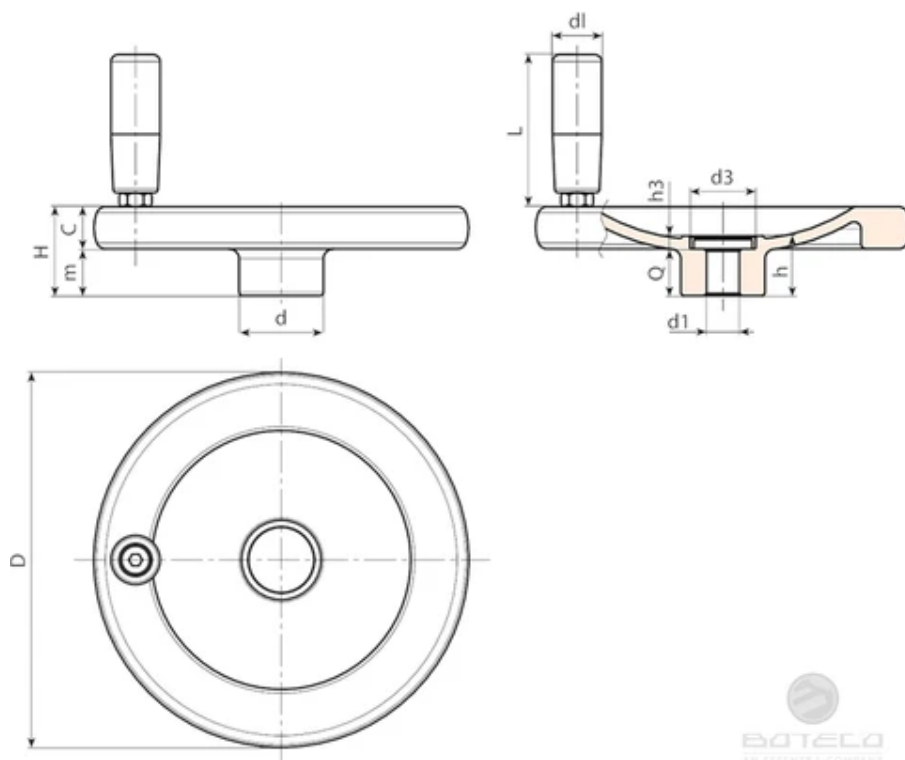

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	Art.	d	D	H	m	c	h	h3	d3	d1 H7	Q	dl	L	Weight (g)
W297080.0001	W297080.AD08H	25	80	26	14	12	21	5.5	20	8	15.5	20	52	185
W297100.0001	W297100.AD10H	28	100	28	14	14	21.5	5.5	20	10	16	20	52	282
W297130.0001	W297130.AD12H	36	130	35	19	16	25.5	5.5	28	12	20	23	62	492
W297160.0001	W297160.AD14H	36	160	38	20	18	25.5	5.5	28	14	20	25	72	778
W297200.0001	W297200.AD16H	42	200	44	24	20	31.5	6	34	16	25.5	25	81	1287

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H7).

03

ALUMINIUM CONTROL HANDWHEEL WITH SMOOTH BORE AND REVOLVING FOLDING HANDLE

Metalline - Control handwheels

Materials:

Aluminium.

Surface finish:

Low roughness turned surface.

Colour:

Nickel plated (galvanic treatment).

Cap:

Central cap in black polyamide (RAL 9011 code 01).

Alternative cap colours:

The central cap for the black handwheel will be grey (RAL 7035 code no. 13).

Lateral handle:

Revolving, folding handle art. M136.

Hole:

Smooth through hole, remachined with H7 tolerance.

Special Requests:

Upon request and for special quantities handwheels can be supplied on customer's drawing with hole diameter d1.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.


Colori alternativi (50 pezzi min.):

Nero verniciato a polveri epossidiche:

(cambiare la lettera finale del codice (H) con la V (W298100.AD10V).



BOTEC
Copyright ©

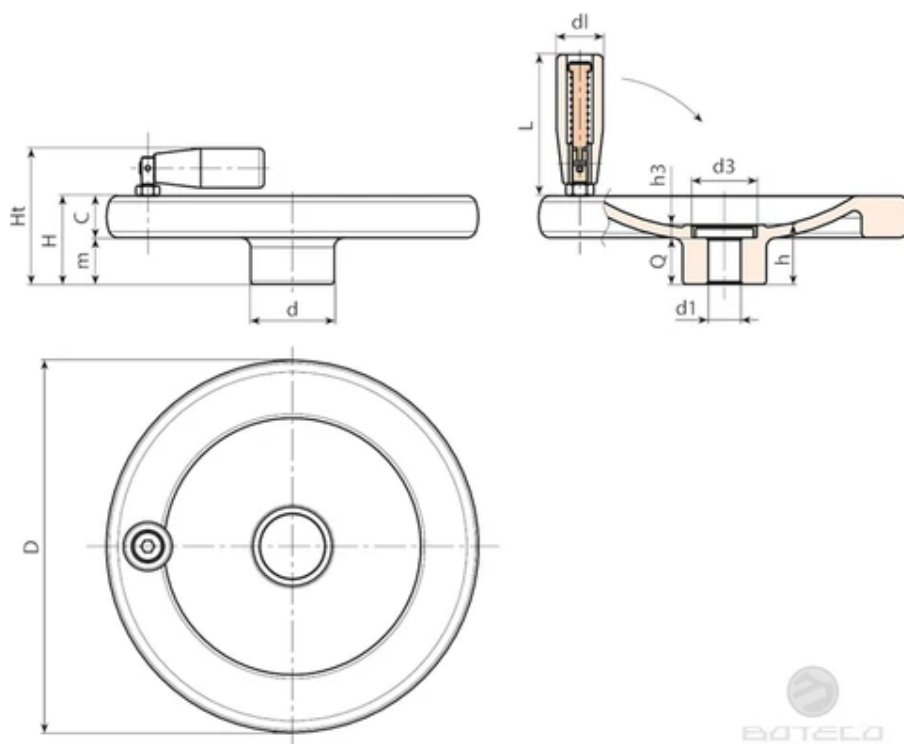

Code	Art.	d	D	H	m	c	h	h3	d3	d1 H7	Q	dl	L	Weight (g)
W298080.0001	W298080.AD08H	25	80	26	14	12	21	5.5	20	8	15.5	20	56	181
W298100.0001	W298100.AD10H	28	100	28	14	14	21.5	5.5	20	10	16	20	56	279
W298130.0002	W298130.AD12H	36	130	35	19	16	25.5	5.5	28	12	20	25	76	506
W298160.0001	W298160.AD14H	36	160	38	20	18	25.5	5.5	28	14	20	25	76	756
W298200.0001	W298200.AD16H	42	200	44	24	20	31.5	6	34	16	25.5	26	89	1337

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H7).