

O300



15

METAL HINGE WITH THROUGH HOLES

Zamak hinges

Materials:

Die-cast zamak alloy (zinc, aluminium and copper alloy).

Surface finish:

Smooth.

Colour:

O300:

Black cataphoresis coating.

O300 Z:

Standard blue galvanising.

Inserts:

Stainless steel pivot pin (Aisi 303).

Holes:

Through holes obtained by moulding. 90° countersunk hole for UNI 5933 – UNI 6109 screws.

Special Requests:


None.



BOTECO
Copyright ©



BOTECO
Copyright ©

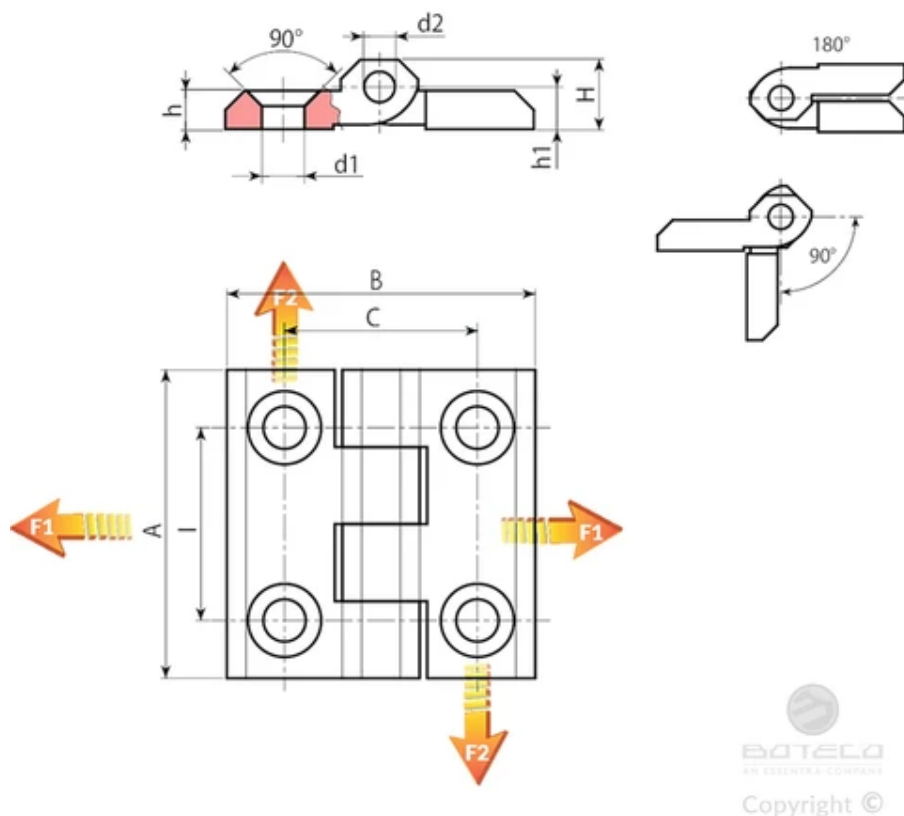

Version O300: zamak hinge, black cataphoresis coating

Code	Art.	I	C	A	B	H	h	h1	d2	d1	Weight (g)	F1 (N)	F2 (N)
O30025.0002	O30025.ZG5.501	25	25	40	40	10	5	5,5	4	5,5	45	-	-
O30030.0002	O30030.ZG6.501	30	30	50	50	11,5	6	6	6	6,5	90	6230	1420
O30036.0002	O30036.ZG6.501	36	36	60	60	15	8	9	6	6,5	115	-	-
O30036.0004	O30036.ZG8.501	36	36	60	60	15	8	9	6	8,5	110	-	-
O30040.0001	O30040.ZG6.501	40	40	64	64	11,5	6	6,5	6	6,5	115	4340	4200

Version O300Z: galvanised zamak hinge

Code	Art.	I	C	A	B	H	h	h1	d2	d1	Weight (g)	F1 (N)	F2 (N)
O30025.0004	O30025.ZG5.5Z	25	25	40	40	10	5	5,5	4	5,5	45	-	-
O30030.0004	O30030.ZG6.5Z	30	30	50	50	11,5	6	6	6	6,5	90	6230	1420
O30036.0003	O30036.ZG6.5Z	36	36	60	60	15	8	9	6	6,5	120	-	-
O30036.0006	O30036.ZG8.5Z	36	36	60	60	15	8	9	6	8,5	112	-	-
O30040.0002	O30040.ZG6.5Z	40	40	64	64	11,5	6	6,5	6	6,5	115	4340	4200

15

STAINLESS STEEL HINGE WITH THROUGH HOLES

Steel hinges

Materials:

Stainless steel (Aisi 316).

Surface finish:

Natural brushing.

Colour:

Natural.

Inserts:

Stainless steel pivot pin (Aisi 303).

Holes:


Through holes obtained by moulding. 90° countersunk hole for UNI 5933 – UNI 6109 screws.

Special Requests:

None.



BOTECO
AN ESSENTIA COMPANY
Copyright ©

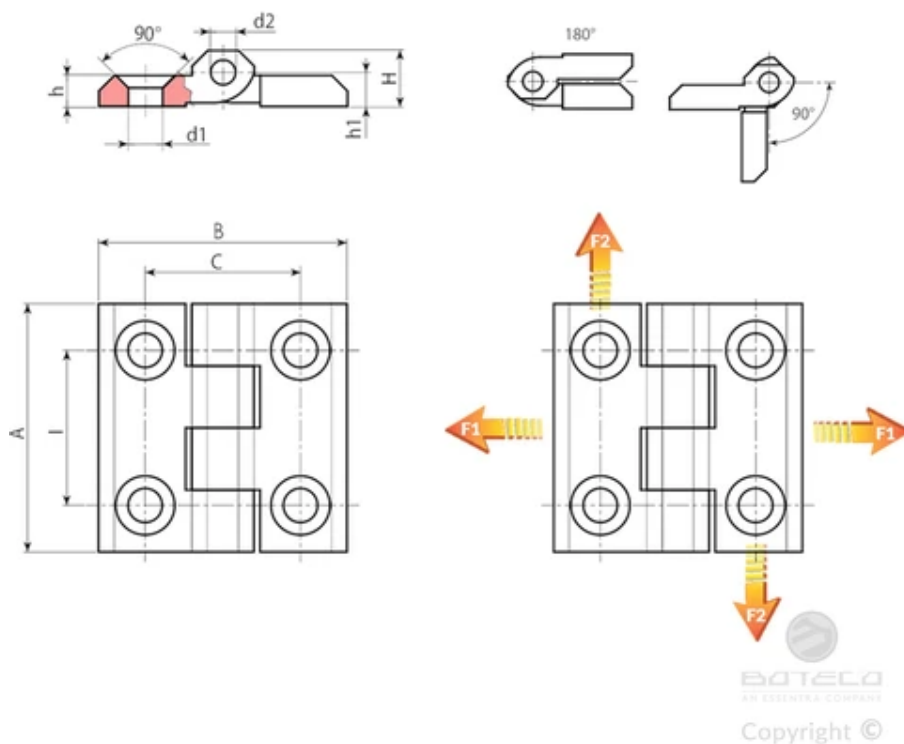

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	Art.	I	C	A	B	H	h	h1	d2	d1	Weight (g)	F1 (N)	F2 (N)
O30025.0001	O30025.HG5.5CIN	25	25	40	40	9	5	5,5	4	5,5	60	-	-

Code	Art.	I	C	A	B	H	h	h1	d2	d1	Weight (g)	F1 (N)	F2 (N)
O30030.0001	O30030.HG6.5CIN	30	30	50	50	11,5	5,5	6,5	6	6,5	100	19600	9800
O30036.0001	O30036.HG8.5CIN	36	36	60	60	15	8	8,5	8	8,5	190	-	-

FLAT ZAMAK HINGE WITH THROUGH HOLES

Zamak hinges

Materials:

Die-cast zamak alloy (zinc, aluminium and copper alloy).

Surface finish:

Satin.

Colour:

Natural.

Inserts:

Galvanised steel pivot pin (C45).

Holes:


Through holes obtained by moulding. 90° countersunk hole for UNI 5933 – UNI 6109 screws.

Special Requests:

None.



BOTECO
Copyright ©

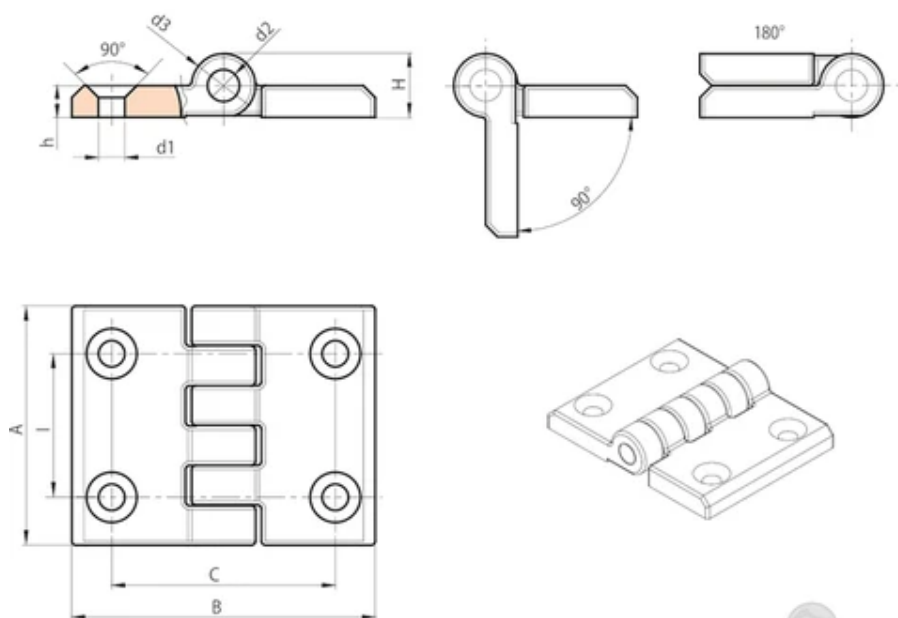

BOTECO
Copyright ©

Code	Art.	I	C	A	B	H	h	d2	d3	d1	Weight (g)
O30536.0001	O30536.ZG06.5PAL	36	56	60	76	16	8	8	16	6,5	250

O305CIN



15

STAINLESS STEEL HINGE WITH THROUGH HOLES

Steel hinges

Materials:

Stainless steel (Aisi 316).

Surface finish:

Natural brushing.

Colour:

Natural.

Inserts:


Stainless steel pivot pin (Aisi 303).

Holes:

Through holes obtained by moulding. 90° countersunk hole for UNI 5933 – UNI 6109 screws.

Special Requests:

None.

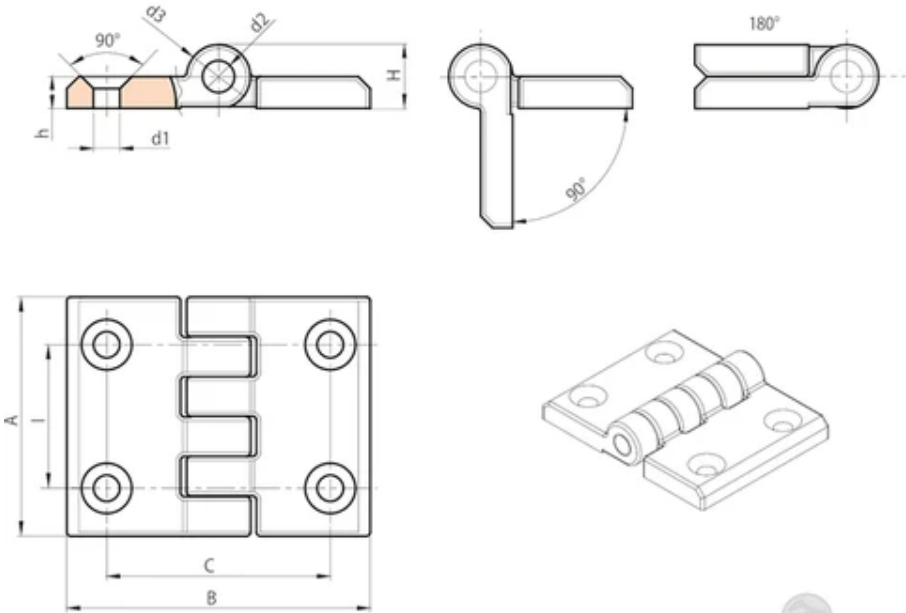

Code	Art.	I	C	A	B	H	h	d2	d3	d1	Weight (g)
O30536.0002	O30536.HG06.5CIN	36	56	60	76	16	8	8	16	6,5	275

HINGE WITH THROUGH HOLES

Plastic hinges with through holes

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin.

Hole:

Version TS:

Through hole obtained by moulding the plastic. Seat for countersunk screw DIN 7991 / UNI 5933.

Version TC:

Through hole obtained by moulding the plastic. Seat for cylindrical head screw DIN 912 / UNI 5931.

Special Requests:


Upon request and for special quantities available in the colours indicated in the chart.



BOTECO
Copyright ©



BOTECO
Copyright ©

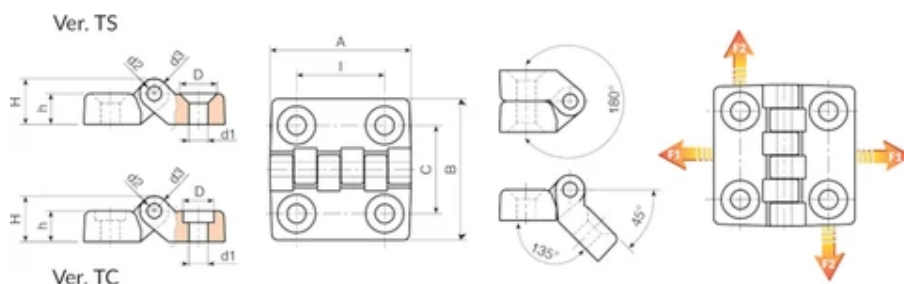

Version O400-TS: with holes for countersunk head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	Weight (g)	F1 (N)	F2 (N)
O40020.0003	O40020.TG04.501TS	20	20	32	32	7	10,5	8,5	3	7	4,5	9	1440	490
O40030.0003	O40030.TG05.501TS	30	30	48	48	10,5	15,5	12,5	5	10	5,5	27	1960	1470
O40030.0007	O40030.TG06.501TS	30	30	48	48	10,5	15,5	12,5	5	10	6,5	27	1960	1470
O40040.0004	O40040.TG06.501TS	40	40	64	64	13	19	12,5	5	12	6,5	53	2850	1520
O40060.0003	O40060.TG08.501TS	60	63	96	96	16	24	16,5	8	16	8,5	152	4300	1810
O40060.0007	O40060.TG10.501TS	60	63	96	96	16	24	20,5	8	16	10,5	152	4300	1810

Version O400-TC: with holes for cylindrical head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	Weight (g)	F1 (N)	F2 (N)
O40020.0001	O40020.TG04.501TC	20	20	32	32	7	10,5	7,5	3	7	4,5	9	1440	490
O40030.0001	O40030.TG05.501TC	30	30	48	48	10,5	15,5	10,5	5	10	5,5	27	1960	1470
O40030.0005	O40030.TG06.501TC	30	30	48	48	10,5	15,5	10,5	5	10	6,5	27	1960	1470
O40040.0002	O40040.TG06.501TC	40	40	64	64	13	19	10,5	5	12	6,5	53	2850	1520
O40060.0001	O40060.TG08.501TC	60	63	96	96	16	24	13,5	8	16	8,5	152	4300	1810
O40060.0005	O40060.TG10.501TC	60	63	96	96	16	24	16,5	8	16	10,5	152	4300	1810

15

HINGE WITH THROUGH HOLES WITH STAINLESS STEEL PIN

Plastic hinges with through holes

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Stainless steel pin (Aisi 303).

Hole:

Version TS:

Through hole obtained by moulding the plastic. Seat for countersunk screw DIN 7991 / UNI 5933.

Version TC:


Through hole obtained by moulding the plastic. Seat for cylindrical head screw DIN 912 / UNI 5931.

Special Requests:

Upon request and for special quantities available in the colours indicated in the chart.



BOTECO
Copyright ©

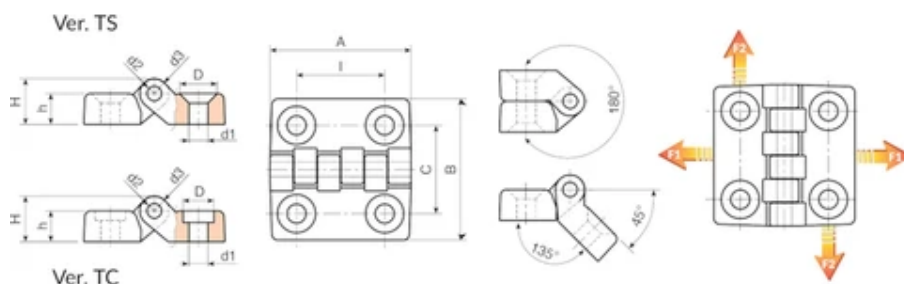

Version O400-TS CIN: with holes for countersunk head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	Weight (g)	F1 (N)	F2 (N)
O40020.0004	O40020.TG04.501TSCIN	20	20	32	32	7	10,5	8,5	3	7	4,5	9	1440	490
O40030.0004	O40030.TG05.501TSCIN	30	30	48	48	10,5	15,5	12,5	5	10	5,5	27	1960	1470
O40030.0008	O40030.TG06.501TSCIN	30	30	48	48	10,5	15,5	12,5	5	10	6,5	27	1960	1470
O40040.0005	O40040.TG06.501TSCIN	40	40	64	64	13	19	12,5	5	12	6,5	53	2850	1520
O40060.0004	O40060.TG08.501TSCIN	60	63	96	96	16	24	16,5	8	16	8,5	152	4300	1810
O40060.0008	O40060.TG10.501TSCIN	60	63	96	96	16	24	20,5	8	16	10,5	152	4300	1810

Version O400-TC CIN: with holes for cylindrical head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	Weight (g)	F1 (N)	F2 (N)
O40020.0002	O40020.TG04.501TCCIN	20	20	32	32	7	10,5	7,5	3	7	4,5	9	1440	490
O40030.0002	O40030.TG05.501TCCIN	30	30	48	48	10,5	15,5	10,5	5	10	5,5	27	1960	1470
O40030.0006	O40030.TG06.501TCCIN	30	30	48	48	10,5	15,5	10,5	5	10	6,5	27	1960	1470
O40040.0003	O40040.TG06.501TCCIN	40	40	64	64	13	19	10,5	5	12	6,5	53	2850	1520
O40060.0002	O40060.TG08.501TCCIN	60	63	96	96	16	24	13,5	8	16	8,5	152	4300	1810
O40060.0006	O40060.TG10.501TCCIN	60	63	96	96	16	24	16,5	8	16	10,5	152	4300	1810

15

HINGE WITH THROUGH HOLES MADE FROM BLUE FOOD- GRADE MATERIAL

Plastic hinges with through holes

Notes: Articles produced with materials suitable for contact with foodstuffs; they are used in machinery and equipment for the food industry. The Blue RAL 5005 colour makes it easy to identify an article, or part of an article, that has accidentally ended up in a food processing procedure and can be immediately removed. The inserts are all made of Aisi 303, or Aisi 304 on request.

Materials:

Food-grade reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Blue: (RAL 5005 cod. 95).

Inserts:

Stainless steel pin (Aisi 303).

Hole:

Version TS:

Through hole obtained by moulding the plastic. Seat for countersunk screw DIN 7991 / UNI 5933.

Version TC:


Through hole obtained by moulding the plastic. Seat for cylindrical head screw DIN 912 / UNI 5931.

Special Requests:

None.



BATECO
BATECO S.p.A. - Italy
Copyright ©

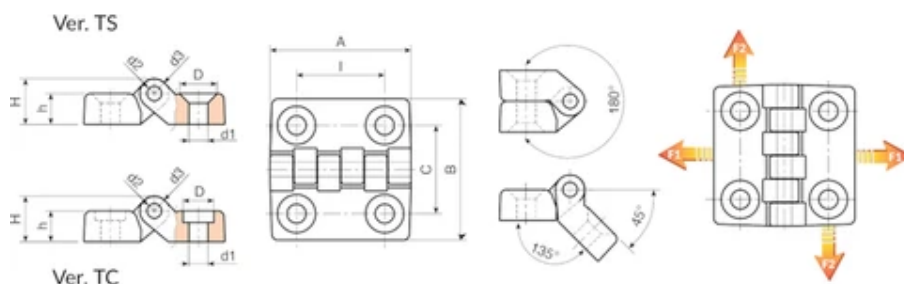


Version O400ID-TS: with holes for countersunk head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	Weight (g)	F1 (N)	F2 (N)
O40020.0006	O40020.TG04.595TSID	20	20	32	32	7	10,5	8,5	3	7	4,5	9	1440	490
O40030.0012	O40030.TG05.595TSID	30	30	48	48	10,5	15,5	12,5	5	10	5,5	27	1960	1470
O40030.0013	O40030.TG06.595TSID	30	30	48	48	10,5	15,5	12,5	5	10	6,5	27	1960	1470
O40040.0007	O40040.TG06.595TSID	40	40	64	64	13	19	12,5	5	12	6,5	53	2850	1520
O40060.0010	O40060.TG08.595TSID	60	63	96	96	16	24	16,5	8	16	8,5	152	4300	1810
O40060.0009	O40060.TG10.595TSID	60	63	96	96	16	24	20,5	8	16	10,5	152	4300	1810

Version O400ID-TC: with holes for cylindrical head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	Weight (g)	F1 (N)	F2 (N)
O40020.0007	O40020.TG04.595TCID	20	20	32	32	7	10,5	7,5	3	7	4,5	9	1440	490
O40030.0014	O40030.TG05.595TCID	30	30	48	48	10,5	15,5	10,5	5	10	5,5	27	1960	1470
O40030.0015	O40030.TG06.595TCID	30	30	48	48	10,5	15,5	10,5	5	10	6,5	27	1960	1470
O40040.0008	O40040.TG06.595TCID	40	40	64	64	13	19	10,5	5	12	6,5	53	2850	1520
O40060.0011	O40060.TG08.595TCID	60	63	96	96	16	24	13,5	8	16	8,5	152	4300	1810
O40060.0012	O40060.TG10.595TCID	60	63	96	96	16	24	16,5	8	16	10,5	152	4300	1810

O402



15

FLAT HINGE WITH LOWERED PIVOT PIN AND THROUGH HOLES

Plastic hinges with through holes

The O402 hinge has been expressly designed to be used on aluminum profiles used for the construction of barriers or modular structures.

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin.

Hole:

Through hole obtained by moulding the plastic. Hole for hex head screw UNI 5727.

Special Requests:


Upon request and for special quantities available in the colours indicated in the chart.



BOTECO
Copyright ©




BOTECO
Copyright ©

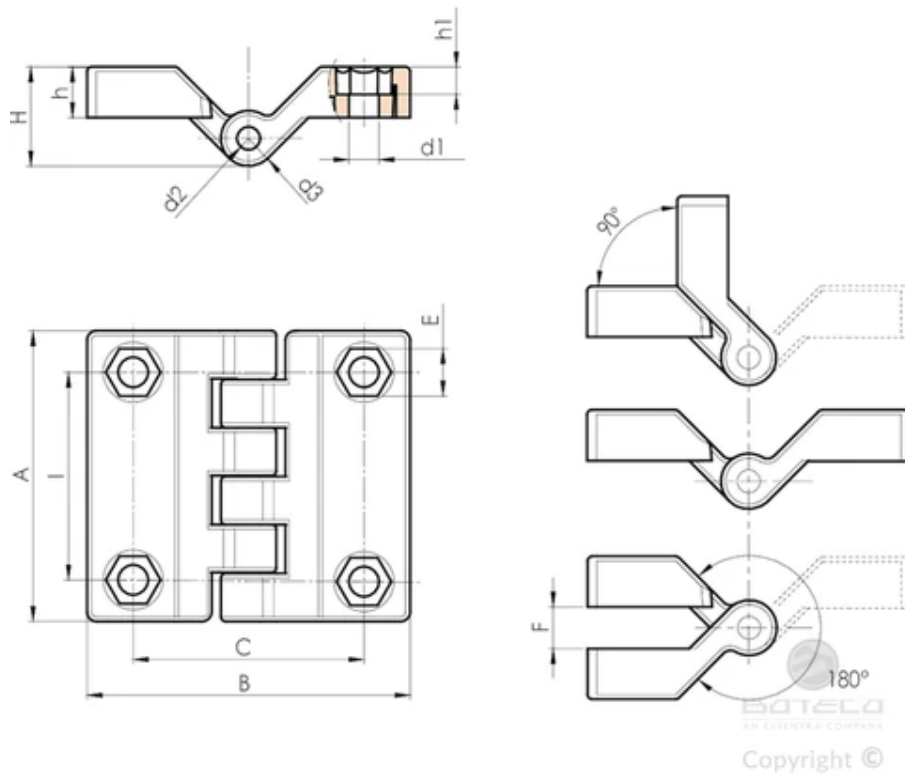

Code	art.	I	C	A	B	E	F	h	h1	H	d2	d3	d1	Weight (g)
O402045.0001	O402045.TG06.501	45	50	63	70	10	9	11	6	21.5	5	12	6.5	45

O410



15

SHIM FOR HINGE O400

Plastic hinges with through holes

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Hole:

Through hole obtained by moulding the plastic.

Special Requests:



Upon request and for special quantities available in the colours indicated in the chart.




BOTECA
Copyright ©




BOTECA
Copyright ©

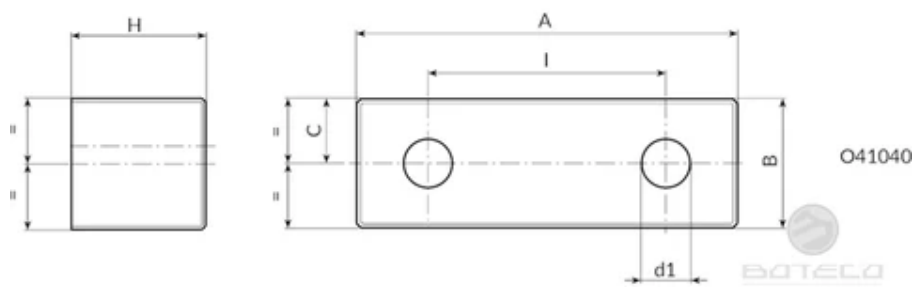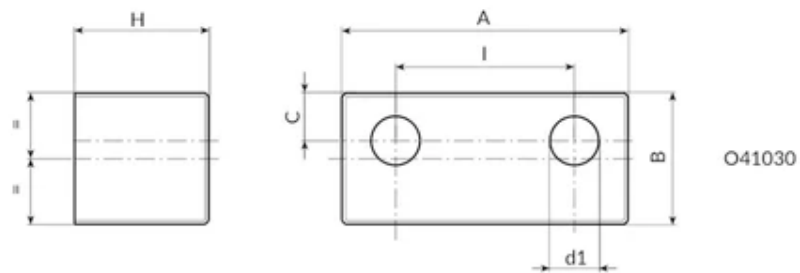

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	I	C	A	B	H	d1	Weight (g)
O41030.0001	O41030.TG08.501	30	8	48	22	22.5	8.5	19
O41040.0001	O41040.TG08.501	40	11	65	22	22.5	8.5	24

15

FLAT HINGE WITH THREADED HOLE INSERT

Plastic hinges with threaded inserts

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin.

Brass insert with female threaded hole (thread tolerance 6H).




BOTECO
Copyright ©

Special Requests:

Upon request and for special quantities inserts can be supplied in different materials.

Upon request and for special quantities available in the colours indicated in the chart.

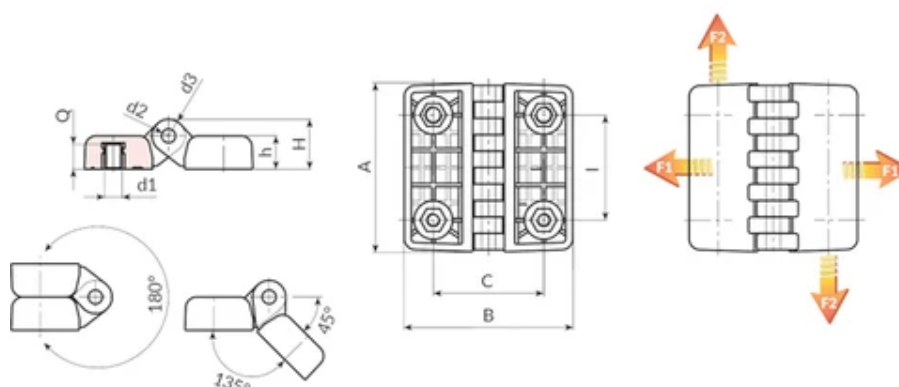

BOTECO
AN ESSENTRA COMPANY
Copyright ©

Code	art.	I	C	A	B	h	H	d2	d3	d16H	Q	Weight (g)	F1 (N)	F2 (N)
O43030.0001	O43030.TM0501	30	30	48	48	10.5	15.5	5	10	M5	7	35	2000	1370
O43030.0002	O43030.TM0601	30	30	48	48	10.5	15.5	5	10	M6	7	35	2000	1370
O43040.0001	O43040.TM0601	40	40	64	64	13	19	5	12	M6	8,5	67	4100	1800
O43040.0004	O43040.TM0801	40	40	64	64	13	19	5	12	M8	8,5	65	4100	1800
O43060.0001	O43060.TM0801	60	63	96	96	19	28.5	8	19	M8	14	220	2450	2650
O43060.0002	O43060.TM1001	60	63	96	96	19	28.5	8	19	M10	14	228	2450	2650

15

FLAT HINGE WITH THREADED STUD

Plastic hinges with threaded inserts

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.


Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin.

Galvanised steel threaded stud (thread tolerance 6g).

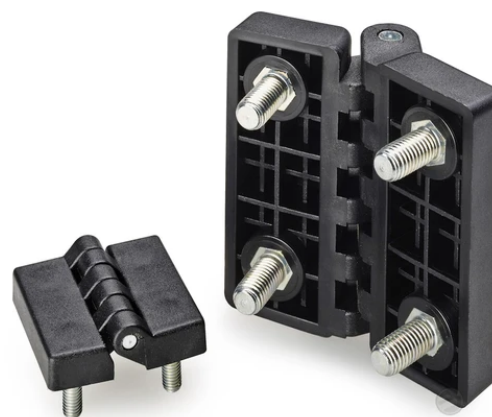


BOTECO
Copyright ©

Special Requests:

Upon request and for special quantities inserts can be supplied in different materials.

Upon request and for special quantities available in the colours indicated in the chart.

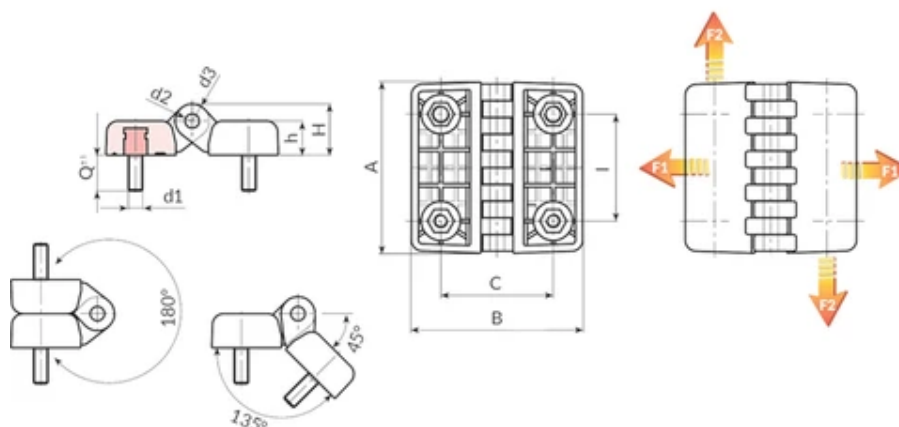

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	I	C	A	B	h	H	d2	d3	d1 6g	Q	Weight (g)	F1(N)	F2(N)
O43130.0001	O43130.TM05X1501	30	30	48	48	10.5	15.5	5	10	M5	15	49	1780	1370
O43130.0002	O43130.TM06X1501	30	30	48	48	10.5	15.5	5	10	M6	15	52	1780	1370
O43140.0001	O43140.TM06X2001	40	40	64	64	13	19	5	12	M6	20	90	4120	1760
O43140.0003	O43140.TM08X2001	40	40	64	64	13	19	5	12	M8	20	100	4120	1760
O43160.0001	O43160.TM08X2001	60	63	96	96	19	28.5	8	19	M8	20	260	4900	1275
O43160.0002	O43160.TM10X2001	60	63	96	96	19	28.5	8	19	M10	20	278	4900	1275

15

FLAT HINGE WITH THREADED STUD AND THREADED HOLE INSERT

Plastic hinges with threaded inserts

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin.


Brass insert with female threaded hole (thread tolerance 6H).

Galvanised steel threaded stud (thread tolerance 6g).


Special Requests:

Upon request and for special quantities inserts can be supplied in different materials.

Upon request and for special quantities available in the colours indicated in the chart.

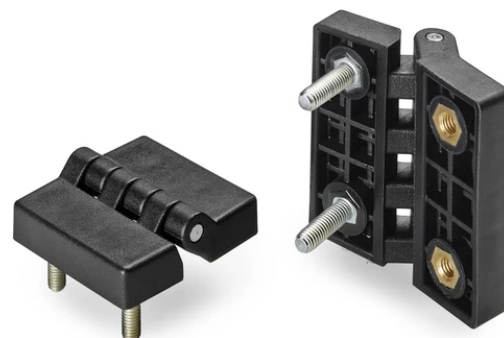

BOTECO
Copyright ©

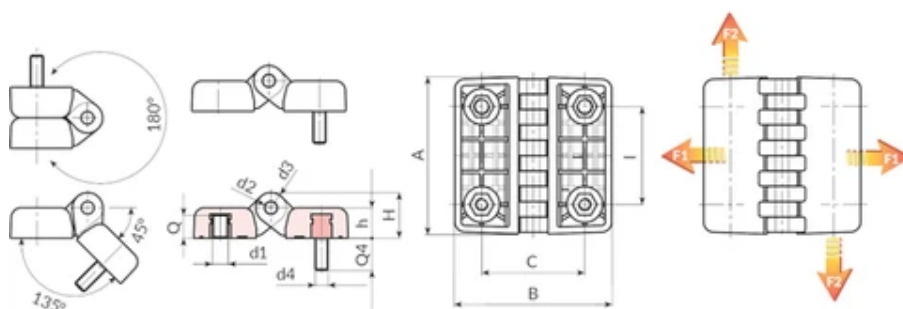

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	I	C	A	B	h	H	d2	d3	d1-d4	Q	Q4	Weight (g)	F1 (N)	F2 (N)
O43230.0001	O43230.TM0501	30	30	48	48	10.5	15.5	5	10	M05	7	15	40	1850	1350
O43230.0002	O43230.TM0601	30	30	48	48	10.5	15.5	5	10	M06	7	15	41	1850	1350
O43240.0001	O43240.TM0601	40	40	64	64	13	19	5	12	M06	8,5	20	73	4000	1600
O43240.0002	O43240.TM0801	40	40	64	64	13	19	5	12	M08	8,5	20	85	4000	1600
O43260.0001	O43260.TM0801	60	63	96	96	19	28.5	8	19	M08	14	20	240	3100	1400
O43260.0003	O43260.TM1001	60	63	96	96	19	28.5	8	19	M10	14	20	250	3100	1400

15

FLAT HINGE WITH THROUGH HOLE AND THREADED HOLE INSERT

Plastic hinges with through holes

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin.

Brass insert with female threaded hole (thread tolerance 6H).

Hole:

Version TS:

Through hole obtained by moulding the plastic. Seat for countersunk screw DIN 7991 / UNI 5933.

Version TC:

Through hole obtained by moulding the plastic. Seat for cylindrical head screw DIN 912 / UNI 5931.


Special Requests:

Upon request and for special quantities inserts can be supplied in different materials.

Upon request and for special quantities available in the colours indicated in the chart.



BOTECO
Copyright ©

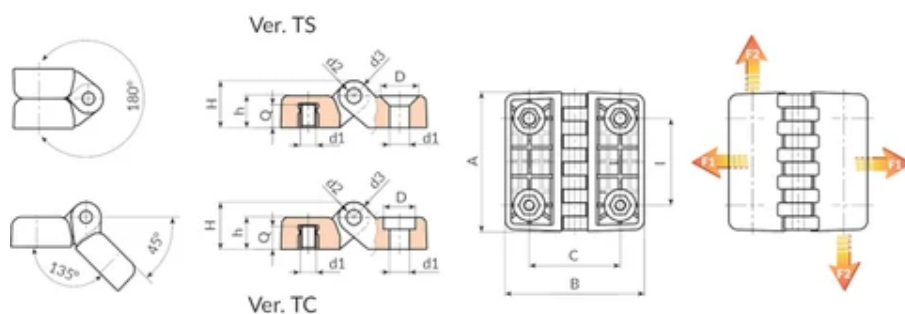

Version O433-TS: with holes for countersunk head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	Q	Weight (g)	F1 (N)	F2 (N)
O43330.0002	O43330.TM0601TS	30	30	48	48	10,5	15,5	12,5	5	10	M6 / 6,5	7	31	2000	1450
O43340.0002	O43340.TM0601TS	40	40	64	64	13	19	12,5	5	12	M6 / 6,5	8,5	60	3500	1650

Version O433-TC: with holes for cylindrical head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	Q	Weight (g)	F1 (N)	F2 (N)
O43330.0001	O43330.TM0601TC	30	30	48	48	10,5	15,5	10,5	5	10	M6 / 6,5	7	31	2000	1450
O43340.0001	O43340.TM0601TC	40	40	64	64	13	19	10,5	5	12	M6 / 6,5	8,5	60	3500	1650

15

FLAT HINGE WITH THREADED STUD AND THROUGH HOLE

Plastic hinges with through holes

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin.

Galvanised steel threaded stud (thread tolerance 6g).

Hole:

Version TS:

Through hole obtained by moulding the plastic. Seat for countersunk screw DIN 7991 / UNI 5933.


Version TC:

Through hole obtained by moulding the plastic. Seat for cylindrical head screw DIN 912 / UNI 5931.


Special Requests:

Upon request and for special quantities inserts can be supplied in different materials.

Upon request and for special quantities available in the colours indicated in the chart.

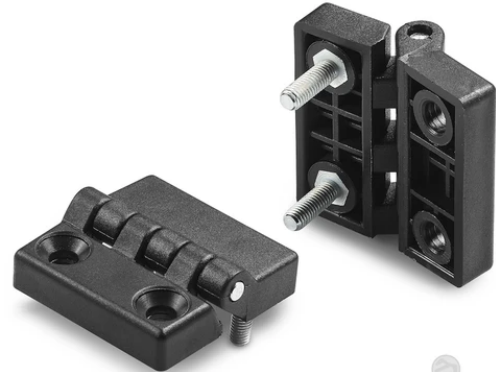

BOTECO
Copyright ©

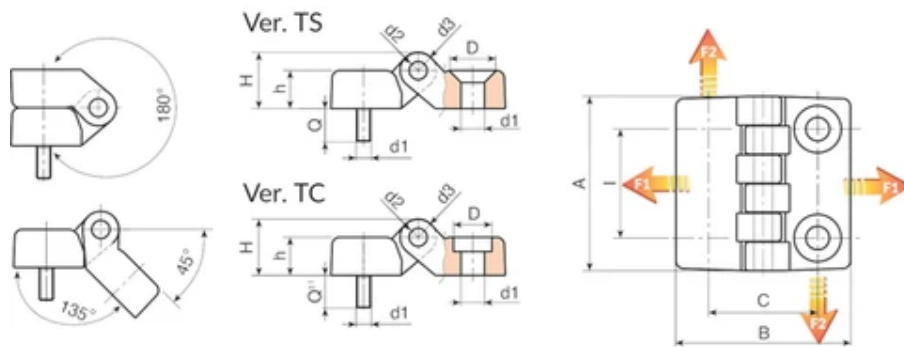

Version O434-TS: with holes for countersunk head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	Q	Weight (g)	F1 (N)	F2 (N)
O43430.0002	O43430.TM0601TS	30	30	48	48	10,5	15,5	12,5	5	10	M6 / 6,5	15	31	2000	1450
O43440.0002	O43440.TM0601TS	40	40	64	64	13	19	12,5	5	12	M6 / 6,5	20	60	3500	1650

Version O434-TC: with holes for cylindrical head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	Q	Weight (g)	F1 (N)	F2 (N)
O43430.0001	O43430.TM0601TC	30	30	48	48	10,5	15,5	10,5	5	10	M6 / 6,5	15	31	2000	1450
O43440.0001	O43440.TM0601TC	40	40	64	64	13	19	10,5	5	12	M6 / 6,5	20	60	3500	1650

15

UNIVERSAL HINGE WITH THREADED INSERT TO MOUNT STRAIGHT DOOR

Plastic hinges with threaded inserts

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin.

Brass insert with female threaded hole (thread tolerance 6H).


(*) Galvanised steel insert with female threaded hole (thread tolerance 6H).

Special Requests:

None.



BOTECO
Copyright ©

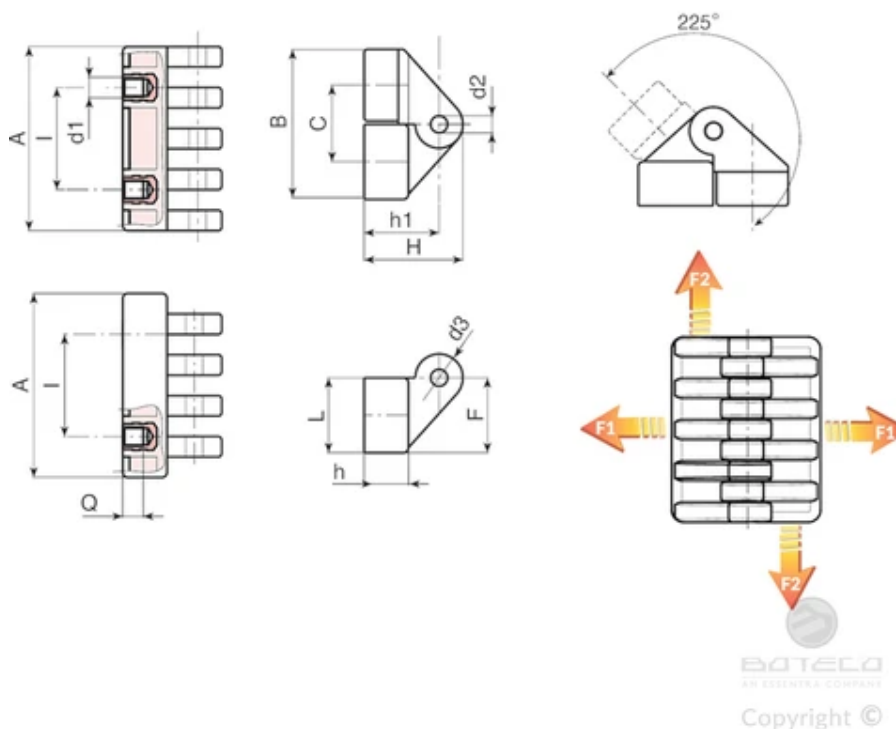

Code	art.	I	C	A	L	B	F	h	h1	H	d2	d3	d16H	Q	Weight (g)	F1(N)	F2(N)
O45030.0001	O45030.TM0501	15	18	30	17	35	17,5	11	19	24,5	4	11	M5	6	26	1180	1130
O45054.0001	O45054.TM0601	30	22,5	54	21,5	44	22	13	22,5	30	5	15	M6	7	58	1520	2980
O45078.0001	O45078.TM0801	42	31	78	30	61	30,5	18,5	31,5	42,5	8	22	(*) M8	9	178	885	2875

O451



15

UNIVERSAL HINGE WITH THREADED STUD TO MOUNT STRAIGHT DOOR

Plastic hinges with threaded inserts

Materials:

Reinforced polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:


Black (RAL 9011).

Inserts:

Galvanised steel pin.
Galvanised steel threaded stud (thread tolerance 6g).

Special Requests:

None.

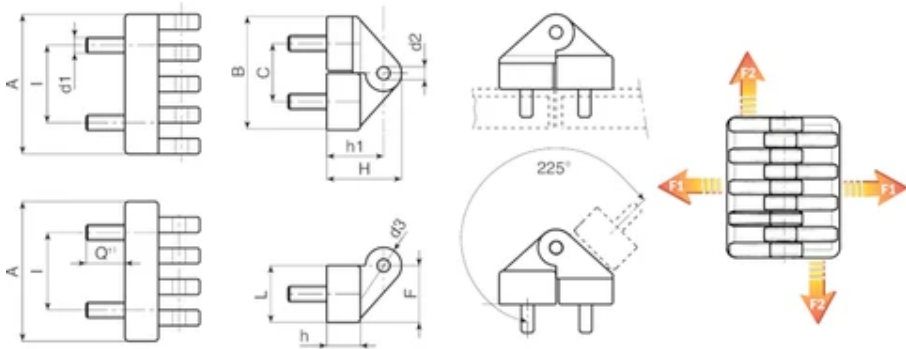

Code	art.	I	C	A	B	L	F	h	h1	H	d2	d3	d1 6g	Q	Weight (g)	F1 (N)	F2 (N)
O45130.0001	O45130.TM05X1001	15	18	30	35	17	17,5	11	19	24,5	4	11	M5	10	38	690	1080

Code	art.	I	C	A	B	L	F	h	h1	H	d2	d3	d1 6g	Q	Weight (g)	F1 (N)	F2 (N)
O45154.0001	O45154.TM06X1501	30	22,5	54	44	21,5	22	13	22,5	30	5	15	M6	15	72	295	1670
O45178.0001	O45178.TM08X2001	42	31	78	61	30	30,5	18,5	31,5	42,5	8	22	M8	20	190	1025	2830

15

UNIVERSAL HINGE WITH THREADED INSERT TO MOUNT ANGULAR DOOR

Plastic hinges with threaded inserts

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin.

Brass insert with female threaded hole (thread tolerance 6H).


(*) Galvanised steel insert with female threaded hole (thread tolerance 6H).

Special Requests:

None.



BOTECO
AN ESSENTIA COMPANY
Copyright ©

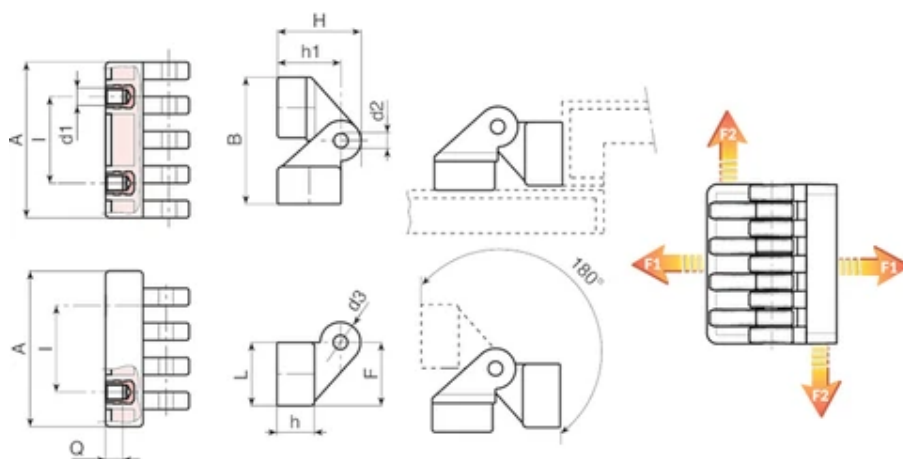

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	I	C	A	B	L	F	h	h1	H	d2	d3	d16H	Q	Weight (g)	F1 (N)	F2 (N)
O45230.0001	O45230.TM0501	15	28	30	36,5	17	17,5	11	19	24,5	4	11	M5	6	26	1180	1130
O45254.0001	O45254.TM0601	30	33,8	54	44,5	21,5	22	13	22,5	30	5	15	M6	7	58	1520	2980
O45278.0001	O45278.TM0801	42	47	78	62	30	30,5	18,5	31,5	42,5	8	22	(*) M8	9	178	885	2875

UNIVERSAL HINGE WITH THREADED STUD TO MOUNT ANGULAR DOOR

Plastic hinges with threaded inserts

Materials:

Reinforced polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:


Galvanised steel pin.
Galvanised steel threaded stud (thread tolerance 6g).

Special Requests:

None.



BOTECO
Copyright ©

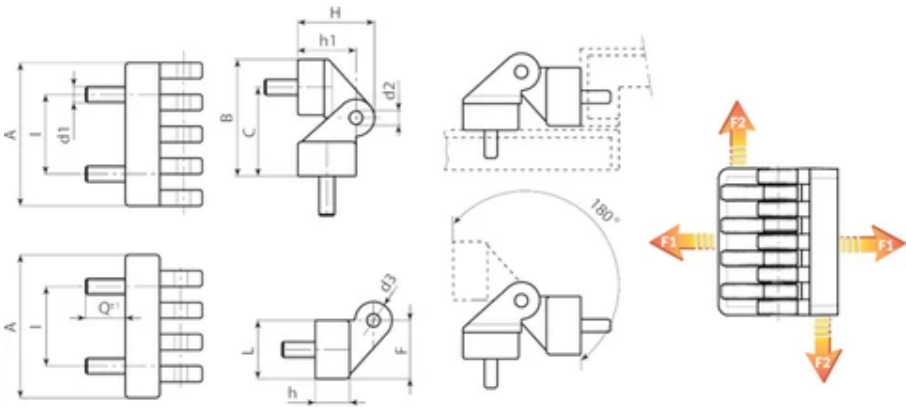

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	I	C	A	B	L	F	h	h1	H	d2	d3	d1 6g	Q	Weight (g)	F1 (N)	F2 (N)
O45330.0001	O45330.TM05X1001	15	28	30	36,5	17	17,5	11	19	24,5	4	11	M5	10	38	690	1080

Code	art.	I	C	A	B	L	F	h	h1	H	d2	d3	d1 6g	Q	Weight (g)	F1 (N)	F2 (N)
O45354.0001	O45354.TM06X1501	30	33,8	54	44,5	21,5	22	13	22,5	30	5	15	M6	15	72	295	1670
O45378.0001	O45378.TM08X2001	42	47	78	62	30	30,5	18,5	31,5	42,5	8	22	M8	20	190	1025	2830

UNIVERSAL HINGE WITH THREADED STUD AND INSERT TO MOUNT STRAIGHT DOOR

Plastic hinges with threaded inserts

Materials:

Reinforced polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:


Galvanised steel pin.
Galvanised steel threaded stud (thread tolerance 6g).
Brass insert with female threaded hole (thread tolerance 6H).

Special Requests:

None.



BOTECO
AN ESSENTIA COMPANY
Copyright ©

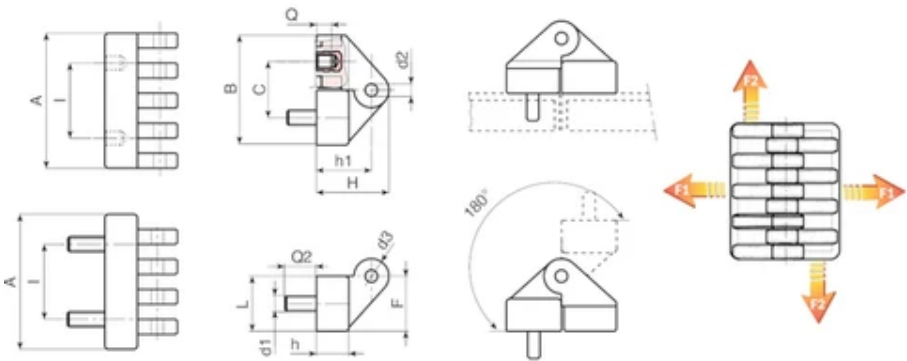

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	I	C	A	B	L	F	h	h1	H	d2	d3	d1	Q	Q2	Weight (g)	F1(N)
O45454.0001	O45454.TM0601	30	22,5	54	44	21,5	22	13	22,5	30	5	15	M6	7	15	72	295

Code	art.	F2 (N)
O45454.0001	O45454.TM0601	1670

UNIVERSAL HINGE WITH THREADED STUD AND INSERT TO MOUNT ANGULAR DOOR

Plastic hinges with threaded inserts

Materials:

Reinforced polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:


Galvanised steel pin.
Galvanised steel threaded stud (thread tolerance 6g).
Brass insert with female threaded hole (thread tolerance 6H).

Special Requests:

None.



BOTECO
Copyright ©

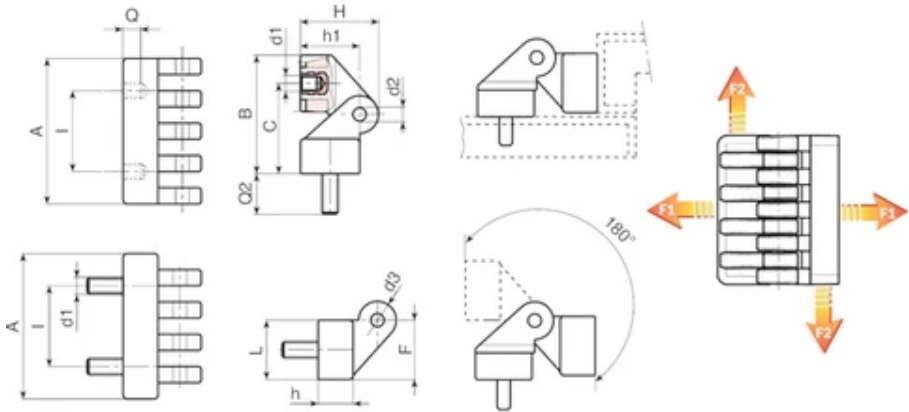

BOTECO
Copyright ©

Code	art.	I	C	A	B	L	F	h	h1	H	d2	d3	d1	Q	Q2	Weight (g)	F1(N)
O45554.0001	O45554.TM0601	30	22,5	54	44	21,5	22	13	22,5	30	5	15	M6	7	15	72	295

Code	art.	F2 (N)
O45554.0001	O45554.TM0601	1670

HINGE WITH ADJUSTABLE FRICTION AND THROUGH HOLE

Hinges with friction/lock

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

- (4) Galvanised steel pin.
- (1) Stainless steel friction adjusting screw (Aisi 304).
- (2) Stainless steel nut for adjusting screw (Aisi 304).
- (3) Pivot pin cap in PA6.

Hole:

Through hole obtained by moulding the plastic for fixing screw
(O460032=M04 O460047=M06).

Adjusting the friction device:

Using a screw driver to turn the adjusting screw (1), the friction can be set to a maximum of:


O460032: 0.8 Nm.

O460047: 4 Nm.

Special Requests:

None.



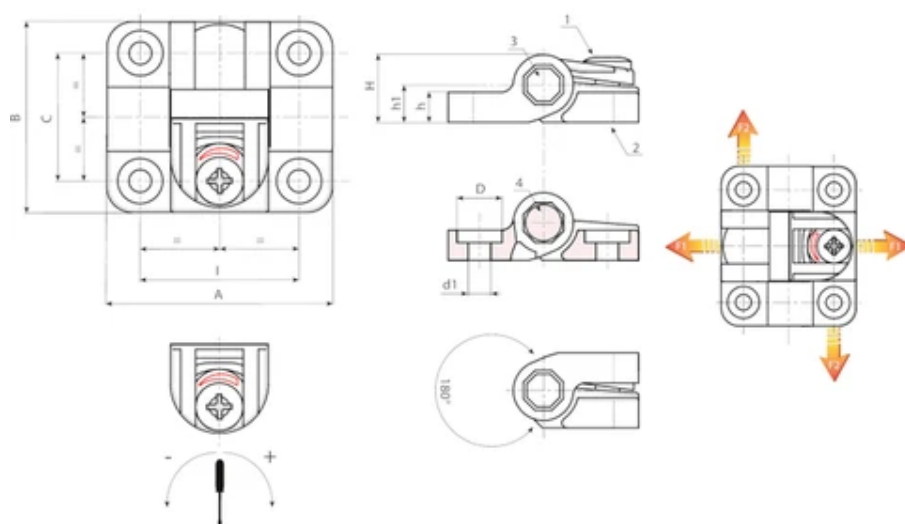


 BOTELO
 AN ESSENTIA COMPANY
 Copyright ©

Code	art.	I	C	A	B	H	h	h1	D	d1	Weight (g)	F1 (N)	F2 (N)
O460032.0001	O460032.TG04.501	32	25,5	45	38	13,5	6	7,5	9	4,5 (M4)	17	700	1400
O460047.0001	O460047.TG06.501	47,5	38	63,5	58	20,5	8,5	11,5	12,5	6,5 (M6)	47	1500	2250

15

DETENT HINGE WITH PRESET POSITIONS AND HOLE COVER CAP

Hinges with friction/lock

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin;

Stainless steel thrust and lock springs (Aisi 302);

(1) Pin cap in PA6.

(2) Hole cover cap in reinforced PA6.

Hole:

Through hole obtained by moulding the plastic, for screw M05.

Preset positions:





The springs that act on the pivot pin have three torque calibrations: 0.7 Nm, 1.1 Nm and 1.7 Nm. The preset detent positions are: 80° - 115° - 150°.

Attention: a version of the hinge without springs with free movement to 180° is also available (code O470034.TG5.501).

Special Requests:

None.



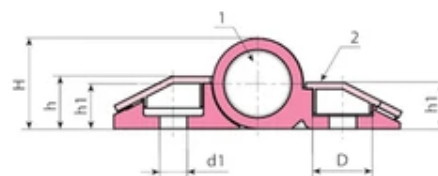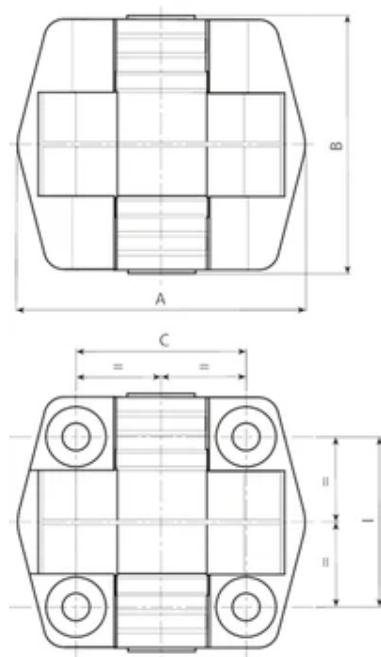

BOTELO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	I/C	A°	Nm	A	B	H	h	h1	D	d1	Weight (g)
O470034.0001	O470034.TG5.501	34	180°	-	57	51	18	10,5	9	10,5	5,5	43
O47034.0001	O47034.T080G5.501N0.7	34	80°	0,7	57	51	18	10,5	9	10,5	5,5	43
O47034.0002	O47034.T080G5.501N1.1	34	80°	1.1	57	51	18	10,5	9	10,5	5,5	43
O47034.0003	O47034.T080G5.501N1.7	34	80°	1,7	57	51	18	10,5	9	10,5	5,5	43
O47034.0004	O47034.T115G5.501N0.7	34	115°	0,7	57	51	18	10,5	9	10,5	5,5	43
O47034.0005	O47034.T115G5.501N1.1	34	115°	1,1	57	51	18	10,5	9	10,5	5,5	43
O47034.0006	O47034.T115G5.501N1.7	34	115°	1,7	57	51	18	10,5	9	10,5	5,5	43
O47034.0007	O47034.T150G5.501N0.7	34	150°	0,7	57	51	18	10,5	9	10,5	5,5	43
O47034.0008	O47034.T150G5.501N1.1	34	150°	1,1	57	51	18	10,5	9	10,5	5,5	43
O47034.0009	O47034.T150G5.501N1.7	34	150°	1,7	57	51	18	10,5	9	10,5	5,5	43

15

REMOVABLE FLAT ZAMAK HINGE WITH THREADED STUD

Zamak hinges

Materials:

(1) Die-cast zamak alloy (zinc, aluminium and copper alloy).

Surface finish:

Smooth.

Colour:

(01) Black epoxy powder coated (RAL 9011).

(Z) Standard blue galvanising.



Inserts:

(2) Galvanised steel threaded stud (thread tolerance 6g).

(3) Stainless steel hinge pivot pin (Aisi 304).


(4) Stainless steel separating washer (Aisi 304) inserted between the two knuckles.

Assembly:

The hinge can be supplied for mounting doors that swing open to the right (DX/RH – enter the letter D at the end of the code); or for doors that swing open to the left (SX/LH – enter the letter S at the end of the code).

Special Requests:

None.

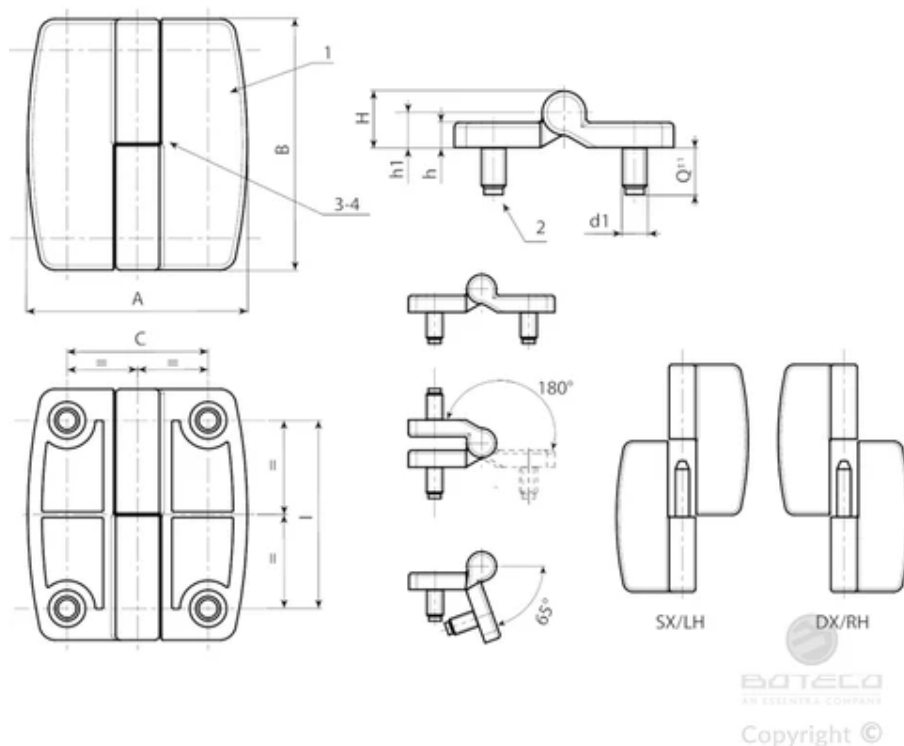

Black coated version code 01, final letter S at the end for Left version – final letter D for door opening to the right.

Code	Art.	C	I	A	B	h	H	h1	d1	g	Q	Weight (g)
O500045.0001	O500045.ZM08X1401D	45	60	70	80	8	18	11	M8		15	281
O500045.0002	O500045.ZM08X1401S	45	60	70	80	8	18	11	M8		15	281

Galvanised version code Z, final letter S at the end for Left version – final letter D for door opening to the right.

Code	Art.	C	I	A	B	h	H	h1	d1	g	Q	Weight (g)
O500045.0003	O500045.ZM08X14ZD	45	60	70	80	8	18	11	M8		15	281
O500045.0004	O500045.ZM08X14ZS	45	60	70	80	8	18	11	M8		15	281

ASYMMETRICAL FLAT ZAMAK HINGE WITH THREADED STUD

Zamak hinges

Materials:

(1) Die-cast zamak alloy (zinc, aluminium and copper alloy).

Surface finish:

Smooth.

Colour:

(01) Black epoxy powder coated (RAL 9011).

(Z) Standard blue galvanising.

Inserts:

(2) Galvanised steel threaded stud (thread tolerance 6g).


(3) Stainless steel hinge pivot pin (Aisi 304).

Special Requests:

None.



BOTECO
Copyright ©

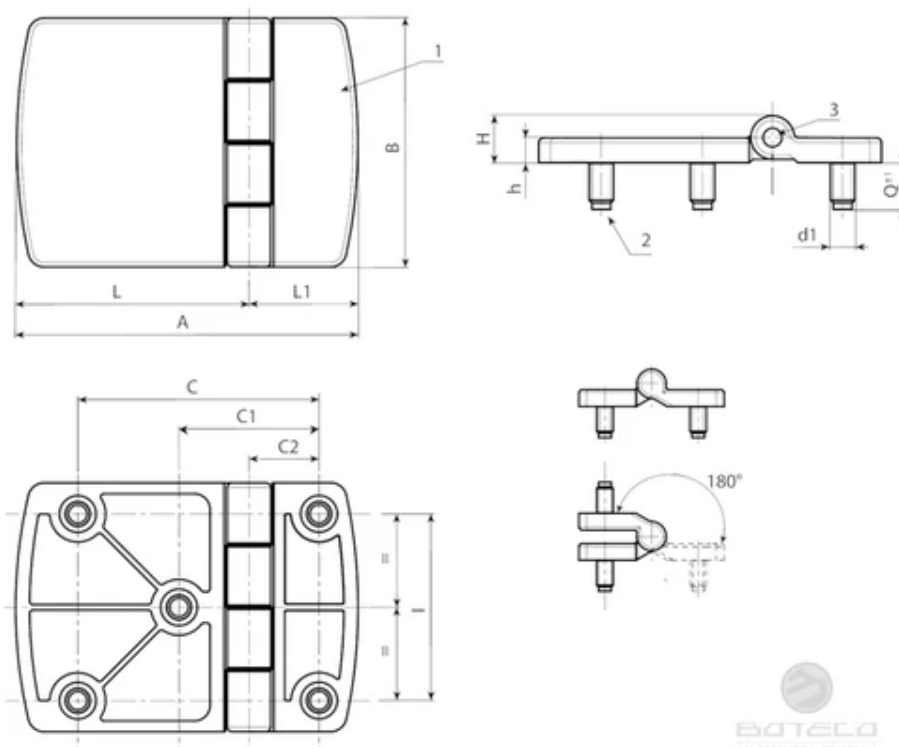

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Black coated version code 01 ending.

Code	Art.	C2	C1	C	I	A	B	L1	L	h	H	d1 6g	Q	Weight (g)
O505077.0001	O505077.ZM08X1401	22,5	45	77,5	60	110	80	35	75	8	15	M8	15	387

Galvanised version code Z ending.

Code	Art.	C2	C1	C	I	A	B	L1	L	h	H	d16g	Q	Weight (g)
O505077.0002	O505077.ZM08X14Z	22,5	45	77,5	60	110	80	35	75	8	15	M8	15	387

VERTICAL ZAMAK HINGE WITH EXTENSION

Zamak hinges

Materials:

(1-2) Die-cast zamak alloy (zinc, aluminium and copper alloy).

Surface finish:

Light sandblasting.

Colour:

(01) Black epoxy powder coated (RAL 9011).

(Z) Standard blue galvanising.

Inserts:

(3) Stainless steel hinge pivot pin (Aisi 304).

(4) Natural PA6 spacer bush.

EXTENSION:

The hinge can be supplied with the extension (5) included. In your order add the letter P to the end of the code.

Holes:

Through holes obtained by moulding. 90° countersunk hole for UNI 5933 – UNI 6109 screws.

Special Requests:

It is possible to order, separately, an additional thickness of 6 mm in black using code no. O51160.ZG05.0501; or a galvanised one using code no. O51160.ZG05.05Z.

ATTENZIONE: La cerniera viene spedita con la spina di rotazione non fissata, perchè per il montaggio sullo sportello deve essere tolta.



BOTECO
DE TORNARE CONTATTO
Copyright ©




BOTECO
DE TORNARE CONTATTO
Copyright ©



BOTECO
DE TORNARE CONTATTO
Copyright ©



BOTELCO
AN ESSENTIA COMPANY
Copyright ©

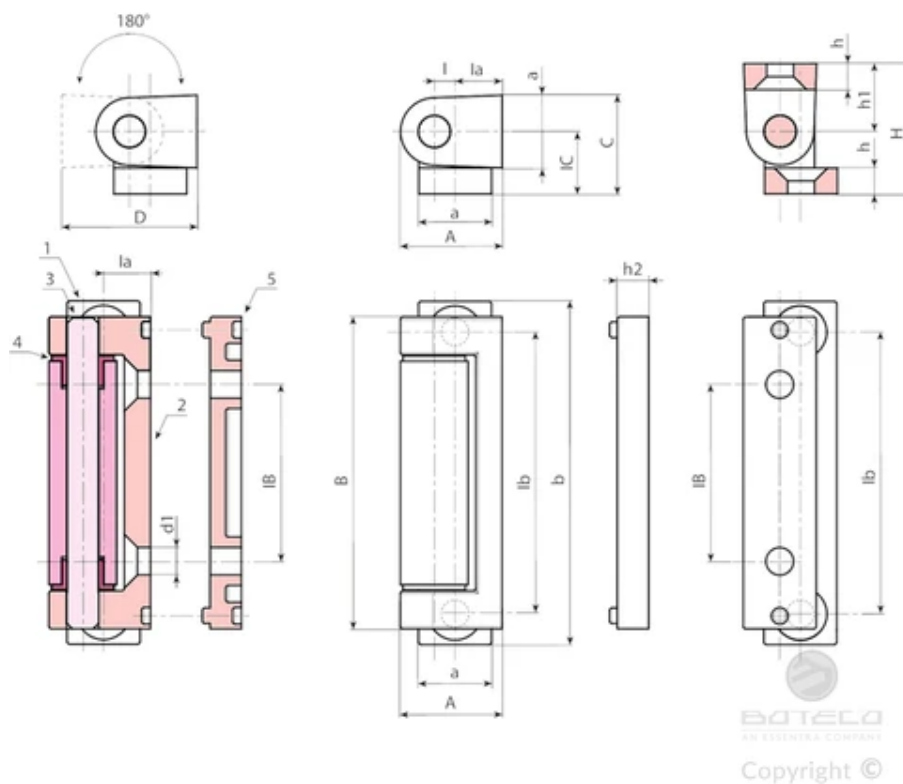

Black coated version code 01 ending

Code	Art.	lb	IB	A	a	B	b	C	D	I	h	h1	IC	la	d1	Weight (g)
O510054.0001	O510054.ZG05.501	54	34	19,5	14	60	66	19	24	4	5	13	12,5	9	5,3	100

Black coated version code 01 ending + extension (1/2)

Code	Art.	lb	IB	A	a	B	b	C	D	H	I	h	h1	IC	la	h2	d1
O510054.0002	O510054.ZG05.501P	54	34	19,5	14	60	66	19	24	25	4	5	13	12,5	9	6	5,3

Code	Art.	Weight (g)
O510054.0002	O510054.ZG05.501P	111

Galvanised version code Z ending

Code	Art.	lb	IB	A	a	B	b	C	D	I	h	h1	IC	la	d1	Weight (g)
O510054.0003	O510054.ZG05.5Z	54	34	19,5	14	60	66	19	24	4	5	13	12,5	9	5,3	100

Galvanised version code Z ending + extension (1/2)

Code	Art.	lb	IB	A	a	B	b	C	D	H	I	h	h1	IC	la	h2	d1
O510054.0004	O510054.ZG05.5ZP	54	34	19,5	14	60	66	19	24	25	4	5	13	12,5	9	6	5,3

Code	Art.	Weight (g)
O510054.0004	O510054.ZG05.5ZP	111

15

BASIC PUNCHED STEEL HINGE WITH THROUGH HOLES

Steel hinges

Materials:

(1) Steel punched and bent.

Surface finish:

Smooth.

Colour:

(01) Black epoxy powder coated (RAL 9011).

(Z) Standard blue galvanising.

Inserts:

(3) Stainless steel hinge pivot pin (Aisi 304).

(4) Natural PA6 separating washer inserted between the two knuckles.


Holes:

Through holes obtained by punching.

Special Requests:

None.



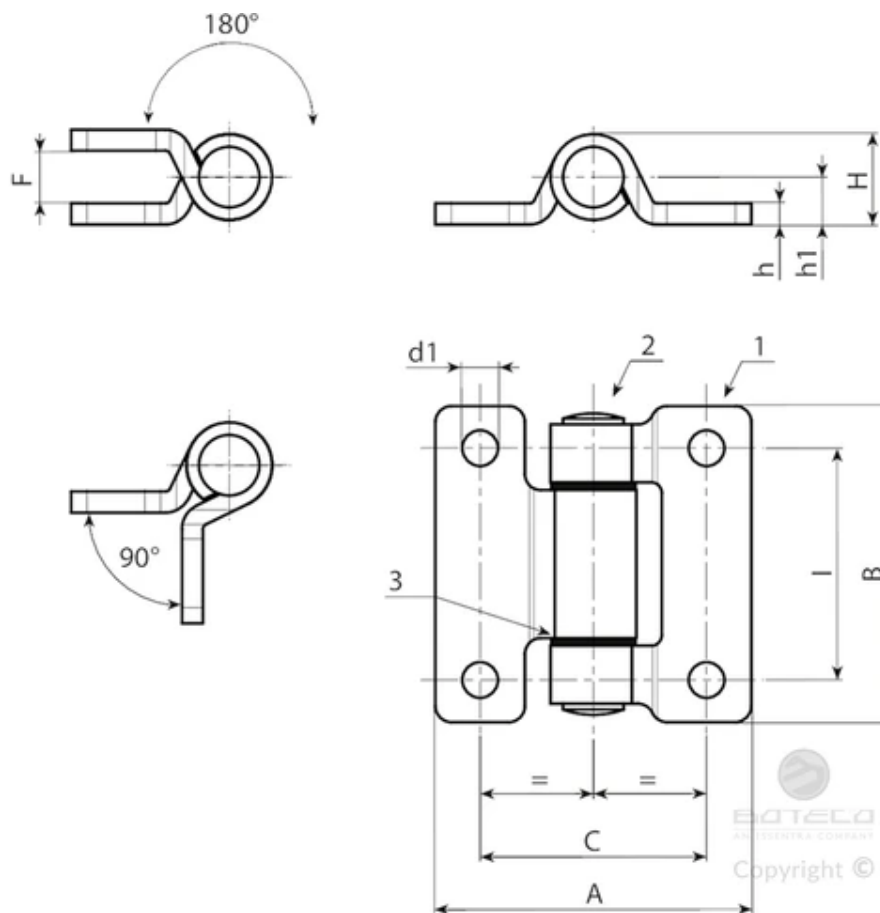

Black coated version code 01 ending.

Code	Art.	C	I	A	B	F	h	H	h1	d1	Weight (g)
O515040.0001	O515040.VG06.501	40	40	60	60	10	4	17	9	6,8	143

Galvanised version code Z ending.

Code	Art.	C	I	A	B	F	h	H	h1	d1	Weight (g)
O515040.0002	O515040.VG06.5Z	40	40	60	60	10	4	17	9	6,8	143

15

VERTICAL ZAMAK HINGE WITH SINGLE THREADED MOUNT

Zamak hinges

Materials:

(1-2) Die-cast zamak alloy (zinc, aluminium and copper alloy).

Surface finish:

Light sandblasting.

Colour:

(01) Black epoxy powder coated (RAL 9011).

(Z) Standard blue galvanising.

Inserts:

(3) Stainless steel hinge pivot pin (Aisi 304).


(4) Natural PA6 spacer bush.

Holes:

Female threaded holes M06 obtained by moulding.

Special Requests:

None.

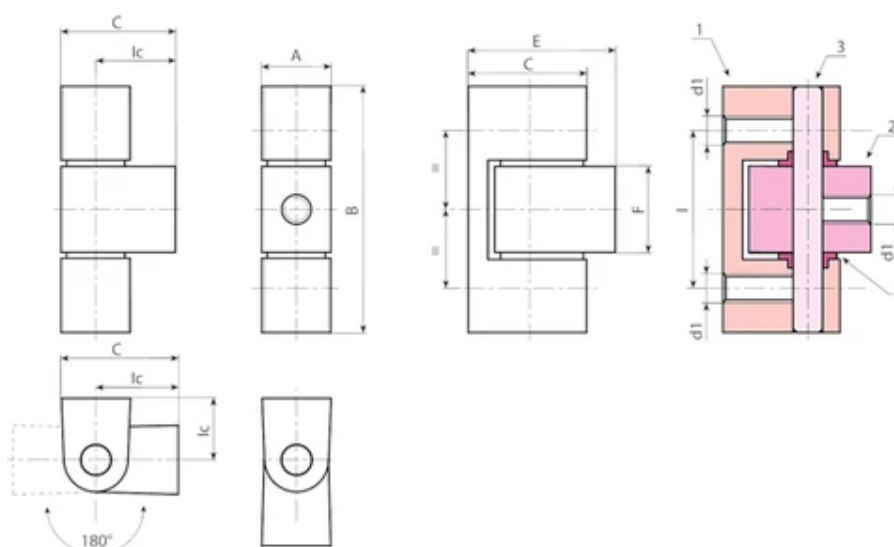

Black coated version code 01 ending

Code	Art.	I	Ic	A	B	C	E	F	d1	Weight (g)
O520032.0001	O520032.ZM0601	32	12	14	50	19	24	17.5	M6	78

Galvanised version code Z ending

Code	Art.	I	Ic	A	B	C	E	F	d1	Weight (g)
O520032.0002	O520032.ZM06Z	32	12	14	50	19	24	17.5	M6	78

BASIC VERTICAL LIFT-OFF HINGE

Zamak hinges

Materials:

(1-2) Die-cast zamak alloy (zinc, aluminium and copper alloy).

Surface finish:

Light sandblasting.

Colour:

(01) Black epoxy powder coated (RAL 9011).

(Z) Standard blue galvanising.

Inserts:


(3) 4 galvanised steel screws M05x06 with toothed lock washer.

(4) Black oxide treated spacer washer.

(5) Die-cast zamak pivot pin.

Special Requests:

Upon request and for special quantities (minimum 100 pieces) the hinge can be supplied with a stainless steel pivot pin (Aisi 304) (code O530019.ZM0501CIN).

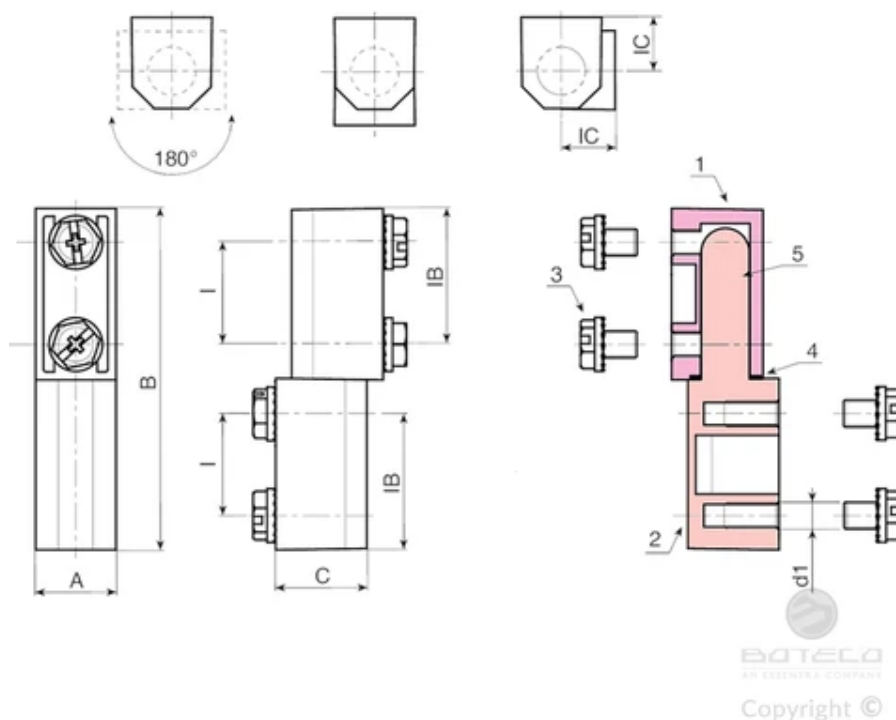

Black coated version code 01 ending

Code	Art.	I	IB	IC	A	B	C	d1	Weight (g)
O530019.0001	O530019.ZM0501	19	25,5	10	15	64,5	17	M5	86

Galvanised version code Z ending

Code	Art.	I	IB	IC	A	B	C	d1	Weight (g)
O530019.0005	O530019.ZM05Z	19	25,5	10	15	64,5	17	M5	86