

FEMALE CONNECTOR FOR WELDING MACHINE PANEL

Quick couplings DINS

Materials:

Phenolic resin.

Resistant to oils and greases.

Resistant to high temperatures.

Surface finish:

Glossy.

Colour:

Black (RAL 9011).

Inserts:

(1) Brass insert with female connector EN 60794:12.

(4) F25-00:

Black-oxyde treated steel toothed washer DIN 6798.

(4) F35-00:

Black-oxyde treated steel corrugated washer DIN 137.

(4) F70-95:

Black-oxyde treated steel corrugated washer DIN 137.

(5) Yellow passivated steel threaded hexagon ring nut.

(6) Black-oxide treated steel split washer UNI 1751.

(7) Yellow passivated steel washer.

(8) Yellow passivated hex head screw DIN933/UNI 5739.

Special Requests:



None.



BOTECO
Copyright ©



BOTECO
Copyright ©

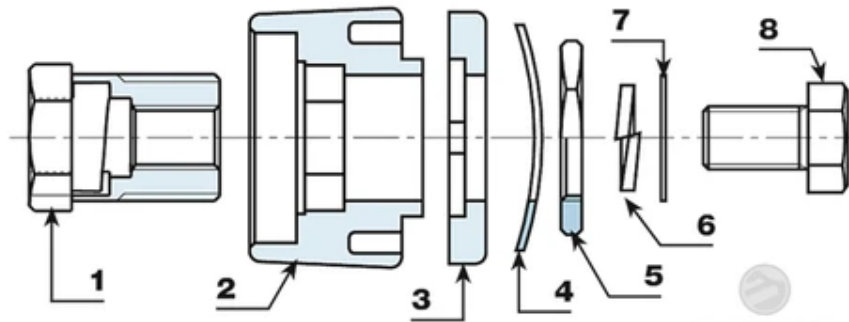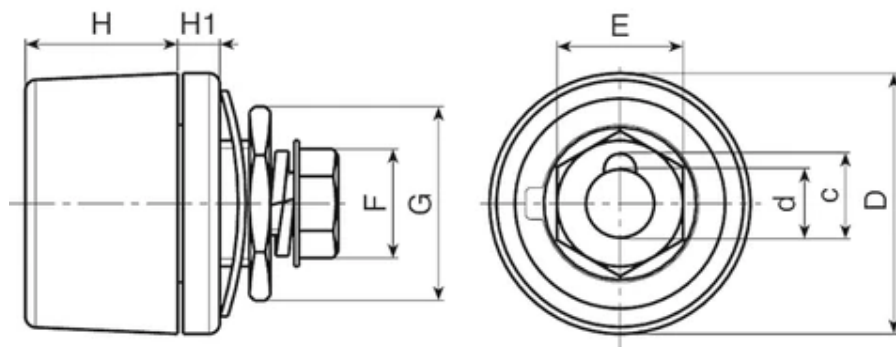

BOTELO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	D	H	H1	d	c	E	F	G	Weight (g)	Amp. Max
S111.0001	S111.F2500	33	14	4	9	11	14	13	22	50	200
S111.0008	S111.F3550	50.5	29	7	13	16	21	17	27	153	400
S111.0010	S111.F7095	50.5	29	7	13	16	24	19	32	202	500

S112



19

MALE CABLE CONNECTOR

Quick couplings DINS

Materials:

(4) Polypropylene and SBS rubber alloy, 75 Shore.
Resistant to oils and greases.

Surface finish:

Smooth.

Colour:

Black (RAL 9011).

Inserts:

- (1) Brass insert with male connector EN 60794:12.
- (2) Soft copper cable collector tube.
- (3) Hexagon socket grub screw DIN 913-45H (for version M95-00 no. 2 grub screws).

Special Requests:

None.



BOTECO
BY BOUTECOM COMPANY
Copyright ©





BOTECO
BY BOUTECOM COMPANY
Copyright ©



BOTECO
BY BOUTECOM COMPANY
Copyright ©



BOTECO
AN ESSENTIA COMPANY
Copyright ©

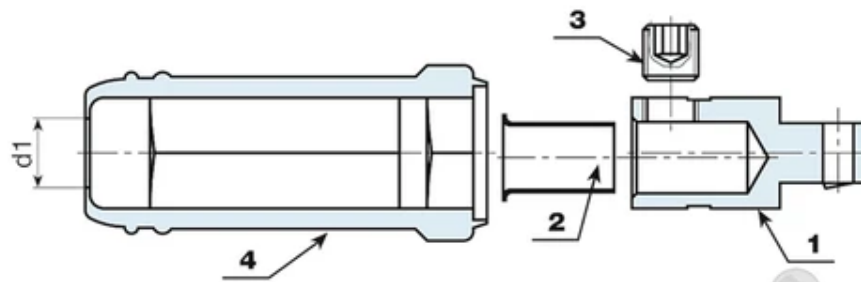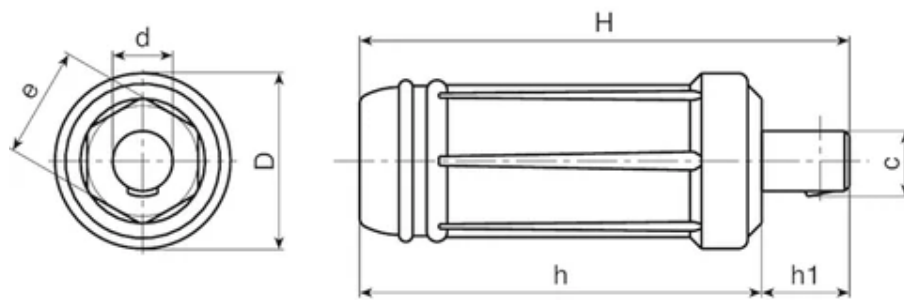

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	D	H	h	h1	d	c	e	d1	Weight (g)	Amp. Max
S112.0001	S112.M2500	24.5	70	59	11	9	10	14	8.5	37	200
S112.0003	S112.M3550	35	106	87	19	13	14.5	21	11	130	250
S112.0004	S112.M7000	38	106	87	19	13	14.5	24	15.5	148	400
S112.0006	S112.M9500	38	106	87	19	13	14.5	24	15.5	200	500

FEMALE CABLE CONNECTOR

Quick couplings DINS

Materials:

(4) Polypropylene and SBS rubber alloy, 75 Shore.
Resistant to oils and greases.

Surface finish:

Smooth.

Colour:

Black (RAL 9011).

Inserts:

- (1) Brass insert with female connector EN 60794:12.
- (2) Soft copper cable collector tube.
- (3) Hexagon socket grub screw DIN 913-45H (for version F95-00 no. 2 grub screws).

Special Requests:

None.



BOTECO
BY BOTTRECH COMPANY
Copyright ©




BOTECO
BY BOTTRECH COMPANY
Copyright ©



BOTECO
BY BOTTRECH COMPANY
Copyright ©



BOTECO
AN ESSENTIA COMPANY
Copyright ©

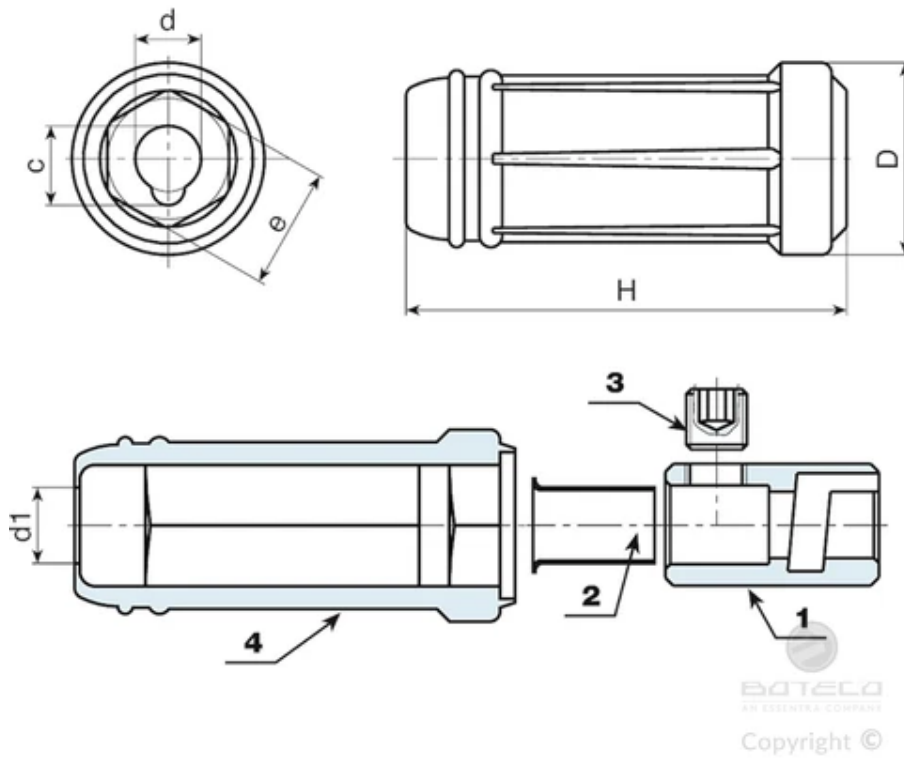

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	D	H	d	c	e	d1	Weight (g)	Amp. Max
S113.0001	S113.F2500	24.5	59	9	10.5	14	8.5	38	200
S113.0002	S113.F3550	35	87	13	16	21	11	104	250
S113.0003	S113.F7000	38	87	13	16.5	24	15.5	151	400
S113.0004	S113.F9500	38	87	13	16	24	15.5	188	500

S114



19

MALE CONNECTOR FOR PANEL

Quick couplings DINS

Materials:

Phenolic resin.

Resistant to oils and greases.

Resistant to high temperatures.

Surface finish:

Glossy.

Colour:

Black (RAL 9011).

Inserts:

(1) Brass insert with male connector UNI.

(4) F25-00:

Black-oxyde treated steel toothed washer DIN 6798.

(4) F35-00:

Black-oxyde treated steel corrugated washer DIN 137.

(4) F70-95:

Black-oxyde treated steel corrugated washer DIN 137.

(5) Yellow passivated steel threaded hexagon ring nut.

(6) Black-oxide treated steel split washer UNI 1751.

(7) Yellow passivated steel washer.

(8) Yellow passivated hex head screw DIN933/UNI 5739.

Special Requests:



None.



BOTECO
Copyright ©



BOTECO
Copyright ©

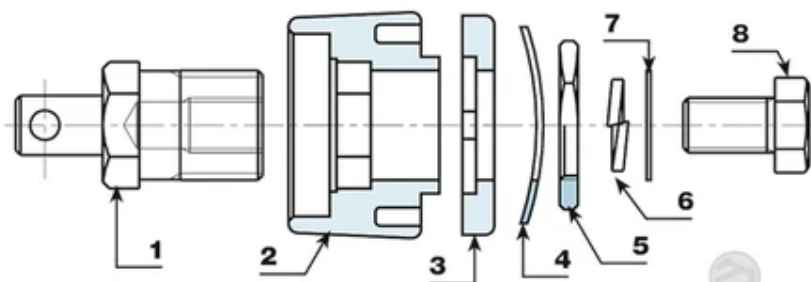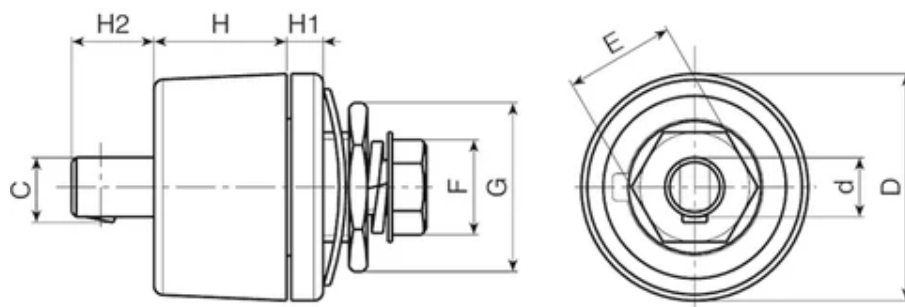

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	D	H	H1	H2	d	c	E	F	G	Weight (g)	Amp. Max
S114.0001	S114.M2500	33	14	4	7	9	9.5	14	13	22	60	200
S114.0002	S114.M3550	50.5	29	7	9	13	14	21	17	27	194	400
S114.0003	S114.M7000	50.5	29	7	9	13	14	24	19	32	242	500

FEMALE CONNECTOR FOR PANEL TP (SUITABLE FOR INVERTER ONLY)

Quick couplings DINS

Materials:

(2-3) Phenolic resin.

Resistant to oils and greases.

Resistant to high temperatures.

Surface finish:

Glossy.

Colour:

Black (RAL 9011).

Inserts:

(1) Brass insert with female connector UNI.

(4) Black-oxide treated steel corrugated washer DIN 137.

(5) Yellow passivated steel threaded hexagon ring nut.

(6) Black-oxide treated steel split washer UNI 1751.

(7) Yellow passivated steel washer.



(8) Yellow passivated hex head screw DIN933/UNI 5739.

Special Requests:

None.



BOTECO
Copyright ©

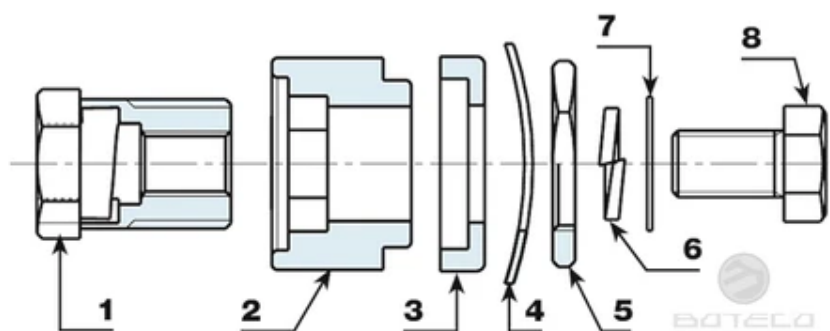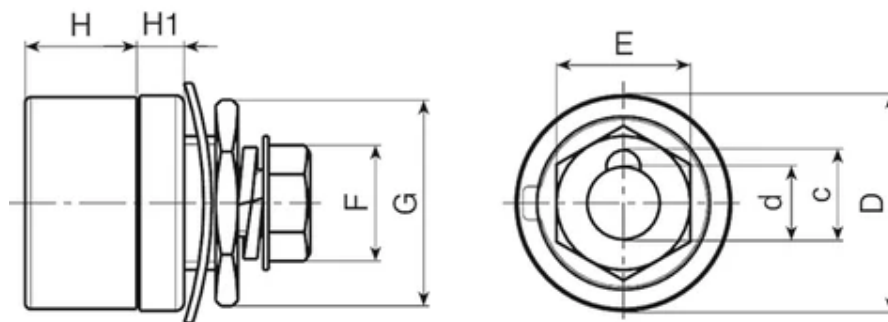

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	D	H	H1	d	c	E	F	G	Weight (g)	Amp. Max
S119.0001	S119.F3550	38	20	8	13	16	21	17	27	121	200

19

MALE CONNECTOR FOR PANEL TP (SUITABLE FOR INVERTER ONLY)

Quick couplings DINS

Materials:

(2-3) Phenolic resin.

Resistant to oils and greases.

Resistant to high temperatures.

Surface finish:

Glossy.

Colour:

Black (RAL 9011).

Inserts:

(1) Brass insert with male connector UNI.

(4) Black-oxide treated steel corrugated washer DIN 137.

(5) Yellow passivated steel threaded hexagon ring nut.

(6) Black-oxide treated steel split washer UNI 1751.


(7) Yellow passivated steel washer.

(8) Yellow passivated hex head screw DIN933/UNI 5739.

Special Requests:

None.



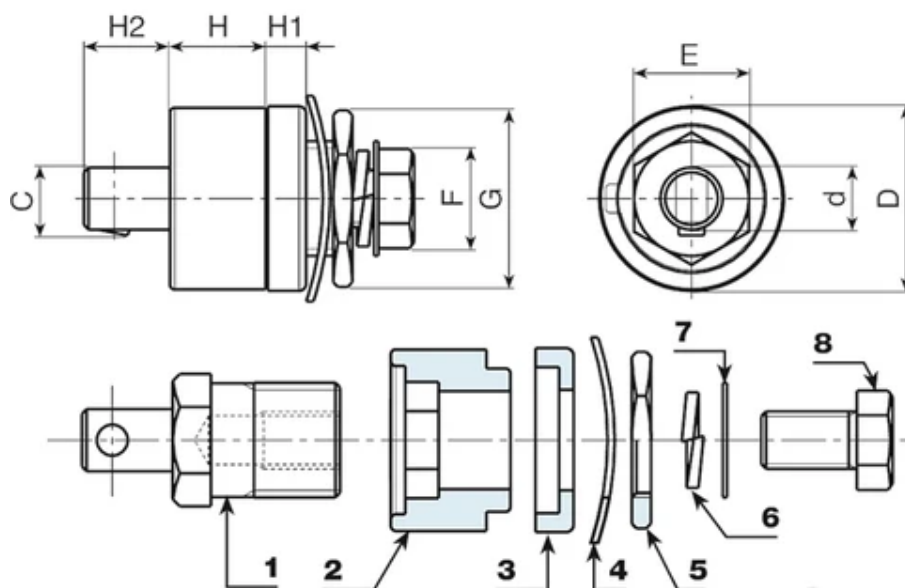

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	D	H	H1	H2	d	c	E	F	G	Weight (g)	Amp. Max
S120.0001	S120.M3550	38	20	8	17	13	14	21	17	27	160	200

SHORT-NECK WASHER PAIR

Insulating washers

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Smooth.

Colour:

Black (RAL 9011).

Hole:


Smooth through hole obtained by moulding the plastic.

Special Requests:

None.




BOTECO
AN ESSENTIA COMPANY
Copyright ©

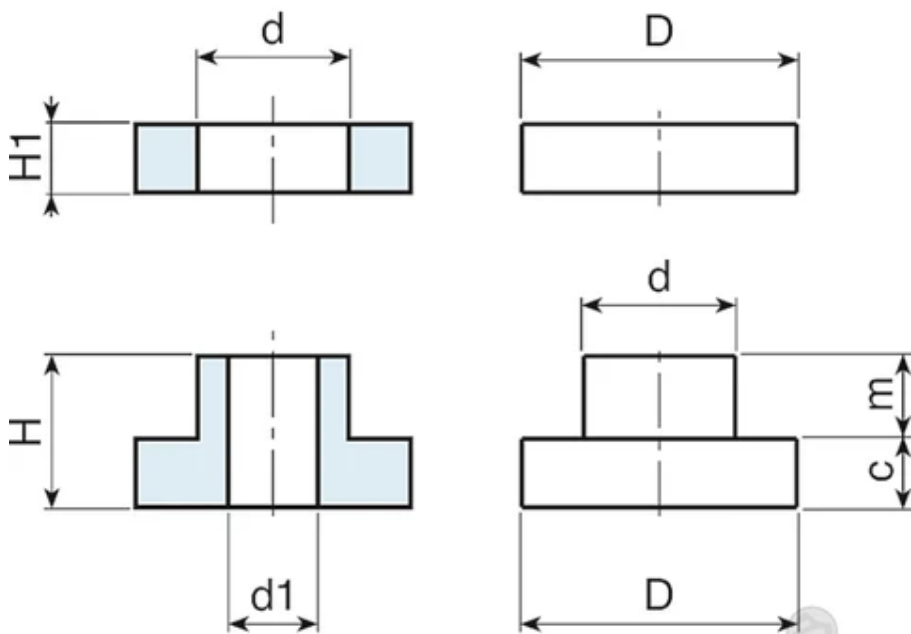

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	D	H	d	H1	m	c	d1	Weight (g)
S22820C.0001	S22820C.TG06	20	11	11	5	6.5	4.5	6.5	9

S229



19

INSULATING WASHER PAIR

Insulating washers

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Smooth.

Colour:

Black (RAL 9011).

Hole:


Smooth through hole obtained by moulding the plastic.

Special Requests:

None.




BOTECO
AN ESSENTIA COMPANY
Copyright ©

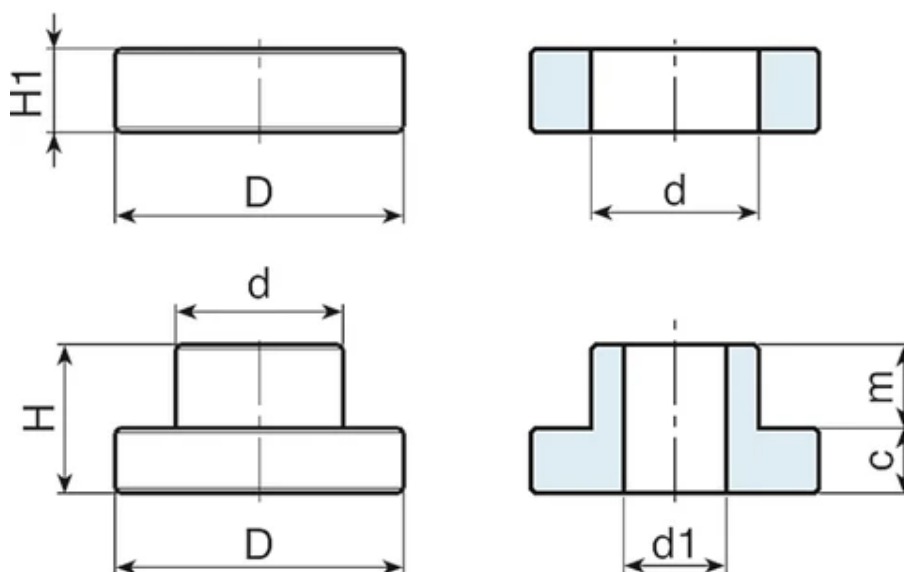

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	D	H	d	H1	m	c	d1	Weight (g)
S22931C.0001	S22931C.TG10	31	16	17,5	8.5	9	7	10.5	13

S599



19

PANEL CABLE CLAMP

Various accessories for welding machines

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Hole:


Smooth through hole obtained by moulding the plastic.

Special Requests:

None.



BOTECO
Copyright ©

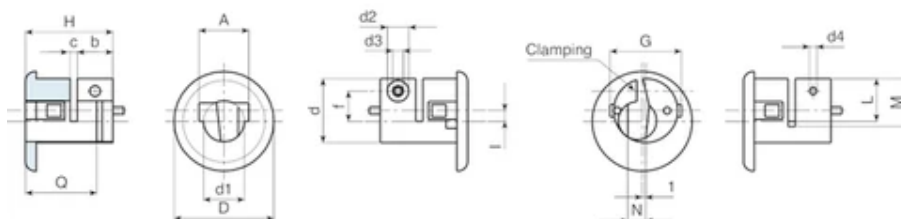

Code	art.	D	H	d	d1	d2	d3	d4	A	b	c	f	G	I	L	M	N
S59928.0001	S59928.T01	28	25	18	11.5	6	3	2	14	10	2	8.5	20	3	12	15	5

Code	art.	Q	Weight (g)
S59928.0001	S59928.T01	13	65

CABLE CLAMP WITH HEXAGONAL RING NUT

Various accessories for welding machines

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:


Black (RAL 9011).

Hole:

Smooth through hole obtained by moulding the plastic.

Special Requests:


None.

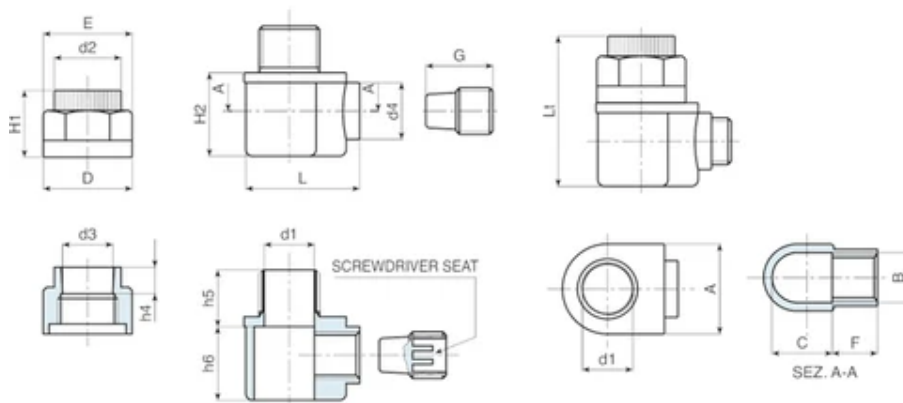

Code	art.	B	C	D	E	F	G	L	H1	H2	h4	h5	h6	d1	d2	d3	d4
S60038.0001	S60038.TG1001	M14	17.5	26	23	14.5	19	34.5	20	22	7	16.5	19	10.5	19	14	17
S60038.0002	S60038.TG1101	M14	17.5	26	23	14.5	19	34.5	20	22	7	16.5	19	11.5	19	14	17
S60038.0003	S60038.TG1401	M14	17.5	26	23	14.5	19	34.5	20	22	7	16.5	19	14.5	19	14	17

Code	art.	Lt	Weight (g)
S60038.0001	S60038.TG1001	43	13
S60038.0002	S60038.TG1101	43	13
S60038.0003	S60038.TG1401	43	13

S601



19

BUMPER CAP (FIXED BASE FOOT)

Various accessories for welding machines

Materials:

Glass fiber reinforced polypropylene

Resistant to oils and greases.

Surface finish:

Smooth.

Colour:

Black (RAL 9011).

Hole:




Smooth through hole obtained by moulding the plastic.

Special requests:

None.




BOTECO
AN ESSENTIA COMPANY
Copyright ©

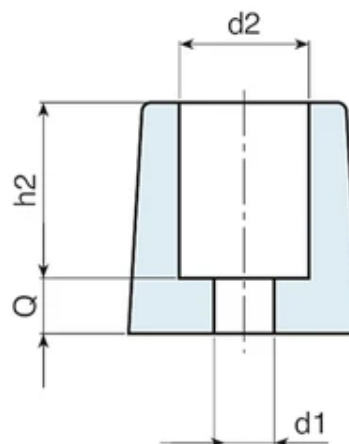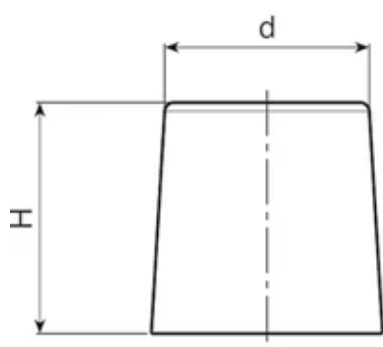

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	D	H	d	d2	h2	Q	d1	Weight (g)
S60122.0001	S60122.E01	23,5	18	21,5	11	8,5	9.5	4	13
S60125.0001	S60125.D01	25	25	22	14	19	6.5	6.5	17

S602TG10



19

SPOOL HOLDER WITHOUT STUD FOR MIG/MAG WELDING WIRE COIL

MIG reels accessories

Materials:

(1-3-4-6) Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

(2) Galvanised steel spring.

(5) Galvanised steel insert with threaded holes.

(7) Thermoplastic TPV rubber washer, 75 Shore.

(8) Galvanised steel washer.

(9) Galvanised steel hexagon head screw, left-hand/right-hand thread. The choice must be made according to the motor rotation direction of the wire feeder.

Special requests:

For customers using spool holder S602116 who want to mount a wire coil with width $Q=55$, plastic adapter S604 can be provided upon request. To be ordered separately.

Upon request, adapter S816 can be supplied for metal coils without internal frame. To be ordered separately.




BOTECO
BY FINDER GROUP
Copyright ©




BOTECO
BY FINDER GROUP
Copyright ©




BOTECO
BY FINDER GROUP
Copyright ©

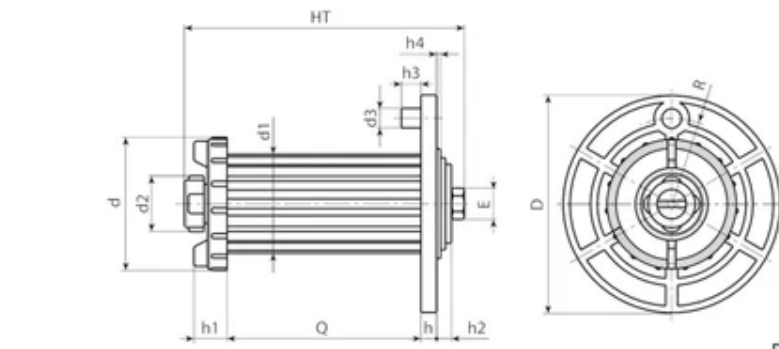

BOTECO
AN ESSENTIA COMPANY
Copyright ©

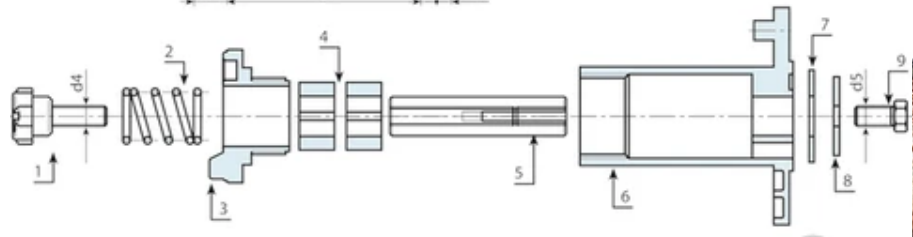


BOTECO
AN ESSENTIA COMPANY
Copyright ©

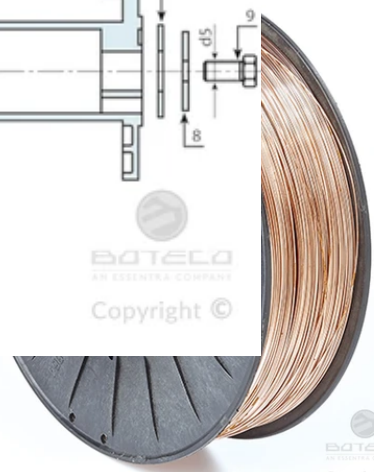

BOTECO
AN ESSENTIA COMPANY
Copyright ©



BOTECO
AN ESSENTIA COMPANY
Copyright ©

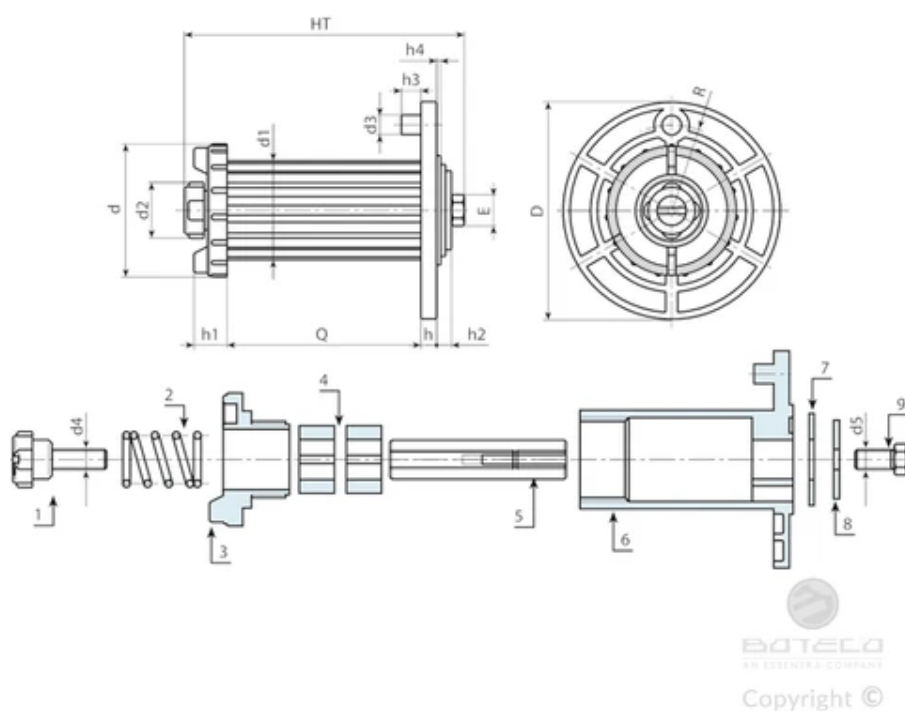

Version for plastic coil with hole: Ø 53 mm - width 55 mm (1/2)

Code	art.	D	HT	d	d1	d2	d3	d4	d5	h	h1	h2	h3	h4	E	Q	R
S602074.0001	S602074.TG10X1001DX	112	102	68	50.5	28	10	M10 DX	M10 DX	9	17	8	7	1.7	13	55	44
S602074.0002	S602074.TG10X1001SX	112	102	68	50.5	28	10	M10 DX	M10 SX	9	17	8	7	1.7	13	55	44


Code	art.	Weight (g)
S602074.0001	S602074.TG10X1001DX	350
S602074.0002	S602074.TG10X1001SX	350

Version for plastic coil with hole: Ø 53 mm - width 100 mm (1/2)

Code	art.	D	HT	d	d1	d2	d3	d4	d5	h	h1	h2	h3	h4	E	Q	R
S602116.0001	S602116.TG10X1001DX	112	140	68	50.5	28	10	M10 DX	M10 DX	9	17	8	7	1.7	17	99	44
S602116.0002	S602116.TG10X1001SX	112	140	68	50.5	28	10	M10 DX	M10 SX	9	17	8	7	1.7	17	99	44

Code	art.	Weight (g)
S602116.0001	S602116.TG10X1001DX	545
S602116.0002	S602116.TG10X1001SX	545

S602TG50



19

SPOOL HOLDER WITH STUD FOR MIG/MAG WELDING WIRE COIL

MIG reels accessories

Materials:

(1-3-4-6) Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

(2) Galvanised steel spring.

(5) Galvanised steel insert with threaded holes.

(7) Thermoplastic TPV rubber washer, 75 Shore.

(8) Galvanised steel washer.

(9) Galvanised steel hexagon head screw, left-hand/right-hand thread. The choice must be made according to the motor rotation direction of the wire feeder.

(10) Galvanized steel smooth stud.


Special requests:

Upon request, adapter S816 can be supplied for metal coils without internal frame. To be ordered separately.






BOTELO
DE TENDERS COMPANY
Copyright ©

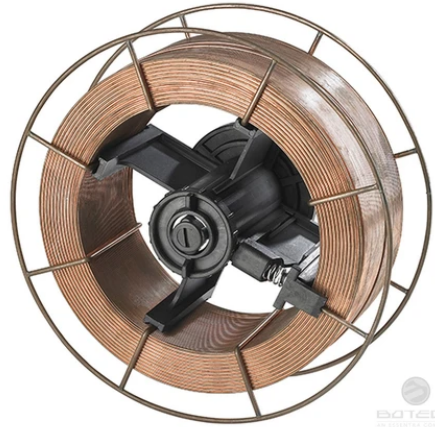



BOTELO
DE TENDERS COMPANY
Copyright ©




BOTELO
DE TENDERS COMPANY
Copyright ©




BOTELO
DE TENDERS COMPANY
Copyright ©

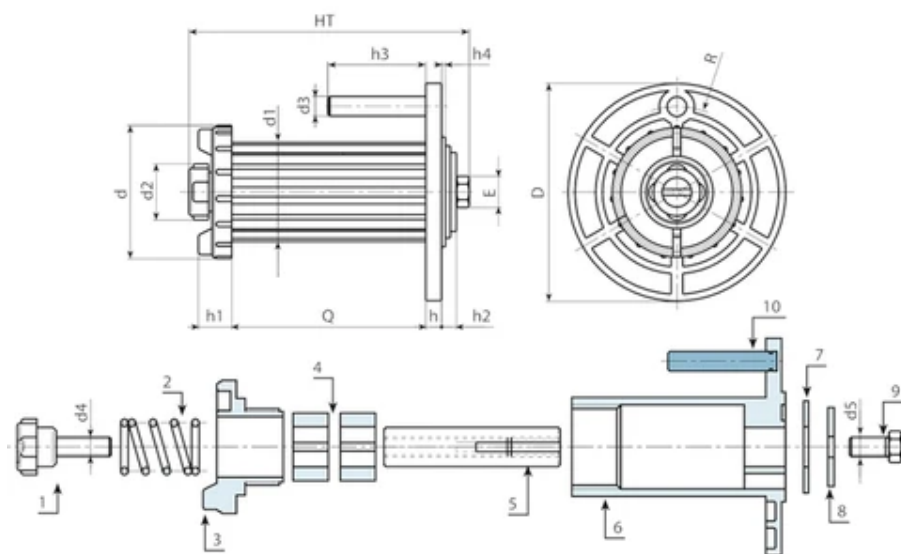

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	D	HT	d	d1	d2	d3	d4	d5	h	h1	h2	h3	h4	E	Q	R
S602116.0015	S602116.TG10X5001DX	112	140	68	50.5	28	10	M10 DX	M10 DX	8	17	8	50	1.7	17	99	44
S602116.0016	S602116.TG10X5001SX	112	140	68	50.5	28	10	M10 DX	M10 SX	8	17	8	50	1.7	17	99	44

Code	art.	Weight (g)
S602116.0015	S602116.TG10X5001DX	550
S602116.0016	S602116.TG10X5001SX	550

S603



19

SNAP-FIT SPOOL HOLDER FOR WELDING WIRE

MIG reels accessories

Materials:

(1-2) Reinforced polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

(3-8) Galvanised steel left-hand threaded nut.
(4) Galvanised steel washer.
(5-7) Black oxide treated steel spring washer.
(6) Insert with galvanised steel threaded studs.


Special Requests:

None.

ATTENTION:

Spool holder S603 can only be used with plastic or iron spools with internal frame diameter d. 53 mm and width 100 mm.



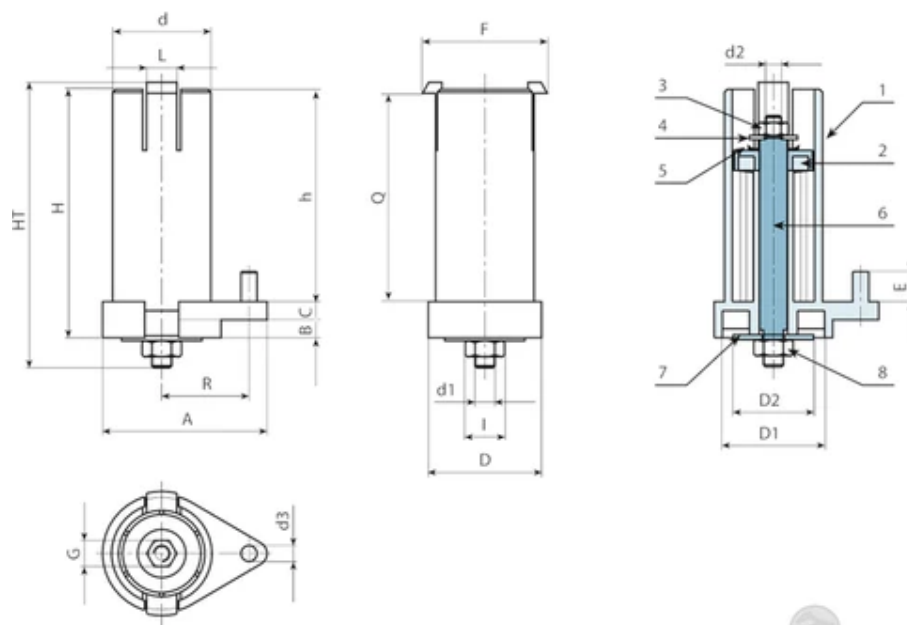


BOTELO
 AN ESSENTIA COMPANY
 Copyright ©

Code	art.	D	D1	D2	HT	H	d	d1	d2	d3	h	A	B	C	E	F	G
S603118.0001	S603118.T01	60	51	40	137	118	50	M10 SX	M8 SX	8	107	82	3	9	15	63	13
S603124.0001	S603124.T01	60	51	40	145	124	50	M10 SX	M8 SX	8	107	82	9	9	15	63	13

Code	art.	I	L	Q	R	Weight (g)
S603118.0001	S603118.T01	17	15	104	43.5	295
S603124.0001	S603124.T01	17	15	104	43.5	315

ROTARY SUPPORT FOR WIRE FEEDER HEAD (THREE-PHASE MIG/MAG WELDERS)

MIG reels accessories

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Hole:

Smooth through hole obtained by moulding the plastic.

Special requests:

You can order the two components separately, and their codes are:

>Top flange: S804.T01


>Low cylinder H=65:S800060.T01

>Middle cylinder H=95:S800086.T01

>High cylinder H=125:S800125.T01



BOTECO
BY INVENTIA COMPANY
Copyright ©

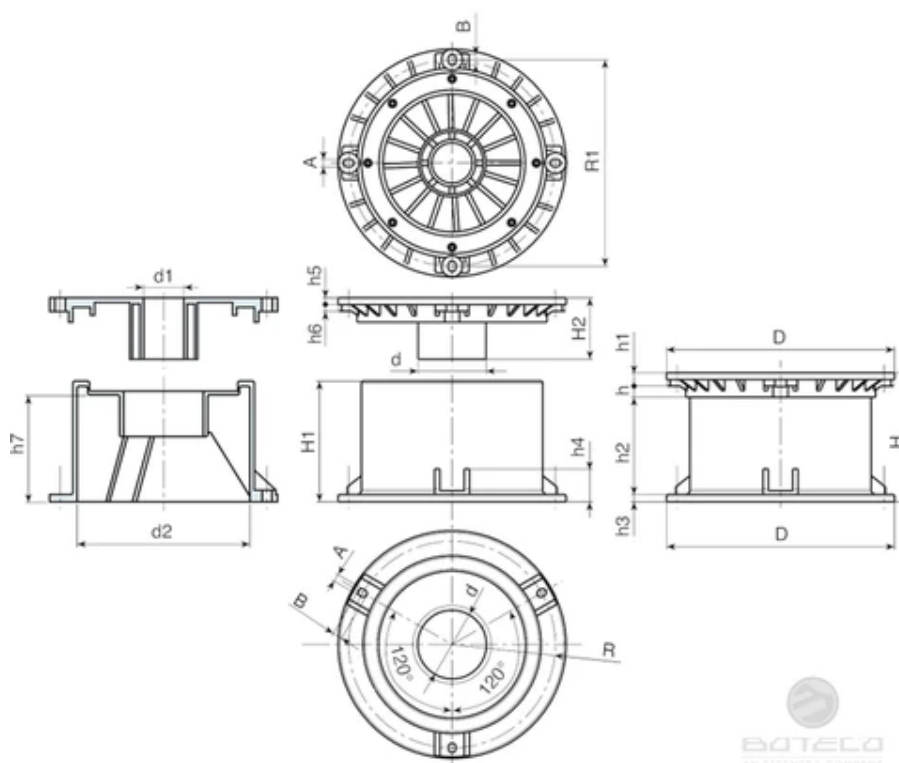

BOTECO
BY INVENTIA COMPANY
Copyright ©

Code	art.	D	H	H1	H2	d	d1	d2	h	h1	h2	h3	h4	h5	h6	h7	R
S802065.0001	S802065.T01	218	66	56,5	58	64,5	38	163	10	13	36	7	31	6,5	6,5	41,5	195
S802095.0001	S802095.T01	218	96,5	87	58	64,5	38	163	10	13	66,5	7	31	6,5	6,5	72	195
S802125.0001	S802125.T01	218	124	114,5	58	64,5	38	163	10	13	94	7	31	6,5	6,5	99,5	195

Code	art.	R1	A	B	Weight (g)
S802065.0001	S802065.T01	195	7	9	1000
S802095.0001	S802095.T01	195	7	9	1115
S802125.0001	S802125.T01	195	7	9	1250

S816



19

ADAPTER FOR METAL COILS WITHOUT INTERNAL FRAME FOR MIG/MAG WELDERS

MIG reels accessories

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Hole:

Smooth through hole obtained by moulding the plastic.

Spring:

Galvanized steel spring for coil release safety mechanism.

Special Requests:


None.



BOTECO
Copyright ©




BOTELO
AN INNOVATIVE COMPANY
Copyright ©

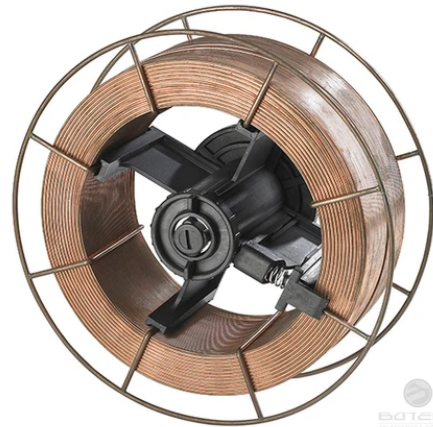



BOTELO
AN INNOVATIVE COMPANY
Copyright ©




BOTELO
AN INNOVATIVE COMPANY
Copyright ©





BOTELO
AN INNOVATIVE COMPANY
Copyright ©

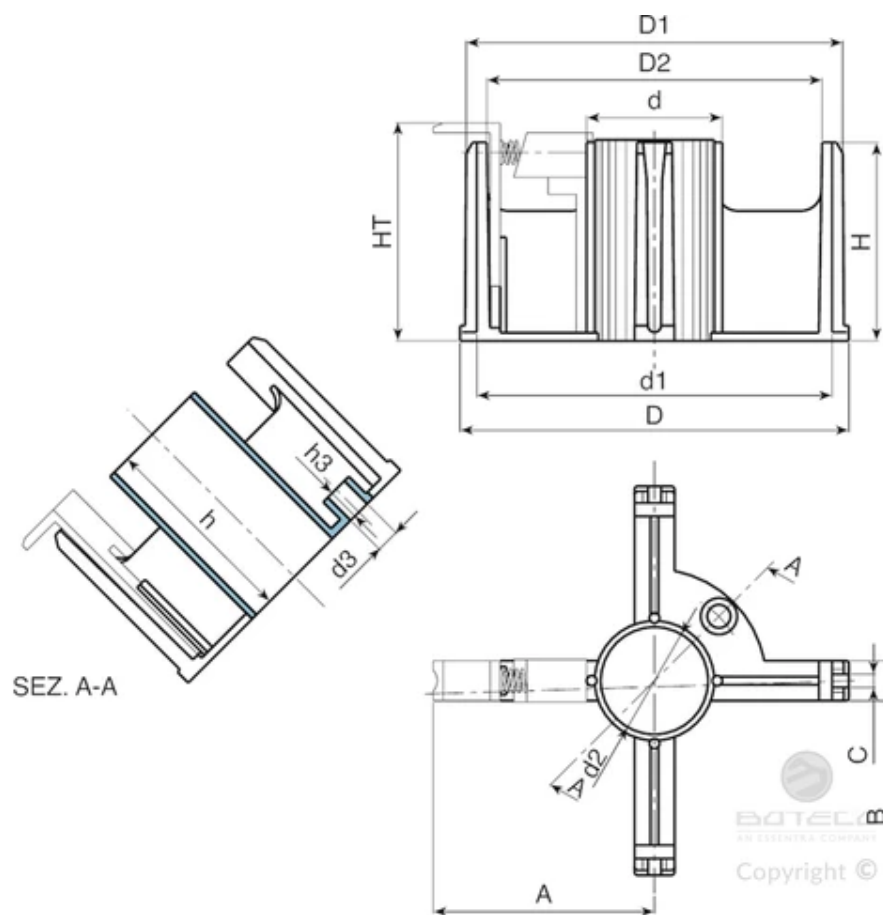

Code	art.	D	HT	D1	D2	d	d1	d2	d3	H	h	h3	A	B	C	Weight (g)
S816.0001	S816.T01	192	108	187	166	67	175.5	53	11.5	98	99	16	110	17.5	6.5	290

S860



19

TORCH CONNECTOR FRONT PROTECTION

Various accessories for welding machines

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:


Black (RAL 9011).

Hole:

Smooth through hole obtained by moulding the plastic.

Special Requests:

None.

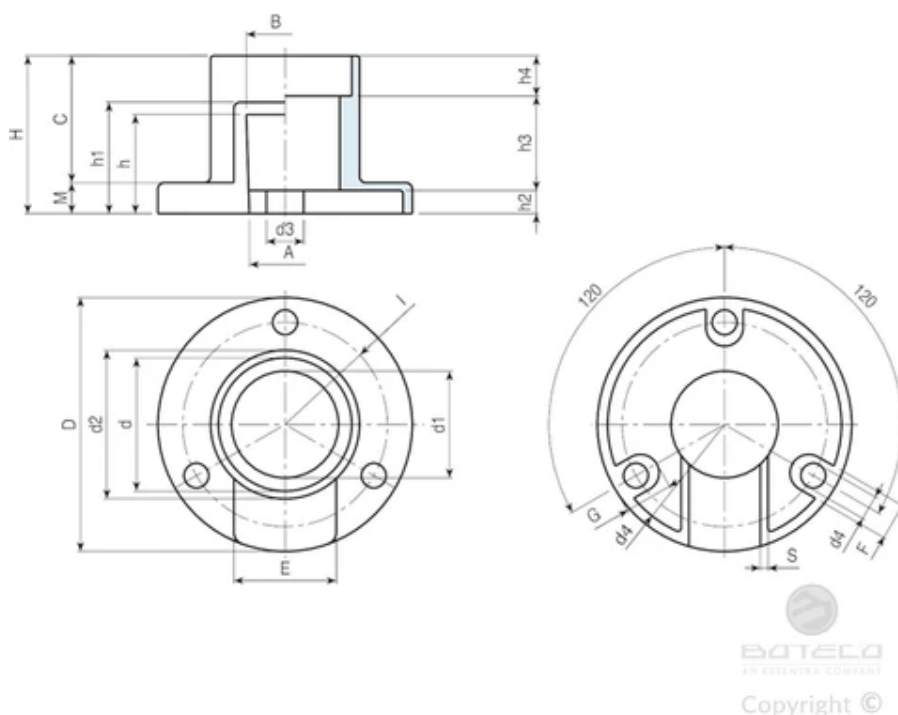

Code	art.	D	H	A	B	C	E	F	G	I	M	S	h	h1	h2	h3	h4
S860.0001	S860.T01	82	51	23	25	41	34.5	12	15.5	33	10	2.5	32	36	7.5	30.5	13

Code	art.	d	d1	d2	d3	d4	Weight (g)
S860.0001	S860.T01	43	34.5	50	12	8	65