

15

FLAT HINGE WITH THREADED STUD

Plastic hinges with threaded inserts

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.


Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin.

Galvanised steel threaded stud (thread tolerance 6g).

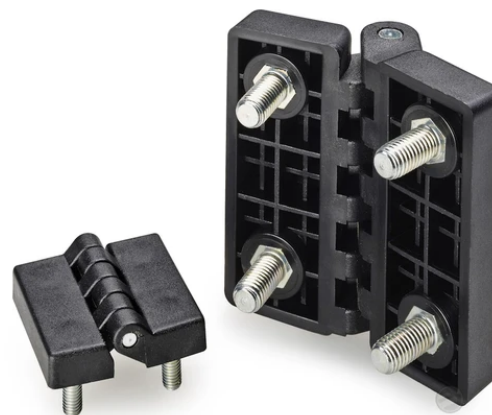


BOTECO
Copyright ©

Special Requests:

Upon request and for special quantities inserts can be supplied in different materials.

Upon request and for special quantities available in the colours indicated in the chart.

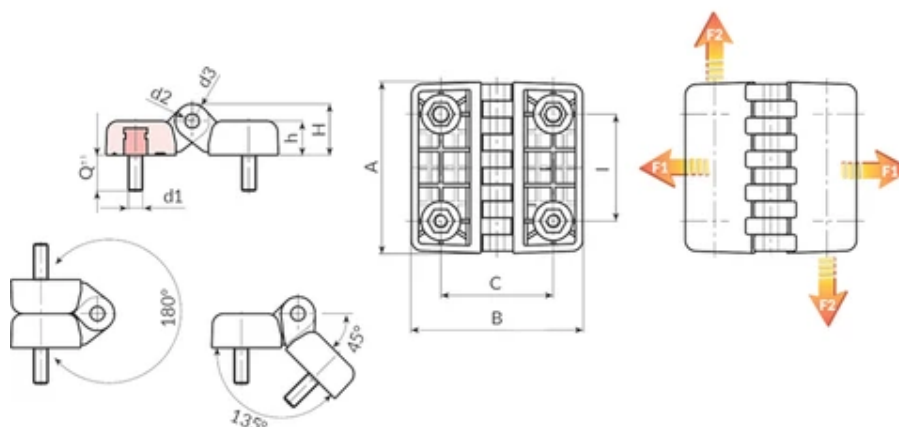

BOTECO
AN ESSENTIA COMPANY
Copyright ©

Code	art.	I	C	A	B	h	H	d2	d3	d1 6g	Q	Weight (g)	F1(N)	F2(N)
O43130.0001	O43130.TM05X1501	30	30	48	48	10.5	15.5	5	10	M5	15	49	1780	1370
O43130.0002	O43130.TM06X1501	30	30	48	48	10.5	15.5	5	10	M6	15	52	1780	1370
O43140.0001	O43140.TM06X2001	40	40	64	64	13	19	5	12	M6	20	90	4120	1760
O43140.0003	O43140.TM08X2001	40	40	64	64	13	19	5	12	M8	20	100	4120	1760
O43160.0001	O43160.TM08X2001	60	63	96	96	19	28.5	8	19	M8	20	260	4900	1275
O43160.0002	O43160.TM10X2001	60	63	96	96	19	28.5	8	19	M10	20	278	4900	1275