

15

## UNIVERSAL HINGE WITH THREADED INSERT TO MOUNT STRAIGHT DOOR

Plastic hinges with threaded inserts

### Materials:

Reinforced polyamide.

Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).

### Inserts:

Galvanised steel pin.

Brass insert with female threaded hole (thread tolerance 6H).


(\*) Galvanised steel insert with female threaded hole (thread tolerance 6H).

### Special Requests:

None.



BOTECO  
Copyright ©

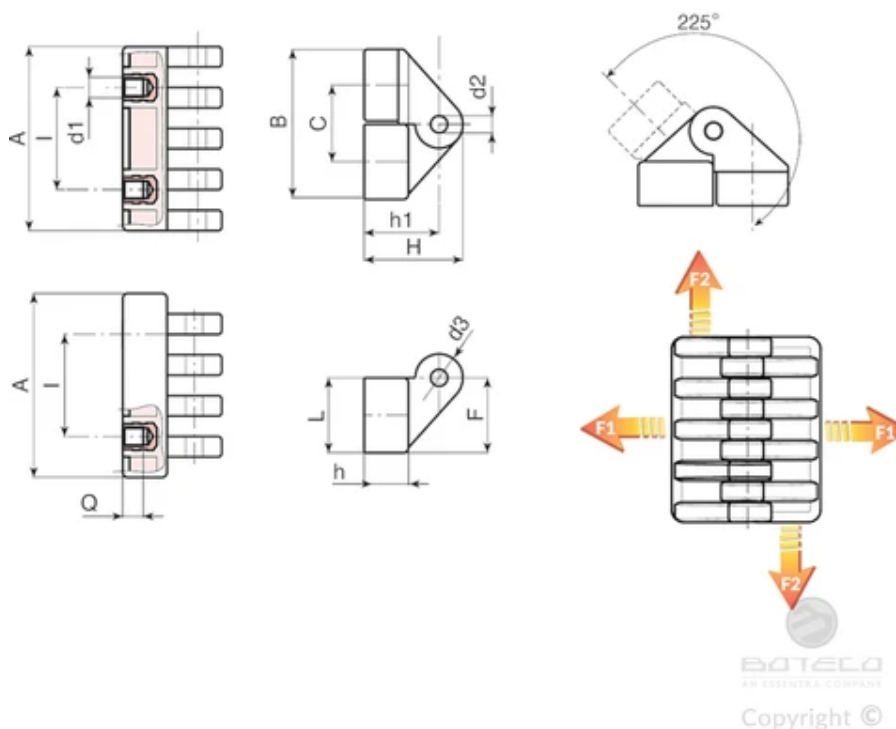

| Code        | art.          | I  | C    | A  | L    | B  | F    | h    | h1   | H    | d2 | d3 | d16H   | Q | Weight (g) | F1(N) | F2(N) |
|-------------|---------------|----|------|----|------|----|------|------|------|------|----|----|--------|---|------------|-------|-------|
| O45030.0001 | O45030.TM0501 | 15 | 18   | 30 | 17   | 35 | 17,5 | 11   | 19   | 24,5 | 4  | 11 | M5     | 6 | 26         | 1180  | 1130  |
| O45054.0001 | O45054.TM0601 | 30 | 22,5 | 54 | 21,5 | 44 | 22   | 13   | 22,5 | 30   | 5  | 15 | M6     | 7 | 58         | 1520  | 2980  |
| O45078.0001 | O45078.TM0801 | 42 | 31   | 78 | 30   | 61 | 30,5 | 18,5 | 31,5 | 42,5 | 8  | 22 | (*) M8 | 9 | 178        | 885   | 2875  |