

## FERRITE ROUND DISC MAGNET WITH GALVANISED STEEL SHELL AND THREADED STUD

Ferrite magnets

### Materials:

- (1) Turned free-cutting steel shell with threaded stud (thread tolerance 6g).
- (2) Flat ferrite magnet.
- (3) Plastic spacer.

### Surface finish:


Smooth.

### Colour:

Standard blue galvanising.

### Special requests:

Upon request and for special quantities the steel shell of model T416 can be supplied black galvanised (720h salt spray resistance).

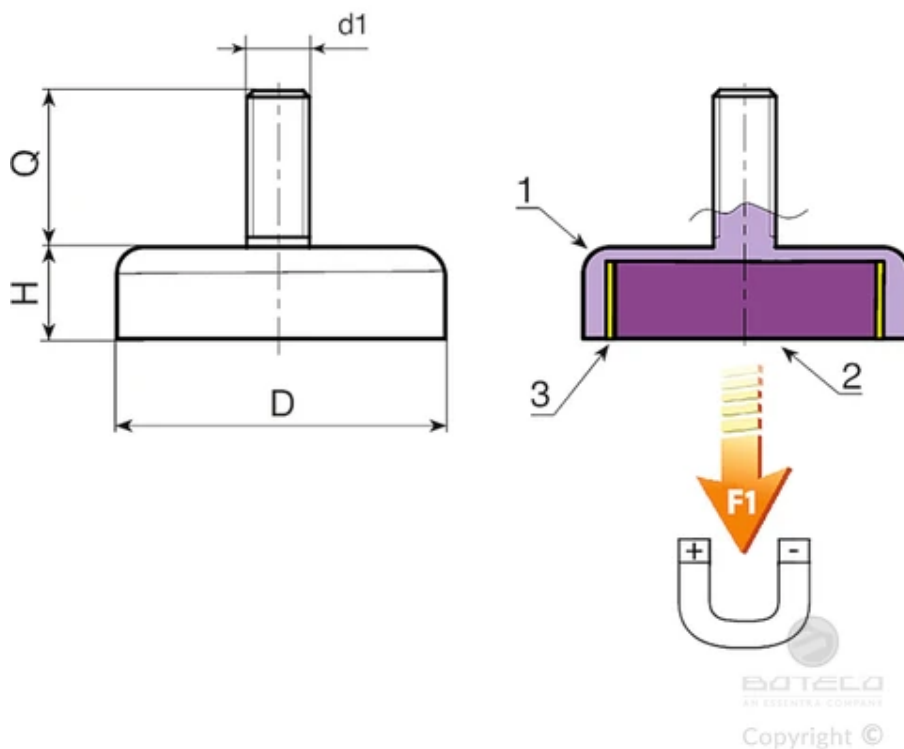

| Code         | art.             | D       | H ±0,2 | d1 6g | Q ±0,5 | Weight (g) | F1 (N) |
|--------------|------------------|---------|--------|-------|--------|------------|--------|
| T416010.0001 | T416010.VZM03X07 | 10 ±0,1 | 4,5    | M3    | 07     | 2          | 4      |
| T416013.0001 | T416013.VZM03X07 | 13 ±0,1 | 4,5    | M3    | 07     | 3          | 10     |

| Code         | art.             | D            | H ±0,2 | d1 6g | Q ±0,5 | Weight (g) | F1 (N) |
|--------------|------------------|--------------|--------|-------|--------|------------|--------|
| T416016.0001 | T416016.VZM03X07 | 16 ±0,1      | 4,5    | M3    | 07     | 5          | 18     |
| T416016.0002 | T416016.VZM04X06 | 16 ±0,1      | 4,5    | M4    | 06     | 5          | 18     |
| T416020.0001 | T416020.VZM03X07 | 20 ±0,1      | 6      | M3    | 07     | 10         | 30     |
| T416020.0002 | T416020.VZM06X30 | 20 ±0,1      | 6      | M6    | 30     | 15         | 30     |
| T416025.0001 | T416025.VZM04X08 | 25 ±0,1      | 7      | M4    | 08     | 19         | 40     |
| T416025.0002 | T416025.VZM05X15 | 25 ±0,1      | 7      | M5    | 15     | 20         | 40     |
| T416025.0003 | T416025.VZM06X20 | 25 ±0,1      | 7      | M6    | 20     | 22         | 40     |
| T416032.0001 | T416032.VZM04X08 | 32 ±0,1      | 7      | M4    | 08     | 30         | 80     |
| T416032.0002 | T416032.VZM06X12 | 32 ±0,1      | 7      | M6    | 12     | 31         | 80     |
| T416032.0003 | T416032.VZM08X10 | 32 ±0,1      | 7      | M8    | 10     | 32         | 80     |
| T416047.0001 | T416047.VZM06X08 | 47 +0,2/-0,1 | 9      | M6    | 08     | 85         | 180    |
| T416057.0001 | T416057.VZM06X08 | 57 +0,3/-0,1 | 10,5   | M6    | 08     | 146        | 280    |
| T416063.0001 | T416063.VZM06X15 | 63 +0,3/-0,1 | 14     | M6    | 15     | 233        | 350    |