


W510



01

FLAT METAL FIXED LEVER WITH INCLINED HANDLE

Fixed clamping levers

Materials:

Steel with strength class 5.8.

Surface finish:

Turned with low roughness.

Colour:

Nickel plated (galvanic treatment).

Alternative finishes:

Black-oxide treatment:

(replace the final letter of the code (H) with letter B
(W510082.SD0801B).

Galvanising:

(replace the final letter of the code (H) with letter Z
(W510082.SD0801Z).

Handgrip:

Ball knob I104 in reinforced PA6 in black (Ral 9011).

Handgrip fixing method:

Push-fit, removable.

Hole:

Blind smooth bore machined from solid metal (bore tolerance
H10).

Central Cap:

Grey polyamide (RAL 7035). 13).

Fixing method:

For fixing systems, or execution of keyways or square holes,
please refer to the technical notes attached to the catalogue.


Special requests:

Upon request and for special quantities levers can be supplied
with custom hole diameter d1.

Upon request and for special quantities handgrip available in the
colours indicated in the chart.



BOTEC
Copyright ©

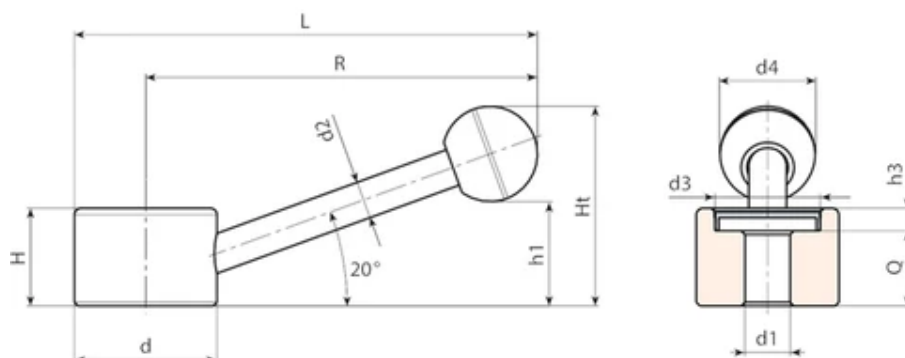

Code	Art.	d	R	L	H	Ht	h1	h3	d2	d3	d4	d1 H10	Q	Weight (g)
W510082.0005	W510082.SD1001H	30	82	97	22	43	23	6	8	22	20	10	16	118
W510104.0003	W510104.SD1001H	38	104	123	26	53	28	6	10	28	25	10	20	235
W510104.0004	W510104.SD1201H	38	104	123	26	53	28	6	10	28	25	12	20	230

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10).