

KNOB WITH LOCKING FULL STAINLESS STEEL INDEXING PLUNGER

Fine pitch indexing plungers - full stainless steel

Materials:

- (1) Stainless steel plunger pin (Aisi 303).
- (2) Threaded stainless steel hexagon ring nut (Aisi 303).
- (3) Stainless steel spring (Aisi 301).
- (4) Turned stainless steel lobed knob (Aisi 303).

Surface finish:

Satin.

Colour:

Natural.

ATTENTION:


> We recommend an H7 tolerance for the plunger stem bore.

Special Requests:

Upon request and for special quantities the plunger can be supplied completely disassembled.



BOTECO
Brevetti e Licenze
Copyright ©

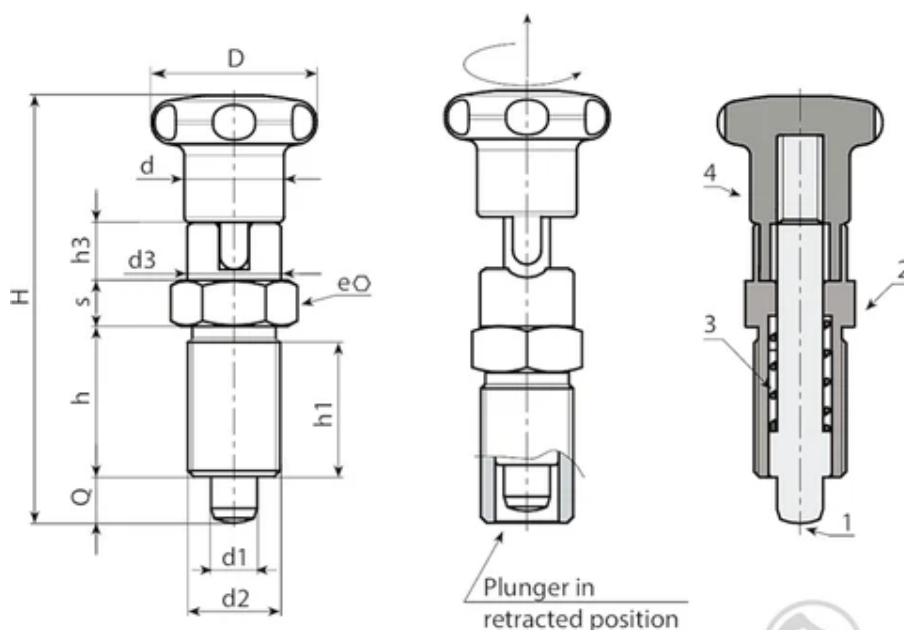

© Copyright
Boteco srl Unipersonale

Version W722 CIN - without nut

Code	Art.	D	H	h	h1	h3	d2	d	d3	e	s	d1 -0,02 -0,04	Q	Weight (g)
W722.0001	W722.I0501CIN	22	52	17	15	6.5	M10x1	12	12	12	5	5	5	-
W722.0002	W722.I0601CIN	27	61	20	18	7.5	M12x1,5	14	14	14	6	6	6	-
W722.0004	W722.I0801CIN	32	77	26	23	9.5	M16x1,5	19	19	19	8	8	8	-
W722.0005	W722.I1001CIN	32	90	33	30	11.5	M20x1,5	19	19	22	10	10	10	210